
EFDA–JET–CP(06)03-29

D. Alves, R. Coelho, S. Reyes Cortes, N. Hawkes
and JET-EFDA Contributors

MSE Diagnostic Signal Processing using Software Phase Locked Loop and Empirical Mode Decomposition

“This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

MSE Diagnostic Signal Processing using Software Phase Locked Loop and Empirical Mode Decomposition

VD. Alves¹, R. Coelho¹, S. Reyes Cortes², N. Hawkes³
and JET-EFDA Contributors*

¹*Associação Euratom/IST, Centro de Fusão Nuclear, 1049-001 Lisboa, Portugal*

²*Associação Euratom/IST, Departamento de Física Universidade da Beira Interior, Covilhã, Portugal*

³*EURATOM/UKAEA Fusion Association, Culham Science Centre, Abingdon, OX14 3DB, UK*

** See annex of J. Pamela et al, "Overview of JET Results",
(Proc. \square IAEA Fusion Energy Conference, Vilamoura, Portugal (2004).*

Preprint of Paper to be submitted for publication in Proceedings of the
33rd EPS Conference,
(Rome, Italy 19-23 June 2006)

1. INTRODUCTION

The continuous progress in fusion plasma technology and comprehension of the stability and confinement properties of Tokamak fusion plasmas offers encouraging support for the success of ITER. Plasma diagnostics are essential for real time plasma control and the reconstruction of important plasma radial profiles such as the ion/electron temperatures and densities, ion toroidal angular rotation, the plasma current density and the safety factor $q(R)$. The latter two, in particular, are essential for the assessment of the discharge operational regime (ohmic, reversed shear or hybrid) and for the integrated plasma modelling. Probing directly inside the plasma, the Motional Stark Effect (MSE) diagnostic is one of the best techniques to evaluate the radial q -profile[1]. In the MSE diagnostic installed at JET[2], the direct determination of the magnetic field pitch angle is made measuring the polarisation angle of the $+\pi$ component of the Stark splitting of the Balmer D_α emission from deuterium atoms injected by the heating neutral beams[3]. Polarised light from all 25 spatial channels, covering the full outboard minor radius, is intensity modulated at characteristic frequencies, 20 and 23kHz, by two photo-elastic modulators (PEMs). Making use of a set of 25 Avalanche Photo Diodes (APDs) and associated fast tunable narrow band filters, one gets Amplitude Modulated (AM) (at harmonics of the PEM modulation frequencies)[4] electrical signals which are then digitized at 250 KSample/s.

2. SOFTWARE PLL IMPLEMENTATION AND PITCH ANGLE PROCESSING

The following sub-section describes the kernel of the MSE diagnostic signal processing including the PLL algorithm, the basis of the pitch angle calculation. Sub-section 2.2 addresses the pitch angle post-processing used not only to improve signal to noise ratio but also to provide the user the capability of selecting relevant time scale events.

2.1 - PHASE-LOCKED LOOP AND AMPLITUDE EXTRACTION

The quality of the inferred pitch angle ($\gamma = B_\theta/B_\varphi$) depends strongly on the algorithm used for the determination of the amplitudes of the DC, 23, 40 and 46kHz frequencies (due to the particular MSE setup at JET) present in the APD signals. Although a hardware PLL implementation should be more qualified for this purpose, in JET the software approach has been preferred. Since the PEMs excitation waveforms are non-pure square waves, it is possible, with appropriate Band-Pass Filters (BPFs), to extract waveforms correspondent to odd and even harmonics of the fundamental excitation frequencies. Since the waveforms are not normalised, as an alternative to performing a least square fit with a fixed frequency (20 and 23kHz), we have found more appropriate to obtain the instantaneous phase (φ) of the desired harmonics. A 500Hz band-pass FIR is firstly applied (centred about each pertinent frequency) and the correspondent analytical signal is built using the Hilbert transform. Mixing the $\cos(\varphi)$ and $\sin(\varphi)$ signals with the APD and extracting DC yields the in-phase and quadrature amplitudes of the required frequencies. At this point, standard decimation is performed to 1 KSample/s. Extraction of the harmonic amplitudes requires minimisation of the quadrature signals. In our implementation, a simple (shot and channel dependent) linear regression yielding $\tan(\theta_{Rot})$ is done on the I-Q plot in

order to apply a rotation matrix to both in-phase and quadrature amplitude signals, guaranteeing optimal performance for every shot/channel in a fully automatic way. We could also use the Hilbert transform to extract the relevant instantaneous amplitudes of the BPF APD components, without resorting to the PEMs excitation waveforms. However, an offset in the extracted amplitudes due to rms noise effects and an inadequacy to follow sign changes in the amplitudes (in particular the 23kHz but also in the 46kHz harmonics) are significant handicaps that discourage such a scheme. A Matlab based Graphical User Interface (GUI) has been developed for reading/processing JET MSE data, making use of MDSplus and the above PLL. Since the full record of 750 kSample signal is read/processed for each channel, benchmarks indicated an average of 10 minutes to extract the complete set of amplitude signals required for each shot. A significant improvement in the overall performance is achieved with an implementation of the Local Area Multicomputer Message Passing Interface environment for Matlab, with a fully portable MPI standard compliant Application Programming Interface. The processing is spread over 5 nodes, taking full advantage of the JET Analysis Cluster (JAC), yielding an average computational elapsed time of the order of 4 minutes for typical JAC usage.

2.2. PITCH-ANGLE POST-PROCESSING

In JET, the magnetic field pitch-angle (γ) can be extracted using the following relation:

$$\tan (2\gamma(t)) = \frac{C_{21} A_{DC} (t) + C_{22} A_{23} (t) + C_{23} A_{46} (t) + C_{24} A_{40} (t)}{C_{11} A_{DC} (t) + C_{12} A_{23} (t) + C_{13} A_{46} (t) + C_{14} A_{40} (t)}$$

where $A_{xx}(t)$ are the xx component amplitudes mentioned previously and C_{ij} are diagnostic calibration coefficients [5]. It is important to offer the user the capability of selectiveness in terms of relevant time scales of the γ evolution. The limitation of 3000 samples discourages the use of linear phase (FIR) filters and conventional (moving average) smoothing of data provides inadequate frequency response. Empirical Mode Decomposition (EMD)[6] is a powerful method for extracting individual frequency events in the time domain, acting as a user-interactive adaptive filter bank. Through a sifting process, a signal is decomposed into elementary signals, called Intrinsic Mode Functions (IMFs) with the same length as the original signal and meaningful instantaneous frequency, plus a residue (basically the DC signal trend). Orderly subtracting IMFs from the original signal gradually removes distinct time scale events whilst preserving local signal trend. A good example of EMD performance is shown in Figure 1, where only the highest frequency IMF (1st out of a total of 6 IMFs plus the residue) is removed from the original signal. Since EMD is a signal dependent process, increasing the time window of interest will, in general, result on an increasing number of IMFs and some frequency leakage among neighbouring IMFs. Therefore, the relevant IMFs containing the time scales of interest to the user may differ, depending on the signal length and stopping criteria[7].

3. APPLICATION TO EQUILIBRIUM RECONSTRUCTION

The MSE signals processed with the EMD technique in a time scale of one millisecond, have been used as constraint for EFIT code in JET discharge 66558. The reconstructed equilibrium profiles are shown in Figure 2. Here the red traces represent the profiles obtained using the EMD technique, while the blue curves corresponds to profiles where the MSE data was smoothed to 20 milliseconds which is a routine procedure at JET. From Figure 2 it is possible to observe very little changes in using both methods. For this time slice some evidence (by means of Alfvén cascades activity) to support a slightly reversed q-profile would be possible, therefore one cannot rule it out completely.

CONCLUSIONS

The software PLL scheme described here allows for frequency jitter tracking in a bandwidth of 500 Hz as opposed to the (fixed frequency) least-square fit currently applied. In addition, optimal quadrature minimisation is guaranteed for every channel/shot reducing error propagation in the pitch angle and q-profile calculation. The EMD technique can be used offline as an alternative to the conventional smoothing of MSE data improving high frequency filtering performance whilst maintaining local signal trend. Future work involves the application of the EMD technique in pulses where the detrimental effect of ELMs in the MSE signals is most severe.

ACKNOWLEDGEMENTS

This work has been carried out within the framework of the Contract of Association between the European Atomic Energy Community and “Instituto Superior Técnico”. Financial support was also received from “Fundação para a Ciência e Tecnologia” and “Programa Operacional Ciência, Tecnologia, Inovação do Quadro Comunitário de Apoio III”.

REFERENCES

- [1]. F.M. Levington et al, Phys. Fluids B 5, 2554 (1993).
- [2]. N.C. Hawkes et al, Rev. Sci. Instrum. **70**, 894 (1999).
- [3]. F.M. Levington et al, Rev. Sci. Instrum. **61**, 2914 (1990).
- [4]. B.C. Stratton et al, Rev. Sci. Instrum. **70**, 898 (1999).
- [5]. Yuejiang Shi, Rev. Sci. Instrum. **77**, 023503 (2006).
- [6]. N.E. Huang et al, Proc. R. Soc. Lond. A 454, 903-995 (1998).
- [7]. G. Rilling et al, Proc. IEEE-EURASIP Workshop on Non-linear Signal and Imaging Processing NSIP-03, (2003).

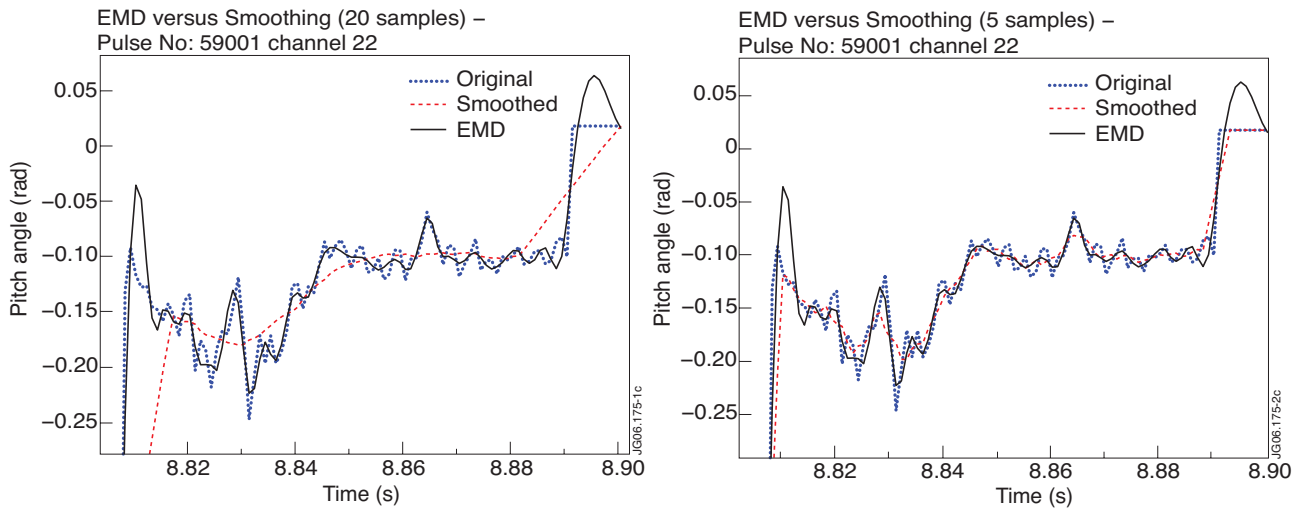


Figure 1: Comparative performance between EMD and boxcar smoothing 20ms (left) and 5ms (right)

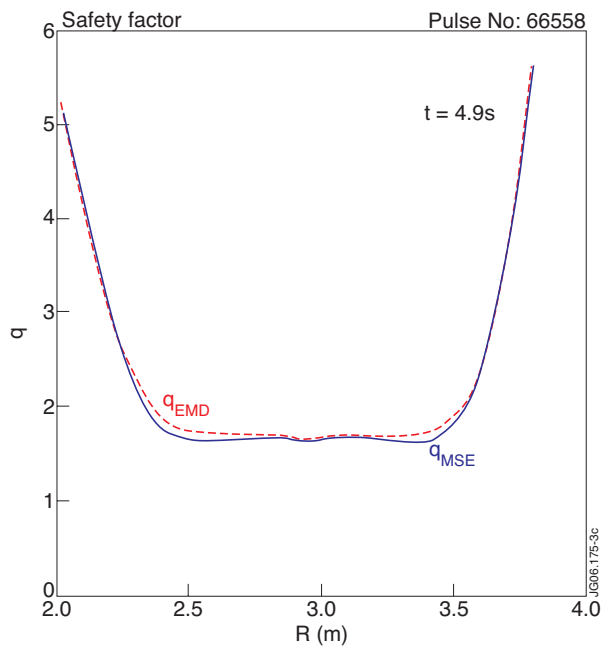


Figure 2: Equilibrium reconstruction profiles with MSE data smoothed to 20 milliseconds (blue curve) and processed with the EMD technique (red curve) in 1 millisecond time scale.