
EFDA–JET–CP(07)03/13

H.R. Koslowski, Y. Liang, P.R. Thomas, E. Nardon, S. Jachmich, Y. Baranov,
M. Bécoulet, M. Beurskens, E. De La Luna, P. de Vries, T. Eich, W. Fundamenski,
M.P. Gryaznevich, D. Howell, N. Hawkes, M. Jakubowski, S. D. Pinches,
O. Schmitz, O. Zimmermann and JET-EFDA contributors

Type-I ELM Mitigation in High Triangularity and Steady State Regimes using Low n External Magnetic Perturbation Fields on JET

"This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK."

"Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK."

Type-I ELM Mitigation in High Triangularity and Steady State Regimes using Low n External Magnetic Perturbation Fields on JET

H.R. Koslowski¹, Y. Liang¹, P.R. Thomas², E. Nardon², S. Jachmich³, Y. Baranov⁴, M. Bécoulet², M. Beurskens⁴, E. De La Luna⁵, P. de Vries⁴, T. Eich⁶, W. Fundamenski⁴, M.P. Gryaznevich⁴, D. Howell⁴, N. Hawkes⁴, M. Jakubowski¹, S. D. Pinches⁴, O. Schmitz¹, O. Zimmermann¹ and JET-EFDA contributors*

¹Association EURATOM-Forschungszentrum Jülich GmbH, IEF-4, Trilateral Euregio Cluster, D-52425 Jülich, Germany

²Association EURATOM-CEA, 13108 St Paul-lez-Durance, France

³Association EURATOM-Belgian State, KMS-ERM, B-1000 Brussels, Belgium

⁴EURATOM-UKAEA Fusion Association, Culham Science Centre, OX14 3DB, Abingdon, Oxon, UK

⁵Asociación EURATOM-CIEMAT, E-28040 Madrid, Spain

⁶Association EURATOM-Max-Planck-Institut für Plasmaphysik, D-85748 Garching, Germany

* See annex of M.L. Watkins et al, "Overview of JET Results", (Proc. 21st IAEA Fusion Energy Conference, Chengdu, China (2006)).

Preprint of Paper to be submitted for publication in Proceedings of the
34th EPS Conference on Plasma Physics,
(Warsaw, Poland 2nd - 6th July 2007)

1. INTRODUCTION

Data on the expected characteristics of disruptions and on the nature and magnitude of disruption effects are needed for the design and functional validation of ITER components and systems. A new International Disruption Database (IDDB) has been established by the International Tokamak Physics Activity (ITPA) Topical Group on MHD, Disruption and Magnetic Control. Version 1 of the database, hosted by General Atomics, now comprises device attributes and data from a total of 3875 discharges that end in disruption or some similar type of fast plasma-current terminating event (e.g. a Vertical Displacement Event (VDE) or a Massive Gas Injection (MGI) fast plasma shutdown). The present content represents submissions from eight devices: Alcator C-Mod (2167), ASDEX Upgrade (51), DIII-D (1153), JET (200), JT-60U (20), MAST (55), NSTX (200) and TCV (29). The data cover the ranges of major radius $0.54 \leq R(\text{m}) \leq 3.19$ and plasma current $0.08 \leq I_p(\text{MA}) \leq 3.42$, as shown in figure 1, and an aspect ratio range of $1.27 \leq R/a \leq 6.62$. The examples with $R/a > 4.09$ arise from a small number of reduced-minor-radius examples contained within the DIII-D data. With these data excepted, the effective range of aspect ratio for the collective v.1 data set is $1.27 \leq R/a \leq \sim 4.1$. Data content of v.1 comprises some 70 scalar variables that quantify the contributing device and device-specific configuration attributes, before-disruption plasma current, shape and other disruption-relevant magnetic and kinetic attributes, plus detailed data on the rate and waveform characteristics of the plasma current decay.

2. CURRENT QUENCH RATES

The first application of the database has been in determining the fastest I_p quench rate, which is important in calculating the loading on ITER blanket modules [2]. For this study the Current Quench (CQ) time is defined as

$$t_{\text{CQ}} = 5/3 \Delta t_{60} = 5/3 (t_{20} - t_{80}) \quad (1)$$

where t_{80} and t_{20} are respectively the times for the plasma current to decay, after disruption onset, to 80% and 20% of the initial before-disruption plasma current, I_{p0} . In contrast to the previous *ad hoc* current quench database content used for [2,3], the v.1 contributed data now uniformly comprise directly-measured t_{80} and t_{20} values. It should be noted that although the current quench time is linearly extrapolated from the 80-20% quench time, there is no presumption the decay is of that form (see [2] for a discussion on this issue). Figure 2 shows the quench times of the v.1 data normalized by the plasma area (S) versus the current density, defined as $j_p = I_{p0}/S$. The basis for normalising the current decay time (t_{CQ}) by S is discussed in [3] and the data are plotted versus j_p (as in the *IPB* [3]) as a convenient way to display data from a range of tokamaks and to connect present data to the range of current densities expected in ITER (the pink-shaded domain indicated in figure†2). The NSTX and MAST data clearly have faster I_p -quench rates than the conventional R/a tokamaks. The lower bound for the low aspect ratio data is $t_{\text{CQ}}/S \geq 0.6 \text{ ms/m}^2$, about 3 times

lower than the bound for the standard aspect ratio data. However, figure 3 shows that when the area-normalized CQ times for all of the v.1 tokamaks are further normalized by their respective dimensionless self-inductance factors, $L^* = \ln(8R/a) - 1.75$, the low aspect ratio data now approximately overlays the similar- j_p data from the other standard aspect ratio tokamaks. We caution that the accuracy of our present inductance renormalization procedure is not sufficient to support fine-scale distinctions between the minimum renormalized current quench times for low versus conventional aspect ratio tokamaks.

Neglecting for the moment the NSTX and MAST data, we see from figure 2 that the DIII-D data has the fastest area-normalized CQs of the six standard-aspect-ratio tokamaks represented. In figure 4, we show a high-resolution plot of the fastest S -normalized DIII-D current quenches versus $1/q_{cyl} (=I_p(\text{MA})R(\text{m})/[5a^2(\text{m})B_t(\text{T})])$; the nominal ITER value of $1/q_{cyl} = 0.88$, which corresponds to $q_{95}=3$ (ITER scenario 2). Figure 4 shows a reasonably clear division of the data; around, and above the nominal ITER $1/q_{cyl}$ -value all data lie at or above $t_{CQ}/S = 1.67\text{ms/m}^2$. However, there are twelve data points (out of a total of 1153) with $t_{CQ}/S < 1.67\text{ms/m}^2$, at higher q_{cyl} values. The risk the fastest CQs pose to ITER is due to the CQ-induced rapid flux change at the first wall structure. For a given CQ rate, the larger the plasma current, the larger the induced voltage, so risk scales with the plasma current (or as $1/q_{cyl}$) and inversely with the CQ rate. Hence the diagonal line in figure 4 represents a line of equal risk from a disruption at a given toroidal field. Points above the diagonal line represent a reduced risk, compared to a disruption with $t_{CQ}/S = 1.67\text{ms/m}^2$ at full nominal current ($I_p = 15\text{MA}$) in ITER. Thus the points with $t_{CQ}/S < 1.67\text{ms/m}^2$ do not need to be accounted for in considering the fastest CQ in ITER. This is the basis for choosing $t_{CQ}/S = 1.7\text{ms/m}^2$ (to 2 significant figures) as the recommended fastest CQ rate ($t_{\min} \cong 36\text{ms}$ for $S = 21.3\text{m}^2$ in ITER). It should be noted that for the other two large v.1 IDDB datasets, from JET and C-Mod, the area-normalized lower bound is approximately 3.0ms/m^2 ; whereas the lower bounds for ASDEX Upgrade and JT-60U are $\sim 2.4\text{ms/m}^2$. We can find no simple explanation internal to the IDDB data as to why the DIII-D lower bound is noticeably lower than that of the other standard aspect ratio tokamaks. Also it should be noted that the database shows a large spread in CQ times, with the majority lying well above the fastest observed value of t_{CQ}/S – for example in DIII-D just 4.9% of the data has a quench time faster than 2ms/m^2 .

The discussion of CQ rates has been based on a linear extrapolation from 80 to 20% quench times. Extrapolations based on other %-intervals (starting from a maximum of 90% and going to a minimum of 10%) have also been explored and with a very limited number of exceptions the bound $t_{CQ}/S > 1.7\text{ms/m}^2$ is obeyed. Further an exponential fit to the I_p data (at 8 times during the decay) shows a lower CQ time bound that is very consistent with an exponential fit to the 80 and 20% data points.

FUTURE PLANS

Near-term future plans for the IDDB call for expansion of the v.1 data set to include detailed time-

dependent pre-disruption waveforms to allow pre-disruptive energy loss to be assessed. Also initial data on halo currents will be included. On a longer time scale, we anticipate further expansion of the IDDB data set to encompass thermal quench and plasma-facing-component energy deposition and comprehensive runaway electron related data.

ACKNOWLEDGEMENTS

This work was supported in part by the UK Engineering and Physical Sciences Research Council, by the European Communities under the contract of Association between EURATOM and UKAEA, and in part by the U.S. Department of Energy under DE-FC02-04ER54698 and DE-AC02-76CH03073. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

REFERENCES

- [1]. J.C. Wesley et al, 2006 IAEA Fusion Energy Conf (Chengdu, China), paper IT/P1-21
- [2]. M. Sugihara, IAEA FEC 2004 paper IT-P3/-29.
- [3]. ITER Physics Basis, Chapter 3, Nucl Fus **39** (1999) 2251.

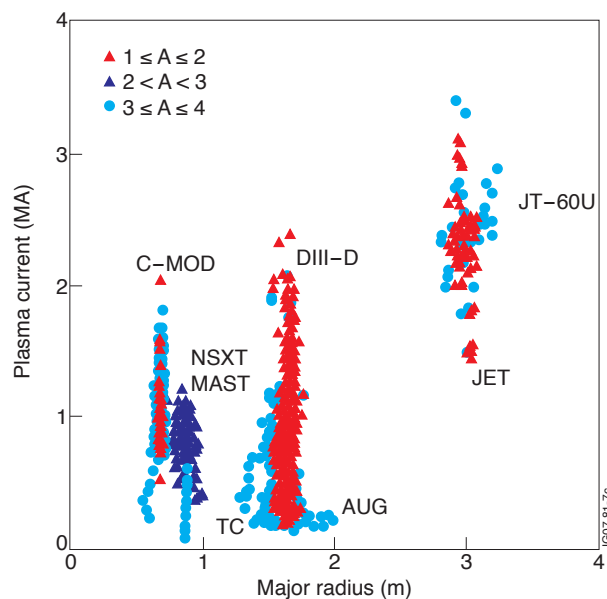


Figure 1: Ranges of plasma current, major radius and aspect ratio(A) encompassed by the IDDB data.

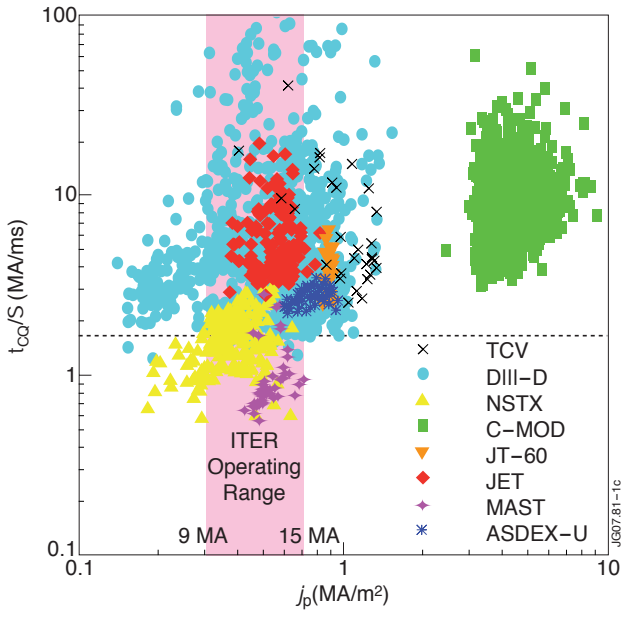


Figure 2: Area normalized CQ rate versus current density.

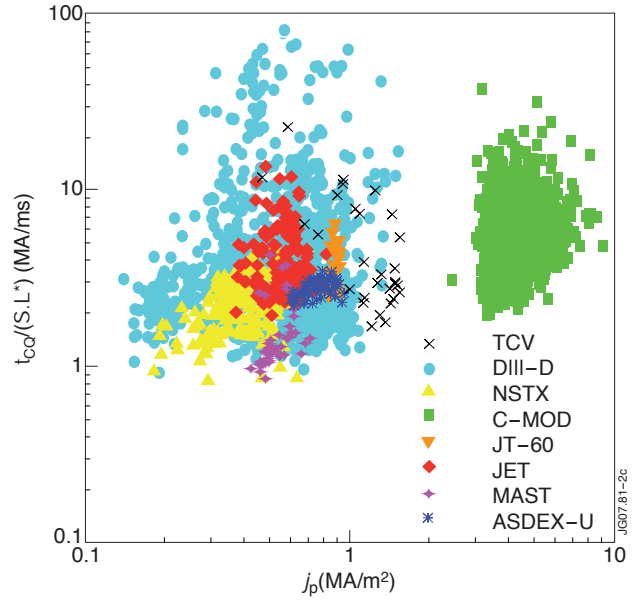


Figure 3: Area and inductance normalized CQ rate versus current density

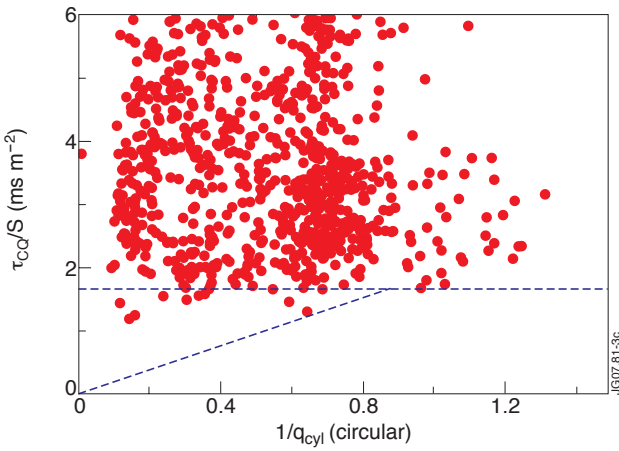


Figure 4: DIII-D data for t_{CQ}/S versus $1/q_{cyl}$. The diagonal line represents a line of equal disruption induced current at a given toroidal field.