

J. Vega, A. Murari, S. Dormido-Canto, D. Alves, G. Farias,  
J.M. López, R. Moreno, A. Pereira, J.M. Ramírez, G.A. Rattá  
and JET EFDA contributors

# Overview of Real-Time Disruption Prediction in JET: Applicability to ITER

“This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

The contents of this preprint and all other JET EFDA Preprints and Conference Papers are available to view online free at [www.iop.org/Jet](http://www.iop.org/Jet). This site has full search facilities and e-mail alert options. The diagrams contained within the PDFs on this site are hyperlinked from the year 1996 onwards.

# Overview of Real-Time Disruption Prediction in JET: Applicability to ITER

J. Vega<sup>1</sup>, A. Murari<sup>2</sup>, S. Dormido-Canto<sup>3</sup>, D. Alves<sup>4</sup>, G. Farias<sup>5</sup>,  
J.M. López<sup>6</sup>, R. Moreno<sup>1</sup>, A. Pereira<sup>1</sup>, J.M. Ramírez<sup>3</sup>, G.A. Rattá<sup>1</sup>  
and JET EFDA contributors\*

*JET-EFDA, Culham Science Centre, OX14 3DB, Abingdon, UK*

<sup>1</sup>*Laboratorio Nacional de Fusión. CIEMAT, Madrid, Spain*

<sup>2</sup>*Consorzio RFX, Padova, Italy*

<sup>3</sup>*Dpto. Informática y Automática. UNED, Madrid, Spain*

<sup>4</sup>*Instituto de Plasmas e Fusão Nuclear – Laboratório Associado, IST, Lisboa, Portugal*

<sup>5</sup>*Pontificia Universidad Católica de Valparaíso, Valparaíso, Chile*

<sup>6</sup>*Universidad Politécnica de Madrid. CAEND UPM-CSIC. Madrid. Spain*

\* *See annex of F. Romanelli et al, “Overview of JET Results”,  
(24th IAEA Fusion Energy Conference, San Diego, USA (2012)).*

Preprint of Paper to be submitted for publication in Proceedings of the  
41st EPS Conference on Plasma Physics, Berlin, Germany  
23rd June 2014 – 27th June 2014



## INTRODUCTION

Avoidance and mitigation of disruptions are crucial problems in ITER and are becoming increasingly relevant at JET with the installation of the new ITER-Like Wall (ILW). In order to do so, disruption prediction capability is a pre-requisite. This work summarizes the evolution of our research lines regarding disruption prediction at JET during the last years and discusses their potential applicability to ITER.

Disruption predictors are typically based on binary classification techniques. Given a dataset of  $N$  examples represented by pairs  $(\mathbf{x}_i, y_i, i = 1, \dots, N)$ , (where  $\mathbf{x}_i \in \mathbb{R}^m$  is a vector of dimension  $m$  that represents features of distinctive nature among the  $N$  examples and  $y_i \in \{+1, -1\}$  is the label about the plasma behaviour, *i.e.* disruptive or non-disruptive), a training process determines a mathematical function to split the feature space into two regions. After completing the training, new feature vectors  $\mathbf{x}_{new} \in \mathbb{R}^m$  are classified as disruptive or non-disruptive depending on the parameter space region where they are located.

We have tackled three main research topics about disruption prediction in JET from 2008: advanced predictors, advanced predictors from scratch and disruption time predictors. All of them are based on the fulfilment of four important requirements. Firstly, they use multidimensional data. Secondly, they are based on discovering relations between signals to identify a forthcoming disruption. Thirdly, they have been programmed to provide deterministic responses. Last but not least, they were designed to use only real-time signals.

## 1. PREDICTOR REQUIREMENTS

These requirements establish useful characteristics to be met by disruption predictors and summarize years of experience in fusion research on the development of predictors.

- The requirement for using *multidimensional data* comes from the fact that a single signal is not able to provide predictions of any type of disruption. In addition, it is important to note that the term “multidimensional data” is not only related to the use of several signals but also to the use of different signal domains (typically, time and frequency, but other domains are possible) [1].
- Existing theoretical models and simulation tools provide predictive performances far from the requirements [2]. Some related problems are: incomplete models, strong assumptions and non-physical boundary conditions. An alternative to this could be to infer empirical (*i.e.* data-driven) models using physics/engineering quantities not necessarily related to plasma physics.
- *Determinism* is the guarantee that two consecutive predictions will never exceed a certain time interval. This time interval is the minimum time needed to perform avoidance and mitigation actions after the recognition of an incoming disruption.
- Some predictors, which were tested off-line with pre-processed signals, showed degraded results when their input data was swapped for *real-time signals* [3]. Therefore, only signals from real-time diagnostics have to be considered.

## 2. ADVANCED PREDICTORS IN JET

Our first Advanced Predictor Of DISruptions (APODIS) in JET was trained/tested with the JET database between years 2000 and 2007 [4]. The main differences with previous predictors (either in JET or in other tokamaks) are: a) APODIS is based on a multi-layer architecture of Support Vector Machines (SVM) classifiers. b) The complete evolution of the discharges (from plasma breakdown to extinction) is considered for training/test purposes. c) The training/test database (2124 discharges) was the biggest one used in JET at that time. d) No bias was introduced in the types of disruptions considered.

Based on the above APODIS version, a new one was developed [5, 6] that differs in six aspects: a) installation in the JET real-time network, b) the amount of shots considered for training/test (8360 discharges between years 2006–2009), c) a different signal dataset, d) the signal representations (both time and frequency domain), e) an exhaustive data pre-processing to remove discharges with outlier signals and, finally, f) the use of high performance computing for training purposes. This second version of APODIS was used in ILW experiments. After 991 discharges corresponding to the three first JET ILW campaigns and without any retraining, the success rate of the predictor is 98.36% (alarms are triggered, on average, 426 ms before the disruptions, time to be compared with about 30 ms that is the minimum time in JET to take mitigation actions). The false alarm and missed alarm rates are 0.92% and 1.64% respectively.

To finish this section, it should be emphasised that APODIS is being used not only as a disruption predictor but also to investigate the physics of disruptions. As a first step, APODIS has been used in off-line mode to determine the point of no return (PNR) for JET disruptions. We define the PNR as the time instant from which the disruption has been unavoidable. By analysing the PNR of 191 JET disruptions with C wall of six experimental campaigns (between 2008 and 2009), the PNR times follow the distribution shown in figure 1. Additional research from the PNR is being carried out.

## 3. ADVANCED PREDICTORS FROM SCRATCH IN JET

This section is devoted to discussing the need of developing adaptive disruption predictors with very limited data for training. This is necessary because ITER cannot wait for hundreds of disruptions to train a predictor. Therefore, in order to address this issue, two different types of predictors from scratch [7, 8] were developed with 1237 JET discharges (of which, 201 were disruptive) from the three first ILW campaigns (years 2011 – 2012). In both adaptive cases, the discharges are used in chronological order to create predictors from scratch as the discharges are produced.

In predictions from scratch, the first training process, to distinguish between disruptive and non-disruptive behaviours, is carried out after the availability of at least 1 example of each class. In the two JET predictors [7, 8], a new retraining is performed after each missed alarm.

Reference [7] describes a predictor from scratch based on APODIS. The results with the 1237 JET discharges mentioned above (and used in chronological order) show that a high success rate (93.5%) and a low false alarm rate (2.3%) can be achieved after including in the training process

about 40 disruptive discharges. However, 40 disruptive discharges could be too large for the ITER needs and higher learning rate classifiers from scratch are necessary.

Reference [8] develops a probabilistic predictor based on the conformal prediction theory (in particular, a Venn predictor is used) [9]. An important characteristic of this type of predictor is that it qualifies each prediction not only with a probability but also with the corresponding error bar. The results after the chronological processing of 1237 JET discharges from the ILW campaigns show a good success rate (94%) and a low false alarm rate (4.2%), starting from the first disruption. The average probability interval about the reliability and accuracy of all the individual predictions is  $0.811 \pm 0.189$  and the average anticipation time to the disruption is 654ms. Therefore, this predictor does not need to wait for tens of disruptions but it shows a false alarm rate that is twice the one obtained with the APODIS from scratch predictor.

#### **4. DISRUPTION TIME PREDICTORS IN JET**

Three different works that deal with the problem of predicting the time-to-disruption (TTD) are [3, 10, 11]. The first one, [3], is based on a two-layer artificial neural network and was applied to the ASDEX Upgrade tokamak. The predictor generates a temporal evolution signal about the TTD on a periodic basis. An alarm is triggered when the TTD is below a certain time threshold that is empirically determined after the training process. The second work, [10], uses a fuzzy framework to achieve a suitable clustering of the input space and a complex structure of neural networks. The output is also a temporal evolution signal that gives the TTD on a periodic basis. Again, an alarm is triggered when the TTD is below a certain threshold that is empirically established. Reference [11] was applied to the JET database and was also based on artificial neural networks. The neural network output is obtained periodically and it is a real number between 0 and 1 that represents the risk of disruption. An alarm is triggered when the neural network output is above a certain threshold that is chosen minimizing a detection error function. The three above TTD predictors share the common policy that when the TTD estimation is below a certain threshold, an alarm is raised. Also, it is important to note that, firstly, they were tested with a limited number of discharges and, secondly, not all types of disruptions were considered.

A very recent work [12] tackles the development of disruption time predictors under a new approach. Instead of generating a temporal evolution signal to predict the time to disruption and to trigger the alarm when special conditions are met, the objective is to predict a disruptive behaviour and when the prediction is positive to simultaneously provide the time to disruption. To accomplish this, a special combination of individual predictors (based on SVM classifiers) is performed. The respective outputs (disruptive or non-disruptive behaviours) are combined into a single one and when the combined prediction is ‘disruptive’, the TTD is also provided.

1237 JET discharges (1036 safe and 201 disruptive) corresponding to the three first ILW experimental campaigns have been considered for the analysis. By randomly chosen 60% disruptive and 60% non-disruptive discharges for training, the remaining ones have been used for test. The

results include a success rate of 100% in the recognition of disruptive behaviours and a false alarm rate of 0.2%. All disruptions are predicted with a TTD of  $160 \pm 3$ ms, which reflects a high precision in the estimation. The exact time interval between the identification of the disruptive behaviour and the disruption itself was 160 ms, which means that the disruption time predictor is also very accurate. These results are independent of the initial dataset of random discharges for training.

## 5. FUTURE WORK IN THE VIEW OF ITER

The outcomes of the predictors from scratch are very promising. At present, two different predictors have been tested with all discharges of the three first ILW campaigns of JET. The first one requires tens of disruptions to be trained, but provide a lower false alarm rate. More research about these methods and even a combined version of them is necessary.

With regard to time to disruption predictors, it is important to note that they can be essential methods to activate optimal avoidance or mitigation actions, whose automatic selection can depend on the time to disruption predicted. Results in JET are very encouraging. Finally, it should be noted that the disruption time predictors analyzed do not follow a '*from scratch approach*'. Versions of disruption time predictors from scratch would be very desirable for ITER.

## ACKNOWLEDGMENTS

This work was partially funded by the Spanish Ministry of Economy and Competitiveness under the Projects No ENE2012-38970-C04-01, ENE2012-38970-C04-03 and ENE2012-38970-C04-04.


This work was partially funded by the Chilean Ministry of Education under the Project FONDECYT 11121590.

This work, supported by the European Communities under the contract of Association between EURATOM/CIEMAT, was carried out within the framework of the European Fusion Development Agreement. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

## REFERENCES

- [1]. G.A. Rattá et al. "Feature extraction for improved disruption prediction analysis at JET". Review of Scientific Instruments. **79**, 10F328 (2008).
- [2]. A.H. Boozer. Physics of Plasmas. **19**, 058101 (2012).
- [3]. G. Pautasso et al. "On-line prediction and mitigation of disruptions in ASDEX Upgrade". Nuclear Fusion. **42** (2002) 100–108.
- [4]. G.A. Rattá et al. "An Advanced Disruption Predictor for JET tested in a simulated Real Time Environment" Nuclear Fusion. **50** (2010) 025005 (10pp).
- [5]. J. Vega et al. "Results of the JET real-time disruption predictor in the ITER-like wall campaigns", Fusion Engineering and Design **88** (2013) 1228-1231.

- [6]. J.M. López et al. “Implementation of the Disruption Predictor APODIS in JET’s Real-Time Network Using the MARTe Framework”. *IEEE Transactions on Nuclear Science* **61**, 2 (2014), 741–744.
- [7]. S. Dormido-Canto et al. *Nuclear Fusion* **53** (2013) 113001 (8pp).
- [8]. J. Vega et al. “Adaptive high learning rate probabilistic disruption predictors from scratch for the next generation of tokamaks”. Submitted to *Nuclear Fusion*.
- [9]. V. Vovk, A. Gammernan, G. Shafer. “Algorithmic learning in a random world”. Springer (2005).
- [10]. F.C. Morabito et al. “Fuzzy-neural approaches to the prediction of disruptions in ASDEX Upgrade”. *Nuclear Fusion* **41**, 11 (2001) 1715–1723.
- [11]. B. Cannas et al. “Disruption forecasting at JET using neural networks”. *Nuclear Fusion* **44** (2004) 68–76.
- [12]. G. Farias et al. “Prediction of the time to disruption in JET with an ITER-like wall”. Submitted to *Nuclear Fusion*.

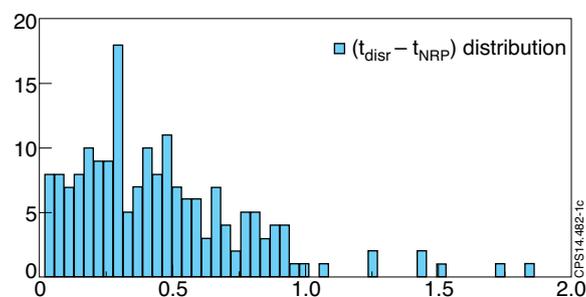

*Figure. 1: PNR times distribution from JET C wall data.*