
EFDA–JET–PR(03)02

K-D. Zastrow, S.J. Cox, M.G von Hellermann, M.G. O’Mullane, D. Stork,
M. Brix, C.D. Challis, I.H. Coffey, R. Dux, K.H. Finken, C. Giroud,
D. Hillis, J.T Hogan, K.D Lawson, T. Loarer, A.G. Meigs,
P.D. Morgan, M.F. Stamp and A.D. Whiteford

Helium Exhaust Experiments on JET with Type I ELMs in H-Mode and with Type III ELMs in ITB Discharges

Helium Exhaust Experiments on JET with Type I ELMs in H-Mode and with Type III ELMs in ITB Discharges

K-D. Zastrow¹, S.J. Cox¹, M.G von Hellermann², M.G. O'Mullane³, D. Stork¹,
M. Brix⁴, C.D. Challis¹, I.H. Coffey⁵, R. Dux⁶, K.H. Finken⁴, C. Giroud³,
D. Hillis⁷, J.T Hogan⁷, K.D Lawson¹, T. Loarer⁸, A.G. Meigs¹,
P.D. Morgan¹, M.F. Stamp¹ and A.D. Whiteford³
and contributors to the EFDA-JET workprogramme*

¹Euratom/UKAEA Fusion Association, Culham Science Centre, Abingdon, UK.

²FOM Instituut voor Plasmaphysica, Associatie Euratom, Nieuwegein, NL.

³Dept. of Physics, University of Strathclyde, Glasgow, UK.

⁴Forschungszentrum Jülich GmbH, IPP, Euratom Association, Jülich, Germany.

⁵Dept. of Physics, Queens University, Belfast, UK.

⁶Max-Planck-Institut für Plasmaphysik, Euratom Association, Garching, Germany.

⁷Oak Ridge National Laboratory, P.O. Box 2008, Oak Ridge, USA.

⁸Association EURATOM-CEA sur la Fusion, CEA Cadarache, St Paul-lez-Durance, France

* See annex of J. Pamela et al, "Overview of Recent JET Results and Future Perspectives",
Fusion Energy 2000 (Proc. 18th Int. Conf. Sorrento, 2000), IAEA, Vienna (2001).

“This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

ABSTRACT

An analysis of helium exhaust experiments on JET in the MkII-GB divertor configuration is presented. Helium is pumped by application of an argon frost layer on the divertor cryo pump. Helium exhaust in L-Mode and ELMy H-Mode discharges is studied by introduction of helium in gas puffs, and measurement of the subsequent decay of the helium content. In internal transport barrier (ITB) discharges, helium is introduced by beam injection and the helium replacement time is measured. In ELMy H-Mode, and with an optimised plasma configuration for pumping, $\tau_{\text{He}}^* \approx 7.2 \times \tau_{\text{E}}^{\text{th}}$ is achieved. For ITB discharges, the achieved $\tau_{\text{He}}^* \approx 4.1 \times \tau_{\text{E}}^{\text{th}}$ is significantly lower. The achieved helium recycling coefficient, confirmed by an independent measurement to be $R_{\text{eff}} \approx 0.91$, is the same in both scenarios. None of the discharges are dominated by core confinement. The difference in $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ is instead due to the confinement properties of the edge plasma, which is characterised by Type I ELMs for the H-Mode discharges studied, and Type III ELMs for the ITB discharges. This difference is quantified by independent measurement of the ratio of the helium replacement time with a helium edge source to the energy confinement time.

1. INTRODUCTION

Control of helium “ash” produced in D-T reactions is one of the key issues affecting the performance and achievable burn time of a fusion reactor. The removal of helium is determined by a combination of the intrinsic transport of helium in the plasma, especially across internal and edge transport barriers, the enrichment and compression of helium in the sub divertor region, and the pumping and refuelling efficiency for helium. Thus the task is one of system integration and is only partially determined by plasma physics. The overall engineering requirement is best stated [1] in terms of the ratio of the helium retention time, τ_{He}^* , to the thermal energy confinement time, $\tau_{\text{E}}^{\text{th}}$, since effective α particle heating is essential in a burning fusion plasma. If small levels of additional impurities are present, the requirement is for $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} \leq 10$ to obtain steady state burn conditions. With additional impurities the requirement becomes more strict, e.g. $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} \leq 5$ would be required if carbon concentrations were of order 3%. The target for the pumping arrangement is specified in terms of the helium enrichment factor, η , i.e. the ratio of the partial pressures of helium and deuterium in the sub divertor region (at the pump throat) to the ratio of He^{2+} to D^+ in the plasma core, which needs to be larger than 0.2 for stationary operation of ITER [2].

A recent review of the research on helium transport and exhaust has been written by Hogan [3]. In most experiments helium is introduced by gas puffs and the decay of the helium content is studied. On DIII-D and JT-60U, helium neutral beam injection was used to provide a central source [4,5,6,7] so that the replacement time can be measured. In L-Mode and ELMy H-Modes it was always found that the helium exhaust rate is limited by the pumping efficiency and not by the helium transport in the plasma edge let alone the plasma core. The achieved ratio $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ has been low enough and it has been shown that helium can be pumped at a satisfactory rate by divertor pumping, which is the method used in the majority of experiments, and also with pumped limiters [8].

Improved core confinement by the formation and sustainment of internal transport barriers (ITBs) is seen as a possible route to steady state tokamak operation because of the potential of this regime for full non-inductive current drive. However, helium removal from the ITB core might not be fast enough and would thus limit the burn time. Results from experiments in JT-60U ITB discharges indicate increased helium retention in the ITB core by factors between two and three [6,7], due to reduced diffusivity by a factor five to six [9]. Also there is concern that, since ITB discharges to date tend to be characterised by lower edge density than ELMy H-Mode plasmas, the potential for pumping of helium might be reduced, i.e. η might be too small. To investigate both issues, a series of experiments was conducted on JET during helium plasma operation. For comparison, we also report results in ELMy H-Modes from earlier experiments in this paper.

In Ref. [1], two characteristic times have been introduced to quantify retention, the replacement time for a central source, S_0 , defined as $\tau_0 = N_{\text{He}}/S_0$ and the replacement time for an edge source, S_{edge} , defined as $\tau_{\text{edge}} = N_{\text{He}}/S_{\text{edge}}$. N_{He} is the plasma helium content that is sustained by the source in each case. In this context, the “edge” is a region of confined plasma, not a region of open field lines. Note that in this paper we use different symbols than in Ref. [1], namely an index that refers to the location of the source (“0” and “edge”). The definition is the same.

In a numerical model both τ_0 and τ_{edge} can readily be calculated, whereas in experiments only τ_{edge} can be measured. This is because the effect of helium recycling can not completely be removed, so an experiment with only a central source cannot be performed. The relationship of the observed retention time with refuelling efficiency f and recycling is given by Equations (5.6) and (5.10) from Ref. [1] which we reproduce here:

$$\tau^* = \tau_0 + \tau_{\text{edge}} \frac{R_{\text{eff}}}{1 - R_{\text{eff}}} \quad (1)$$

$$R_{\text{eff}} = R_{\text{ret}} f \frac{1}{1 - (1 - f) R_{\text{ret}}} \quad (2)$$

where R_{ret} is the fraction of helium returning from wall and divertor and $R_{\text{eff}} = \Gamma_{\text{ion}}/\Gamma_{\text{out}}$ is the fraction of the helium outflux, Γ_{out} , that is returning to the confined plasma as an edge influx, Γ_{ion} , of helium ions.

The prediction of R_{eff} for ITER can not be the subject of experimental studies on existing devices since R_{ret} depends on divertor geometry and the helium pumping speed and f depends on the details of the scrape-off layer plasma. Both of these are likely to be very different, and require modelling [10] to be assessed. The goal we have set ourselves in this study is to determine the contribution of τ_{edge} to τ_{He}^* for each operational regime, which can potentially be scaled to ITER.

In all experiments reported in this paper we make use of the helium pumping capability of the JET pumped divertor. Details on the pumping arrangement and calibration of the pumping speed for helium are given in section 2. The results on helium retention in ELMy H-Mode discharges are presented briefly in section 3. Helium ash simulation experiments in ITB discharges are presented in detail in section 4 and the results from all regimes are compared in section 5 by independent measurement of R_{eff} and τ_{edge} . We have used two different techniques to study helium retention,

measurement of the decay time and the replacement time. A comparison of these techniques, from a model point of view, is presented in Appendix 1 and a discussion of statistical and systematic errors in the experiments in Appendix 2.

2. HELIUM PUMPING SCHEME IN THE JET MKII-GB DIVERTOR

All experiments presented in this paper were performed during campaigns with the JET divertor in the MkII-GB configuration [11]. Helium can be pumped by application of a layer of argon frost on the divertor cryo pump (ArFCP). The pumping speed for helium on the vessel, $S_V(\text{He})$, has been characterised as a function of various argon frost coatings using sequential helium and deuterium gas pulses. The calibration established the systematic behaviour of the pumping speed as a function of the ratio of the D_2+He gas condensed on the supercritical helium cooled panels to the amount of argon frost condensed, i.e. $N(\text{D}_2+\text{He})/N(\text{Ar})$, termed saturation. This ratio is a function of time into each discharge and has to be evaluated to obtain the rate of helium removal during the experiment. The pumping speed for helium is a universal function of the amount of argon laid down in the most recent frosting; specifically it does not depend on the thickness of the argon layer and a refresh layer restores $S_V(\text{He})$ to its original value. The maximum values that could be achieved were $S_V(\text{He})=85\text{-}95 \text{ m}^3/\text{sec}$. For comparison, the pumping speed of the divertor cryo pump for deuterium on the JET vessel is $S_V(\text{D}_2)=125 \text{ m}^3/\text{sec}$ [12].

The helium pumping speed on the vessel was measured to be $S_V(\text{He})=20\text{-}55 \text{ m}^3/\text{sec}$ after a JET discharge using puffs of helium gas into the torus. These results are shown in Fig. 1. The effect of loading on the argon layer did not have quite the same effect as in the earlier gas-only calibration runs, showing that the effect is dependent on the way deuterium is introduced. Specifically, the pumping speed for the same level of calculated saturation was higher after a plasma discharge than after gas only deposition. However no difference is seen depending on the way helium was introduced in the discharge preceding the calibration pulse, i.e. whether by gas puff or by beams.

After a discharge, the pumping speed can be restored by repeated argon frosting until a total of $60 \text{ bar} \times \text{l}$ of argon has been deposited on the pumps. At higher deposition values argon may be released which degrades the plasma purity, and carries the risk of causing disruptions.

In Fig. 1 the saturation is calculated from the amount of argon applied in the most recent frost (typically $30 \text{ bar} \times \text{l}$ in the first frost and $10 \text{ bar} \times \text{l}$ for refresh layers), and by integration in time of the amount of helium and deuterium that was condensed on the pump. The calculation uses the time resolved measurement of the partial pressures p of helium and deuterium in the sub divertor region, obtained from the analysis of light emitted by a Penning gauge [13,14], and the pumping speeds S_{Div} on the sub divertor region for the two species:

$$N(\text{D}_2 + \text{He}) = \frac{1}{kT} \int (p(\text{D}_2) \times S_{\text{Div}}(\text{D}_2) + p(\text{He}) \times S_{\text{Div}}(\text{He})) dt \quad (3).$$

The saturation is dominated by the amount of deuterium, since this is the majority species and

because the pumping speed for deuterium is higher and not dependent on the saturation of the cryo pump. The pumping speed for helium is self-consistently calculated using the saturation as function of time and interpolated using a cubic spline fit to the data in Fig. 1 (shown as a solid line) for the pumping speed itself. We use $S_{\text{Div}}(\text{D}_2)=110 \text{ m}^3/\text{sec}$ [12] and assume $S_{\text{Div}}(\text{He})/S_{\text{V}}(\text{He})=110/125$ at all times. All measurements for partial pressures and pumping speed, as well as for the amount of argon used in the frost, are referred to room temperature [12].

Finally we note that the mean helium removal rate of the JET ArFCP with strike points in the corner configuration is

$$S_{\text{Div}}(\text{He}) \times p_{\text{Div}} \approx 50 \frac{\text{m}^3}{\text{sec}} \times 3.5 \times 10^{-5} \text{ mbar} \approx 1.8 \times 10^{-3} \frac{\text{mbar m}^3}{\text{sec}} \quad (4)$$

Thus the ratio of removal rate to plasma volume ($S_{\text{Div}}(\text{He}) \times p_{\text{Div}}(\text{He})/V_{\text{P}}$ with $V_{\text{P}} \approx 80 \text{ m}^3$ for JET) is similar to the design basis ratio for ITER, i.e. $2.3 \times 10^{-5} \text{ mbar/sec}$ for JET compared to $1.8 \times 10^{-5} \text{ mbar/sec}$ for ITER [15].

3. RATE OF DECAY OF HELIUM CONTENT IN TYPE I ELMY H-MODE

All ELMy H-Mode discharges were performed at 1.94T, 1.9MA and with 10-14 MW of neutral beam injection (NBI) heating. The configuration chosen had an elongation of 1.68-1.74, and a triangularity of 0.26-0.30. The discharges had Type I ELMs and achieved a thermal confinement enhancement factor as given by the IPB(98(y,2)) scaling law [16] of 1.1-1.3. The discharges had low $Z_{\text{eff}} \approx 2$ based on the local measurements of impurity densities (He, Be and C) with little sign of argon. A detailed study on helium enrichment on JET, which includes these discharges, has previously been published by Groth *et al.* [13]. Therefore we only discuss the results for $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ in this section.

The achievable helium removal rate is affected by the location of the divertor strike points due to changes in the conductance for neutrals between the main chamber and the sub-divertor region [13]. To illustrate this, a comparison of a corner strike zone (C) discharge with a vertical target strike zone (VT) discharge is shown in Fig.2. The decay time τ_{He}^* is much lower in the corner configuration, due to the enhanced pumping of helium arising from the higher pressure at the pump throat. At this elevated exhausted flux, a value of $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} \approx 7.2$ was achieved, well within the range required by a reactor. The decay time of the helium concentration was similar at all radii within the plasma. The helium profile thus relaxed in a self-similar manner with $\nabla n_{\text{He}}/n_{\text{He}}$ remaining approximately constant. We find that $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ is independent, over the limited range tested, of heating power. Strong gas puffing from the midplane tends to cause $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ to increase by about 40%, but this is mainly because $\tau_{\text{E}}^{\text{th}}$ declines as the electron density increases in the gas puff discharges, where the electron density reaches about 70% of the Greenwald density. We did not try gas puffing from the divertor during these experiments. We note that this has been found recently, on JT-60U [7], to enhance the helium pumping rate.

The results are reproducible even across long periods of plasma operation i.e. under different

vessel conditions. We repeated discharge Pulse No: 46536 in the beginning of the experiments on helium ash simulation as discharge Pulse No: 53652, more than two years later, and obtained the same $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$. This reproducibility is in spite of the apparent difference in ELM behaviour. For Pulse No: 46536 the amplitude of the D_{α} signal was noticeably increased following the He puff and remained so during the helium decay (see Fig.2). For Pulse No: 53652 the ELM amplitude did not change (see Fig.16). This illustrates that some edge perturbation can be tolerated in gas puff experiments, as long as the confinement regime itself is not changed.

4. HELIUM ASH SIMULATION EXPERIMENTS IN ITB DISCHARGES

On JET it was found that impurities accumulate in the plasma core for ITB discharges with large values of β_{N} at high magnetic field (see [17] and references therein) with higher Z impurities exhibiting the strongest peaking. This has been explained by a reduction of the turbulence driven diffusion coefficient, D , in the presence of inward convection, v , where the latter was found to be in agreement with neo-classical predictions. As shown in Fig.3, helium is also subject to this accumulation. The helium density near the axis (shown at $R=3.14$ m) increases and it decreases outside the ITB. While this is interesting in its own right, it does not answer the question what $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ would be with a central source under these conditions. The reduced diffusion, which acts on the gradient, can easily result in strongly peaked density profiles with a central source (see Appendix 1), but then again the same reduction in turbulence will be responsible for the improved energy confinement time, and it is only the ratio of these that we are concerned with. If the peaking is mainly due to inward convection, this may not be very efficient at retaining a central source since it acts on the density (see Appendix 1).

The more structure there is in the internal transport coefficients, the more important it becomes to conduct experiments that address the replacement time with a central source rather than the decay time (see Appendix 1). In addition, ITB discharges on JET rely on a low edge density, and therefore we found that when helium is puffed in the same way as is common practice in ELMy H-Mode discharges, a back transition is triggered due to the increased edge electron density. The helium retention time in ITB discharges was therefore studied using helium neutral beams to provide a central source, to simulate the production of helium ash in a burning core. To this end, one of the two JET beam systems was converted to helium beams with an injection energy of 70 keV. For the discharges in this study, $\approx 60\%$ of the helium is deposited within $r/a \approx 0.4$ i.e. within the region enclosed by core ITBs.

For this paper we chose to study two different ITB scenarios, as illustrated in Fig.4 to Fig.6, at 2.63T/2.2MA and at 3.45T/2.4MA. The latter is a quasi steady state ITB scenario where Lower Hybrid Current drive and Heating (LHCD) was used to slow down the current profile evolution. Both make use of a LHCD prelude phase to create a reversed q -profile at the onset time of the main heating [18]. Since helium beams have a larger shine through, it was necessary to develop scenarios with higher line average density than is normally the case on JET in order to use helium beams. The observed dynamics are very similar, and there are no fundamental differences between our discharges

and more typical ITB discharges. Weak ITBs are formed in the region of the reversed q-profile for all these discharges, and in addition stronger ITBs are formed when the minimum in the q-profile reaches rational values, but these collapse quickly as the q-profile continues to evolve (see Fig.6). At least 14 MW of beam power are required for strong wide ITBs as shown in Fig.3 and were therefore not accessible (see Ref. [19] for a detailed discussion of the requirements for ITB formation on the one hand and access to high performance ITBs on JET on the other).

Quasi steady state helium exhaust is provided by the ArFCP for the whole time, although the reduction of the helium pumping speed becomes noticeable towards the end of the heating phase. In addition, the use of the ArFCP provides effective edge density control by reducing the helium recycling flux, as shown in Fig.4, for up to 5 secs with 2MW of helium beam power, and up to 3 sec with 3MW. The discharges exhibit Type III ELMs throughout the helium beam injection phase. For the two discharges with helium beams in Fig.4, the helium enrichment factor η is 0.58 ± 0.28 without the ArFCP, and 0.42 ± 0.20 with ArFCP. These values demonstrate that the low edge and scrape-off layer density of ITB discharges does not impede helium removal. The discharge in Fig. 4 with ArFCP has the best value for $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}} = 5$ that was obtained at 2.63T/2.2MA in this series of experiments, because of its improved energy confinement as indicated by its value of $\beta_{\text{N}} = 1.4$. The results obtained in a scan of the helium source rate at otherwise constant time evolution in the two ITB scenarios (as shown in Fig.4 and Fig.5, respectively) is shown in Fig.7. The figure shows $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$, the achieved helium enrichment and, for reference, the corresponding values of β_{N} , averaged during the phase when the helium content was in steady-state. The helium source rate was varied by using one, two or three helium sources (Positive Ion Neutral Injectors; PINIs), respectively. The highest helium source rate (2.3×10^{20} /sec) is equivalent to that produced by 130MW of a heating i.e. a total fusion power of 660MW.

5. COMPARISON OF HELIUM RETENTION IN ELMY H-MODE AND ITB DISCHARGES

The lowest $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ that was achieved in ELMY H-Mode discharges is significantly larger than the lowest value in ITB discharges. This is illustrated in Fig.8 where $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ and the helium enrichment factor are plotted against edge plasma density for all discharges, including variation in ICRH and helium beam heating power beyond the range selected for Fig. 7. The figure contains only discharges with optimised strike point configuration for pumping, i.e. corner configuration. ELMY H-Mode discharges in the vertical target configuration have been excluded. ITB discharges were not performed in other than corner configuration. Also shown in Fig.8 is the thermal confinement enhancement factor as given by the IPB(98(y,2)) scaling law [16]. This demonstrates that the low edge confinement in these particular ITB discharges is not offset by an increased core confinement.

In Equation (1) there are three terms that could potentially differ between these regimes, namely the retention time for a central source τ_0 , the retention time for an edge source τ_{edge} , and the effective recycling coefficient R_{eff} . We can not measure τ_0 directly, but we can measure the other

two terms, which we elaborate in the following. Firstly, taking a time $t < t_0$ before the helium puff or before the start of helium beam injection when the total helium content, N_{He} , is in steady-state (see Appendix 2), we can determine the total helium influx under the assumption of toroidal and poloidal symmetry from

$$\tau_{\text{edge}} = \frac{N_{\text{He}}}{\Gamma_{\text{edge}}} \quad (5)$$

$$\Gamma_{\text{edge}} = 2\pi A_p I_{30.4} \left(\frac{S}{XB} \right)_{\text{He}^{+1}, 30.4} \quad (6)$$

Here $I_{30.4}$ is the line of sight integrated intensity, measured by a vacuum UV spectrometer with a line of sight located in the geometric mid plane of the vessel, of the He^{+1} line at $\lambda = 30.4\text{nm}$, absolutely calibrated in $\text{ph}/(\text{m}^2 \text{sr sec})$. A_p is the plasma surface area and S/XB is the measure of ionisations per photon [20] for this spectral line. The coefficient is evaluated for each discharge using atomic data taken from ADAS [21], and turns out to be a weak function of density and temperature, with an average value of about 1.15 for the plasma conditions in the edge of JET.

Active pumping of helium is crucial in order to make this measurement, since without it the helium level would not be in steady-state. In the following we make the assumption that τ_{edge} does not change after the gas puff or during helium beam injection. In the case of the ITB discharges this assumption is probably incorrect, since also the total heating power is increased when the helium beams are injected, see Fig.3 to Fig.5. For the example of the discharge shown in Fig.3, where we can measure τ_{edge} throughout the whole time evolution, we actually find that $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ decreases from an initial value of about ≈ 0.25 (before the formation of the strong barrier) to ≈ 0.10 at the peak of the neutron yield.

During the helium exhaust experiment itself, i.e. for $t > t_0$, we can rewrite R_{eff} in terms of the helium influx, again based on the intensity of the He^{+1} line at 30.4nm but this time after the gas puff or during helium beam injection, and a calculation of the rate at which helium is pumped.

$$R_{\text{eff}} = \frac{\Gamma_{\text{ion}}}{\Gamma_{\text{out}}} = \frac{\Gamma_{\text{edge}}}{\Gamma_{\text{edge}} + \Gamma_{\text{pump}}} \approx \frac{\Gamma_{\text{edge}}}{\Gamma_{\text{edge}} (1 + \epsilon_{\text{wall}}) + \Gamma_{\text{ArFCP}}} \quad (7)$$

The rate Γ_{ArFCP} of helium pumped by the ArFCP can be determined from the sub divertor partial pressure of helium and the pumping speed for helium (see section 2). The fraction of helium pumped by the wall, ϵ_{Wall} , can be estimated from the reference discharges that we performed for each scenario without active pumping, with the assumption $\tau_0/\tau_{\text{E}}^{\text{th}}=1$ and using τ_{edge} from Equation (6). Note that with this approach, ϵ_{Wall} is determined from a measurement of R_{eff} and therefore $(1 - \epsilon_{\text{Wall}}) \neq R_{\text{ret}}$, see Equation (2). One consequence of this is that the result differs for each regime studied, see Table 1. The result is not sensitive to the assumption for $\tau_0/\tau_{\text{E}}^{\text{th}}$ since the decay or replacement time without active pumping is in the range $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}} \approx 20-80 \gg 1$.

We can now combine all measurements in a single plot of $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ against R_{eff} , and this is

shown as Fig. 9. The solid lines represent $1 + \langle \tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \rangle \times R_{\text{eff}}/(1 - R_{\text{eff}})$ where $\langle \tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \rangle$ is the ensemble average for each of the four regimes, see Table 1. All curves are made to pivot around the average $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ for the shot with wall pumping, which is the one with the highest value for R_{eff} for each group. The observed trend for ELMy H-mode and L-mode discharges with active pumping is well reproduced by the curve. Specifically for ELMy H-mode discharges, data with corner configuration and vertical target configuration follow the same trend, the difference in helium exhaust between them being explained by the independent measurement of a different R_{eff} .

The L-Mode discharges (τ_{He}^* here is the time constant for decay following a gas puff) were performed in vertical target configuration. During earlier studies in JET with the Mark I divertor a pair of discharges with optimised pumping, one in H-Mode and one in L-Mode, was performed with $\tau_{\text{E}}(\text{H}) = 1.8 \times \tau_{\text{E}}(\text{L})$ and $\tau_{\text{He}}^*(\text{H}) = 3.8 \times \tau_{\text{He}}^*(\text{L})$ [22,3] which is in qualitative agreement with our result that $\tau_{\text{edge}}(\text{H}) = 1.8 \times \tau_{\text{edge}}(\text{L})$.

For ITB discharges, the trend is less well reproduced, and only discharges with just one helium beam source are close to the trend line. Data with two or more PINIs (not shown in Fig.9) lie well below the trend lines. This is probably due to a reduction of $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ caused by the increase in heating power, rather than an error in the measurement of R_{eff} . If we assume that $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ can be as low as 0.10 (as obtained for the discharge shown in Fig.3) we could explain all data. With this in mind we can conclude that the best ITB discharges have a much lower $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ than the best ELMy H-Mode discharges because of the lower value for $\langle \tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \rangle$ that characterises these regimes.

We can therefore take the next step and plot all measurements against $\langle \tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \rangle \times R_{\text{eff}}/(1 - R_{\text{eff}})$, in Fig. 10. The four curves in this figure represent unity, and three separate curves for different values of $\tau_0/\tau_{\text{E}}^{\text{th}}$ (e.g. 1, 5 and 10). Although all measurements follow the trend reasonably well, over almost two orders of magnitude, it is not possible to conclude what $\tau_0/\tau_{\text{E}}^{\text{th}}$ is for each of the regimes because the scatter is too large for that. Also it is worthwhile recalling that the data for L-Mode and ELMy H-Mode discharges have been obtained from a measurement of the rate of decay of the total helium content and can not be extrapolated to $R_{\text{eff}}=0$ even if the scatter was lower, as explained in Appendix 1.

Finally we note that the agreement between data and prediction using the 0D model in Fig.9 and Fig.10 is only sensitive to errors in the relative calibration between the measurement of the helium content and the pumping rate. Specifically, the absolute calibration of the He^{+1} line at $\lambda = 30.4$ nm line cancels. This can be seen when Equation (1) and Equation (5) to Equation (7) are combined

$$\tau^* = \tau_0 + \tau_{\text{edge}} \frac{\Gamma_{\text{edge}}}{\Gamma_{\text{pump}}} = \tau_0 + \frac{N_{\text{He}, t < t_0}}{\Gamma_{\text{pump}}} \frac{\Gamma_{\text{edge}, t > t_0}}{\Gamma_{\text{edge}, t < t_0}} \quad (8)$$

The error in the helium content measurement is of the order 15% (see also Appendix 2) and the error in the pumping rate is of the same order (see section 2). When R_{eff} and τ_{edge} are considered separately, the calibration of the influx measurement enters, which is only known to about 30%. The uncertainty of a prediction of τ_{He}^* on ITER based on our data thus is dominated by this

measurement because in that case we are only interested in the scaling of τ_{edge} itself.

In addition to the error in the calibration, there is also an uncertainty in the validity of the estimate of the total helium influx from a main chamber, horizontal line of sight, when using Equation (6). The approach we have taken can be justified for helium for two reasons. Firstly, the mean free path of helium atoms of 0.04eV (which corresponds to the vessel temperature) would be $\sim 4\text{cm}$ in a plasma with conditions as they exist on top of the edge pedestal in our experiments. Therefore even the slowest helium atoms are expected to penetrate the scrape-off layer and we do not expect a large contribution to the observed emission to originate from the scrape-off layer. Secondly, it has been seen on JET that the poloidal profile of helium emission extends far outside the region close to the divertor, in contrast to that of other impurities, e.g. carbon [23]. From these emission profiles we have estimated that the influx derived from a line-of-sight in the geometric midplane is within 30% of the true volume integral. If this relationship varied strongly for the discharges in this study, specifically between ELMy H-Mode and ITB discharges, our approach would not have been able to explain the difference in the measured $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ between these regimes.

6. SUMMARY AND OUTLOOK

In JET ELMy H-Modes with Type I ELMs and optimised pumping, the best result we achieved is $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} \approx 7.2$, where τ_{He}^* is the measured helium decay time following gas puffs. The ratio worsens to $\tau_{\text{He}}^*/\tau_{\text{E}} \approx 15$ with poorer pumping in vertical target configuration, because the effective recycling coefficient is increased in this case. The ratio is independent, over the limited range tested, of heating power. The ratio worsens with strong gas puffing principally because $\tau_{\text{E}}^{\text{th}}$ declines as the Greenwald density is approached. The value of τ_{He}^* in L-Mode and ELMy H-Mode is dominated by recycling (i.e. lack of pumping).

In JET ITB discharges with helium beam fuelling, we find $4 < \tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} < 10$, where τ_{He}^* is the measured helium replacement time, with $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}} \approx 5$ obtained for the discharge with the highest value of $\beta_{\text{N}} = 1.4$ within the accessible operational space. These results were obtained in quasi steady state for a duration of up to $5 \times \tau_{\text{He}}^*$. The value of τ_{He}^* in these discharges is still dominated by edge transport and recycling (i.e. lack of pumping) and none of the discharges exhibit a significant increase of f_{He}^* due to the presence of the ITBs. The helium enrichment factor with pumping for all ITB scenarios is in the range $0.40 < \eta < 0.60$ which is mainly a reflection of the fact that helium is pumped, noting that without pumping, η rises up to ≈ 0.8 .

We have shown by independent measurement of R_{eff} that it is possible to explain all observed results for $\tau_{\text{He}}^*/\tau_{\text{E}}^{\text{th}}$ in terms of the differences between the regimes in $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$, where τ_{edge} is the helium replacement time with a source at the edge, in contrast to η_0 which is the replacement time with a central source. The largest value $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \approx 0.92$ is observed in Type I ELMy H-mode discharges, whereas in ITB discharges with Type III ELMs the measurements range between 0.44 and 0.58. This is comparable to L-Mode where the one discharge we studied has $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}} \approx 0.50$. The properties of the scrape-off layer and the sub divertor make a reduction of R_{eff} to the same

value, namely 0.91, possible in both regimes, and therefore $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ is lower in the ITBs that we have studied. However we do not know the contribution to R_{eff} of the two factors that determine it – the return coefficient R_{ret} and the fuelling efficiency, f , for helium, in any discharge.

If R_{eff} can be modelled for ITER, our results should allow a prediction of $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ based on a scaling of $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ between present tokamaks and ITER. Such a scaling is however made difficult because to our knowledge, an independent measurement of R_{eff} and $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ has not been attempted as part of the helium exhaust experiments on any other tokamak and so scaling with machine size would be impossible at present. Also, the errors of R_{eff} and of $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ are quite large, (about 50%), because the measurement relies on the absolute calibration of a vacuum UV spectrometer and the assumption that this measurement is representative for the volume source of helium. Unless inter machine scaling of $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ is a very strong function of machine geometry, such comparison is therefore unlikely to be conclusive.

More experiments on JET with active helium pumping are required to investigate scaling within each operating regime of $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$. The accuracy of such a study is much better (the relative error is about 15%). Within the limited range studied, we have found no clear variation of $f_{\text{edge}}/f_{\text{E}}^{\text{th}}$ for Type I ELMy H-Modes. Even though the two ITB regimes with LH prelude that we studied (strong ITBs at 2.63T/2.2MA and core ITBs at 3.45T/2.4MA with LHCD throughout the main heating phase) are characterised by different $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$, there are too many parameters that differ between these regimes to identify a scaling.

One further question still open is, how $\tau_{\text{He}^*}/\tau_{\text{E}}^{\text{th}}$ would behave for very high values of β_{N} at high magnetic field, i.e. for discharges like the one shown in Fig.3. We have shown that the low edge density in these scenarios is not a problem, i.e. sufficient pumping can be achieved, and our results at high values of β_{N} and low magnetic field indicate that the improvement in $\tau_{\text{E}}^{\text{th}}$ combined with the intrinsically low $\tau_{\text{edge}}/\tau_{\text{E}}^{\text{th}}$ (we have measured values in the range 0.10-0.25 for the discharge shown in Fig.3) of this type of discharge might offset any increase in τ_0 .

APPENDIX 1. ON RETENTION, REPLACEMENT AND DECAY TIME, REFUELLING EFFICIENCY AND PREDICTIONS USING 0-DIMENSIONAL MODELS

In this appendix we address the relationship between the particle retention time, τ^* , in the case of vanishing return flux, and τ^* at finite return flux for particles. We will show that the details of this relationship depend on the type of experiment that was conducted to determine τ^* . Since these results are valid for any species, we omit the index for helium in this section.

In the first type of experiment, the decay of the total particle content, N , is observed once an external source of particles is turned off, and τ^* is identified as the rate of decay as $\tau^*_d = (N - N_{ss}) / (dN/dt)$ where N_{ss} is the steady-state density at $t \rightarrow \infty$. In the second type of experiment, particles are continuously introduced in the plasma centre, and the replacement time is calculated as $\tau^*_r = N/S$ where S is the total particle source rate. While the steady-state solution develops, it is also possible to correct for the retention of particles by calculating $\tau^*_c = N / (S - dN/dt)$. In identical plasmas the

result will be $\tau_{d}^* \neq \tau_{r}^* \neq \tau_{c}^*$ because the density profile shape is necessarily different. The actual values of τ^* also depend on the shape of the radial profile of central and edge source, but this effect will not be discussed in this section.

To demonstrate this difference, we show the results of a simple calculation assuming cylindrical geometry and a plasma radius of 1m in Fig.11 and Fig.12. In this example, ions are introduced in the centre with a source rate S_0 for $t < 0$. The source is then turned off for $t > 0$, and the density is allowed to decay. We include an edge source (recycling flux) $S_{\text{edge}} = R_{\text{ret}} \times G_{\text{out}}$ where R_{ret} is the return coefficient. The recycling flux is modelled by introduction of ions inside the last closed flux surface near the plasma edge. This allows us to ignore all physics relating to the introduction by neutrals. Specifically the fuelling efficiency for this type of edge source is unity, as is the fuelling efficiency for the central source, thus $R_{\text{eff}} = R_{\text{ret}}$ (see Equation (2)).

In the calculation the radial density profile is obtained from particle conservation as

$$\frac{dn}{dt} = -\frac{1}{r} \frac{\partial}{\partial r} \left(r \left(D \frac{\partial n}{\partial r} - vn \right) \right) + s - \frac{n}{\tau_{\parallel}} \quad (9)$$

where a time constant for parallel losses, τ_{\parallel} , is introduced in the scrape-off layer. This ansatz for the particle flux represents a diffusive term plus a convective term i.e. a flux driven by gradients in other plasma quantities but the density itself.

It can be seen in Fig. 12 that the calculated $\tau_{0,r} = N/S_0$, once steady-state has been reached, is always larger than $\tau_{0,d} = N/(dN/dt)$ noting that the decay is at first non-exponential while the density profile shape relaxes (Fig.11). It is interesting to note that the time constant for decay starts off with a value equal to the steady-state result. Experimentally this will be very difficult to determine, because the time window when this is the case is very short and too few data points are available to analyse. Fig. 11 also illustrates that it is necessary to wait until steady-state has been reached, since considering $\tau_{c}^* = N/(S-dN/dt)$ results in a time dependent result. The overshoot in τ_{c}^* occurs as long as the density profile is not yet in steady-state because the particle flux through all flux surfaces, including the last closed flux surface, is still increasing and is not yet equal to the central source rate. Using Equation (1) and Equation (2) we can calculate, as a consistency check, the actual refuelling efficiency, f , from the solutions obtained by our calculations as

$$f = \frac{1 - R_{\text{ret}}}{R_{\text{ret}}} \frac{\tau^* - \tau_0}{\tau_{\text{edge}}} \quad (10)$$

In Fig.12, we also show the result of this equation using the results for τ^* from the analysis of steady-state and decay. When the steady-state replacement is used we obtain $f=1$ independent of R_{ret} as expected. When the decay time is used, τ can become larger than unity, and will depend on R_{ret} . The reason for this behaviour is that the radial profile in the steady-state case is a linear combination of two functions, the solution with central source only and the solution with edge source only. A solution during the decay phase, on the other hand, is not. Therefore a linear ansatz fails.

For high values of R_{ret} the difference between the two results for τ^* is reduced (Fig.12). Most of the changes in any definition of τ^* occur for $R_{\text{ret}} > 0.8$, although this particular value reflects the particular ratio of $\tau_0/\tau_{\text{edge}} \approx 3$, which in turn is determined by the profiles of D and v that we have chosen, in this example.

To study the sensitivity to variations in core transport coefficients, we have performed the same calculation with the transport terms modified in the centre by an additional inward drift and with a reduced diffusion coefficient. The results are shown in Fig.13 and Fig.14. These two ‘‘enhanced core confinement’’ cases have been chosen to have the same solution in a source free region, which is given by

$$\frac{1}{n} \frac{\partial n}{\partial r} = \frac{v}{D} \quad (11)$$

These two calculations illustrate that the two transport coefficients have a different effect on the resulting retention time in the presence of a central source. The reduced diffusion, which acts on the gradient, can result in strongly peaked density profiles, accompanied by a significant increase in τ^* (Fig. 14). If the same peaking without a central source is mainly due to inward convection, this is not very efficient at retaining a central source since it acts on the density, and τ^* is not strongly modified, whichever definition is chosen. The second aspect this calculation illustrates is that the effect of reduced central diffusion on τ^* is more pronounced for the replacement time than for the decay time. As a numerical example, for $R_{\text{ret}} = 0.8$, the replacement time increases from 0.97secs to 1.01 secs in the case with increased inward convection and to 1.42secs with reduced diffusion. The decay time increases from 0.87secs to 0.90secs and 1.04secs, respectively. A third point worth noting is that the failure of the linear ansatz for the refuelling efficiency is larger in the case of reduced central diffusion than in the other two cases.

In summary, the steady-state replacement time is always longer than the decay time for the same plasma conditions. Only the true steady-state replacement time can be used to predict results at one specific value of R_{ret} from those at a different value of R_{ret} using a 0-dimensional ansatz. To do this based on experimental data, it is necessary to estimate the replacement time for an edge source, τ_{edge} . Reduced central diffusion is more effective at retaining particles than increased inward convection for the same ratio of v/D in the absence of a central source, with the effect more pronounced for the steady-state replacement time.

APPENDIX 2. ON MEASUREMENT OF THE DECAY TIME AND REPLACEMENT TIME

In this appendix we discuss the assumptions made and the statistical and systematic errors of the techniques adopted in this paper to measure the decay time and the replacement time of helium. Two parameters control the accuracy of a decay time analysis, the duration during which the decay is observed and the magnitude, ΔN , of the puff. In Fig.15 this is illustrated for two cases: one where the background level, N_0 , is known, and one where the background level itself has to be extracted

from the experiment. For the first case we need to perform a two parameter fit, for the second case a three parameter fit, to the measurement. The contours of constant error in Fig.15 have been derived from generating exponential decay data, and then analysing them. Time resolution and random noise have been chosen to be representative of the JET helium diagnostic. If the background is known, a 20% accuracy for τ_d is achieved after about 2/3 of a decay time (10% after one decay time). If the background needs to be extracted as well, 2.5 decay times have to be included, and observation during five decay times is required to achieve 10% accuracy. Since the discharge duration is limited by technical constraints, and the puff should be applied only after steady-state conditions have been achieved, it turns out on JET that it is not possible to observe the decay for long enough to perform a three parameter fit. Therefore it is necessary to make an assumption about the helium background.

The residual helium in the experiment is due to wall storage from previous discharges [24]. In the example shown in Fig.16 we can see that the helium in the plasma builds up to a steady-state level following the application of NBI heating. The heat and particle flux to the divertor and wall surfaces releases the stored helium, and the residual level is established as equilibrium between this source and the pumping by the ArFCP. We have performed one discharge without helium puff in the ELMy H-mode series Pulse No: 46514-46541, and one without helium beams in the ITB series Pulse No: 53885-53932, where we have seen no further increase or indeed any reduction of the helium influx or content during 8 seconds of constant heating power. Even so, the helium content may or may not decay to the initial residual level after a puff. Firstly, the pumping speed of the ArFCP deteriorates as deuterium and helium is trapped (see section 2) which slows down the rate of decay, but also changes the equilibrium helium content for a constant rate of release from the wall. Secondly, an increase of the amount of helium stored in the wall might result from the helium puff and from helium escaping from the plasma following the puff. Quantification of both of these effects is not possible by measurement, and thus requires detailed modelling, which is probably not warranted since the decay time is not actually the helium retention time, as discussed in Appendix 1.

A pragmatic solution, therefore, is to analyse the decay time under the assumption that the helium content will return to the residual level, but to limit the number of data to cover a floating 2 sec time window. Alternatively, we can perform the same analysis setting $N_0 = 0$. Both methods result in a time dependent decay time constant, as illustrated in Fig. 16. At this point the choice between the two assumptions on N_0 becomes a matter of taste. It is however important in the analysis shown in section 5 to be consistent. If a finite value for N_0 is used, then influx and pumping rate used in Equation (7) need to be corrected for the residual level as well. To simplify this analysis we have decided in this paper to set $N_0=0$.

For consistency, we make the same assumption ($N_0=0$) also in the calculation of the helium replacement time in experiments with a central source. In addition, it is necessary to correct for the time evolution of the helium content, i.e. to calculate $N/(S-dN/dt)$, since it is never truly steady-state, mainly because the current profile and hence the background plasma are continuously evolving

in these ITB discharges but also because the pumping speed of the ArFCP decreases with time. To avoid the initial overshoot that was discussed in Appendix 1 we wait for two replacement times before using the data point in any further analysis. An example showing four possible definitions for the replacement time is shown in Fig.17. This particular discharge does not exhibit the overshoot, whereas the discharge shown in Fig.7 does.

In contrast to the derivation of the decay time, measurement of the replacement time requires an absolute measurement of helium content as well as knowledge of the central source. The helium density is derived from charge-exchange spectroscopy data by a self-consistent beam attenuation calculation [25]. The factor dominating the systematic error is the knowledge of the cross sections for beam attenuation and line emission. It would be realistic to assume that the overall accuracy can not be better than 20%. However we note that following helium gas puffs in discharges without active pumping we find an increase of the derived helium content in the plasma that agrees with the amount puffed to within 5% which we thus take to be the error of this measurement. The shine through of the helium beams calculated for the ITB discharges studied in this paper is about 20%, so that 80% is deposited in the plasma. The errors of this calculation depend mainly on the line integral density and the atomic data for beam attenuation. The error bar for this term is asymmetric. At best, all helium could be deposited in the plasma which means there is a lower limit on the error for τ^* of 20% but this is too pessimistic. In combination with the error of the helium density measurement, we believe that the derived helium replacement time is accurate to about 15% i.e. the error is comparable to the error of the decay time measurements.

ACKNOWLEDGEMENTS

This work was performed partially within the framework of the JET Joint Undertaking and partially under the European Fusion Development Agreement. It was funded in part by EURATOM, the UK Department of Trade and Industry, and the US Department of Energy under Contract No. DE-AC05-00OR22725.

This paper is an extended version of a contribution to the 29th EPS conference on Plasma Physics and Controlled Fusion held in Montreux, Switzerland in June 2002. It includes material from a paper by D Stork et al. from the 26th EPS conference on Controlled Fusion and Plasma Physics held in Maastricht, The Netherlands in June 1999, and a paper by K H Finken et al. from the 28th EPS conference on Controlled Fusion and Plasma Physics held in Madeira, Portugal in June 2001.

REFERENCES

- [1]. D Reiter, G Wolf and H Kever, Nucl. Fusion **30**, 2141 (1990)
- [2]. See pages 2420-2421 in "ITER Physics Basis", Nucl. Fusion **39** (1999)
- [3]. J Hogan, J. Nucl. Mater. **241-243**, 68 (1997)
- [4]. M R Wade *et al*, Phys. Plasmas **2**, 2357 (1995)
- [5]. A Sakasai *et al*, J. Nucl. Mater. **220-222**, 405 (1995)
- [6]. A Sakasai *et al*, Proc. 17th International Atomic Energy Agency conference on Fusion Energy, 1998, Yokohama, Japan
- [7]. A Sakasai *et al*, Proc. 18th International Atomic Energy Conference on Fusion Energy, 2000, Sorrento, Italy
- [8]. D L Hillis *et al*, Phys. Rev. Letters **65**, 2382 (1990)
- [9]. H Takenaga *et al*, Nucl. Fusion **39**, 1917 (1999)
- [10]. A S Kukushkin *et al*, Nuclear Fusion **42** (2002) 187
- [11]. The JET Team (prepared by R D Monk), Nucl. Fusion **11Y** (1999) p. 1751
- [12]. J Bucalossi *et al*, Proc. 28th EPS Conf. on Contr. Fusion and Plasma Phys., Funchal, Portugal, 2001, ECA **25A** (2001), 1629 [13] M Groth *et al*, Nucl. Fusion **42**, 591 (2002)
- [14]. P D Morgan, Proc. 6th International Conf. on Advanced Diagnostics for Magnetic and Inertial Fusion, Varenna, Italy 2001
- [15]. G Janeschitz *et al*, Proc. 16th International Atomic Energy Agency Conference on Fusion Energy, 1996, Montreal, Canada, IAEA-CN-64/F2, p. 759
- [16]. see page 2175 in "ITER Physics Basis", Nucl. Fusion **39** (1999)
- [17]. R Dux, C Giroud and K-D Zastrow, "Impurity Transport in Internal Transport Barrier Discharges on JET", submitted to Nuclear Fusion
- [18]. J Mailloux *et al*, Phys. Plasmas **9**, 2156 (2002)
- [19]. C D Challis *et al*, Plasma Phys. Contr. Fusion **44**, 1031 (2002)
- [20]. K Behringer, H P Summers, B Denne, M Forrest and M Stamp, Plasma Physics Contr. Fusion **31**, (1989) 2059
- [21]. ADAS, Atomic Data and Analysis Structure, <http://adas.phys.strath.ac.uk>
- [22]. M von Hellermann *et al*, Proc. 22nd EPS Conf. On Contr. Fusion and Plasma Phys., Bournemouth, UK, 1995, ECA **19C** (1995), II-009
- [23]. K D Lawon *et al*, Proc. 29th EPS Conf. on Plasma Phys and Contr. Fusion, Montreux, Switzerland, 2002, ECA **26B** (2002), p. 2-040
- [24]. K H Finken *et al*, J. Nucl. Mater. **176-177**, 816 (1990)
- [25]. M G von Hellermann, in *Atomic and Plasma-Material Interaction Processes in Controlled Thermonuclear Fusion*, ed R K Janev and H W Darwin (Amsterdam, Elsevier 1993).

	ϵ_{Wall}	$\langle \tau_{\text{edge}} / \tau_{\text{E}}^{\text{th}} \rangle$
L-Mode (1.94T/1.9MA)	0.011	0.50
ELMy H-Mode (1.94T/1.9MA)	0.017	0.92
ITB at (2.63T/2.2MA)	0.015	0.44
ITB at (3.45T/2.4MA).	0.024	0.58

Table 1: Constants quantifying the helium exhaust for the four regimes studied in this paper. The solid lines in Fig.9 and the x-axis for the data in Fig.10 are calculated using these coefficients.

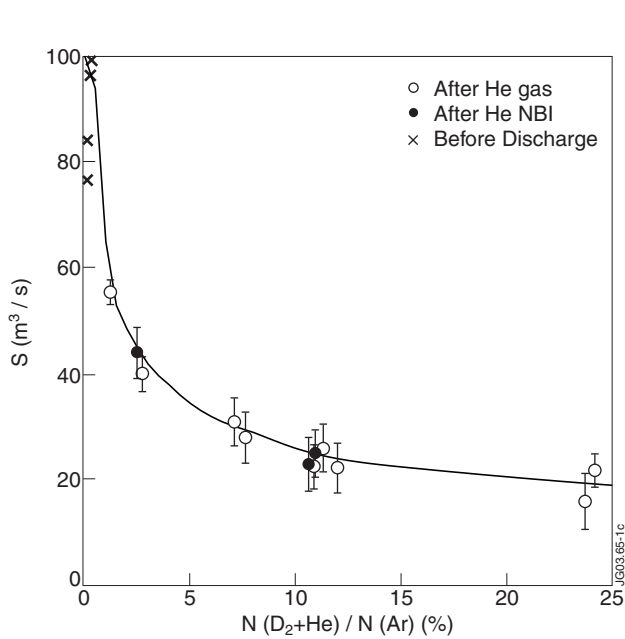


Figure 1: Pumping speed for the argon frosted divertor cryo-pump on the vessel, as a function of the saturation of the argon frost layer with deuterium and helium. The pumping speed is measured using helium gas puffs into the vessel after the discharge. $N(D_2+He)$ is calculated from a measurement of the sub divertor pressures for helium and deuterium and the pumping speed of the divertor cryo-pump on the sub divertor region. $N(Ar)$ is the amount of argon applied in the most recent frost.

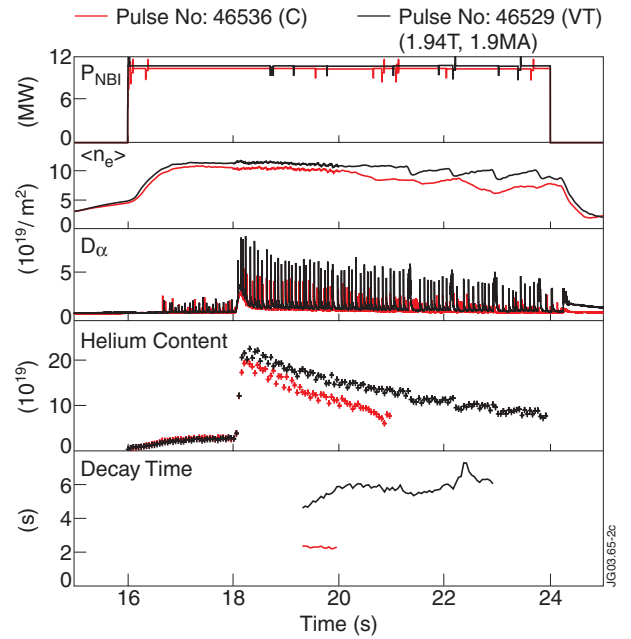


Figure 2: Comparison of the decay of the helium content for two ELMy H-Mode discharges (1.94T, 1.9MA) at constant input power for two different strike point configurations. The discharge with the strike points in the corner (in grey) exhibits a faster helium removal rate than the one with the strike points on the vertical target (in black).

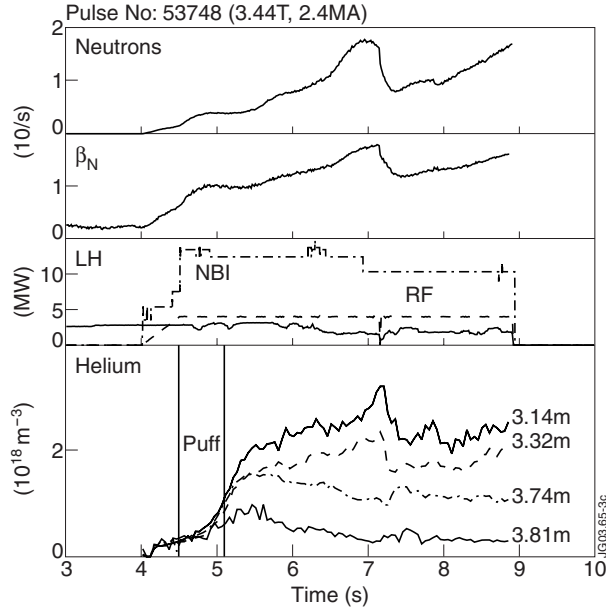


Figure 3: Helium is slowly introduced by gas puff into a discharge with reversed q profile prior to ITB formation. Helium is not pumped (but there is good potential for pumping, i.e. $\eta=0.79\pm 0.30$). The observed changes in the helium density profile reveal changes in v/D . ITBs are first formed on the reversed q profile region ($t=5.5$ sec). The first strong ITB is located at $q=3$ ($t=6.5$ sec). To avoid the \leq limit, the power is stepped down ($t=6.9$ sec), the subsequent loss of the ITB results in a redistribution of helium. The second strong ITB is located at $q=2$ ($t=8.1$ sec).

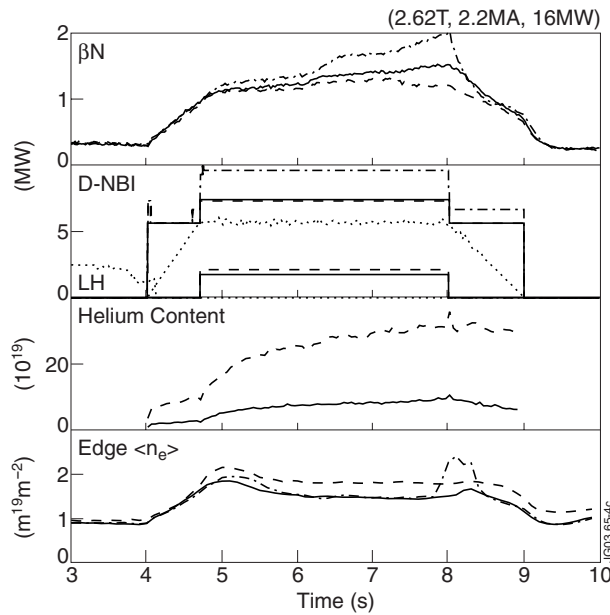


Figure 4: Comparison of three ITB discharges with identical current profile evolution and heating power (LH and RF heating are only shown once for clarity; dotted lines). With 8MW of D beams and ≈ 2 MW of helium beams, but without helium pumping (dashed lines), the edge density is increased compared to the D only reference pulse (dash-dotted lines). With helium pumping (solid lines), the edge density is controlled, and a reduction of the helium core concentration from 20% to 6% is achieved. The discharge does not reach the same value of β_N as the reference pulse, because of the larger shine through of helium beams compared to deuterium beams.

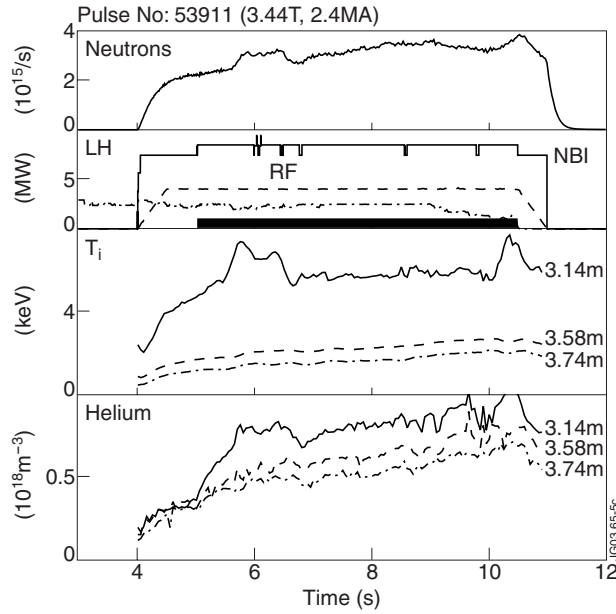


Figure 5: ITB discharge with identical current profile evolution and heating power as the discharge shown in Fig. 3 up to $t=4.8$ sec. With 1 MW of helium beams (black bar), the edge density (not shown) is controlled for 5 sec, while the pumping speed for helium decreases during this time as indicated by the slight increase of the helium density in the core. The formation of the $q=3$ ITB at $t=5.6$ sec and the $q=2$ ITB at $t=10.0$ sec and their collapse can be clearly observed in the neutron yield, central ion temperature and helium density profile. In between these events, ITBs form and collapse rapidly in the region of the plasma where the q -profile is reversed, which is the reason for the observed fluctuations on neutron yield, central ion temperature and to some extent central helium content. Radial profiles for this discharge are shown in Fig. 6.

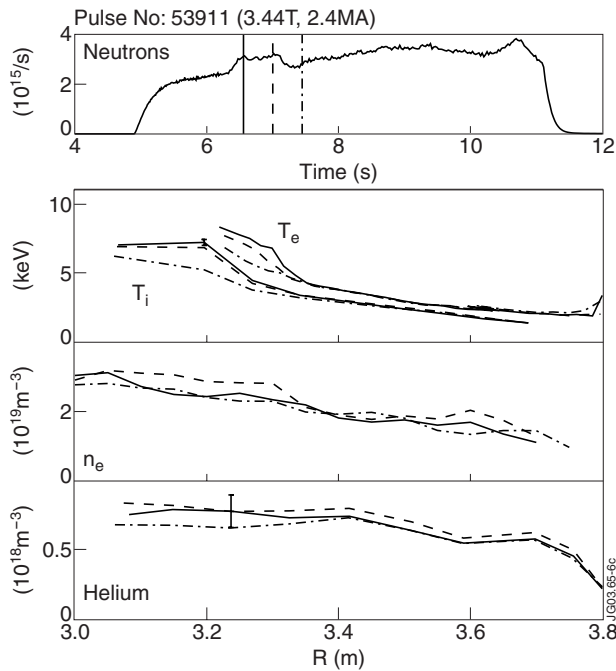


Figure 6: Radial profiles of electron and ion temperature, as well as electron and helium density, for the discharge shown in Fig. 5. The ITB is located in the core and does not expand to large radii. The panel at the top is reproduced from Fig. 5 to indicate the time of the profiles relative to the time evolution of the discharge.

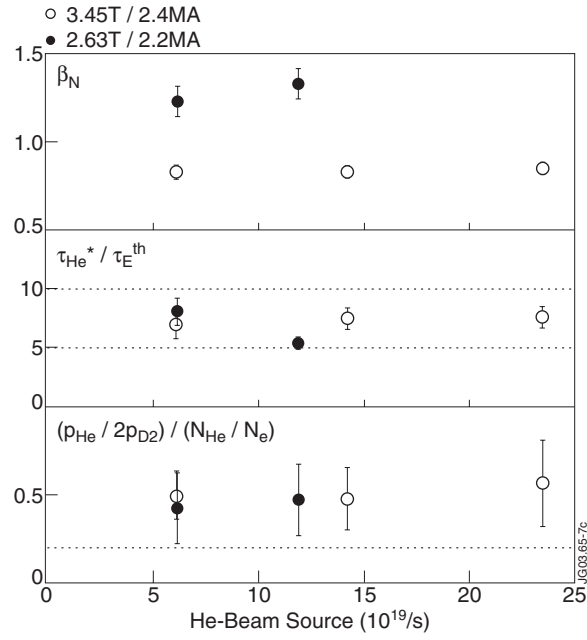


Figure 7: Overview of results, averaged during the phase in each discharge when the helium content is in steady-state, for τ_{He^*}/τ_E^{th} and helium enrichment factor η with helium pumping for two reversed q profile scenarios. The best value for τ_{He^*}/τ_E^{th} was obtained for the 2.63T/2.2MA discharge shown in Fig.3, because of its improved energy confinement as indicated by its value of $\beta_N=1.4$. The heating power to form an ITB with the values of β_N at 3.45T/2.4MA as in Fig.3 while retaining edge density control was not available due to the conversion of half the beams to helium, and only core ITBs were obtained as shown in Fig.5 and Fig.6.

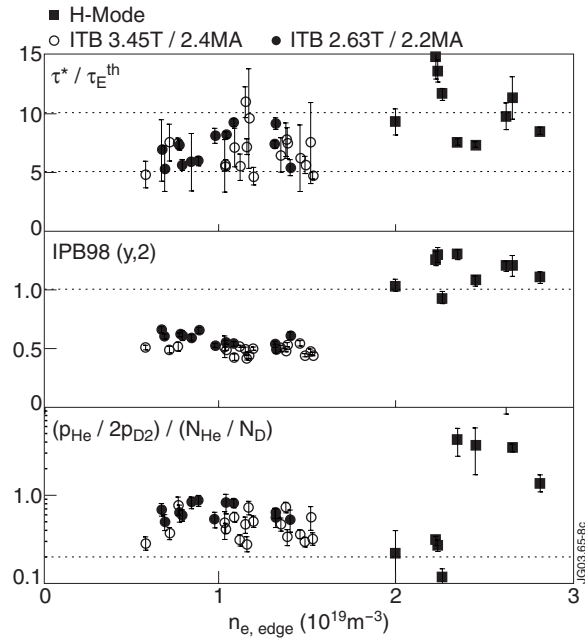


Figure 8: Overview of results for τ_{He^*}/τ_E^{th} and helium enrichment factor as function of edge density. Also shown is the confinement enhancement factor. Up to three data points are taken in each discharge, and results averaged during 0.5secs. The error bar reflects the variation of the data within each 0.5sec interval. All results are obtained with plasma configuration optimised for pumping, i.e. strike points in the corner on the horizontal target of the Mark II-GB divertor, but at varying pumping speed due to variations in the saturation of the ArFCP.

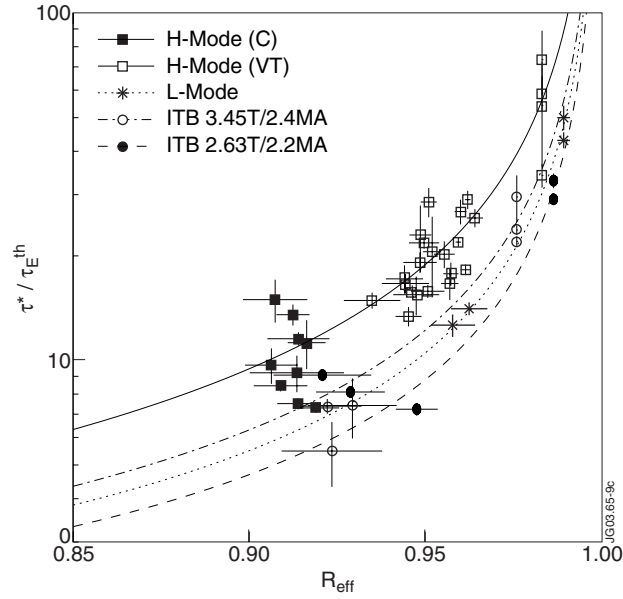


Figure 9: Overview of results for τ_{He}^*/τ_E^{th} plotted against the independent estimate of effective recycling coefficient as obtained from a measurement of the influx and a calculation of the pumping rate, including removal by the ArFCP and by wall pumping. The curves represent $1 + \langle \tau_{edge} / \tau_E^{th} \rangle \times R_{eff} / (1 - R_{eff})$ using the average of the measured $\tau_{edge} / \tau_E^{th}$ for each of the regimes, see Table 1. H-Mode data follow the same curve for corner (C) and vertical target (VT) configuration. Only ITB discharges with one helium PINI are included in this figure. Data from discharges with two or more helium PINIs all lie significantly below the corresponding curve and are not shown, as explained in the text.

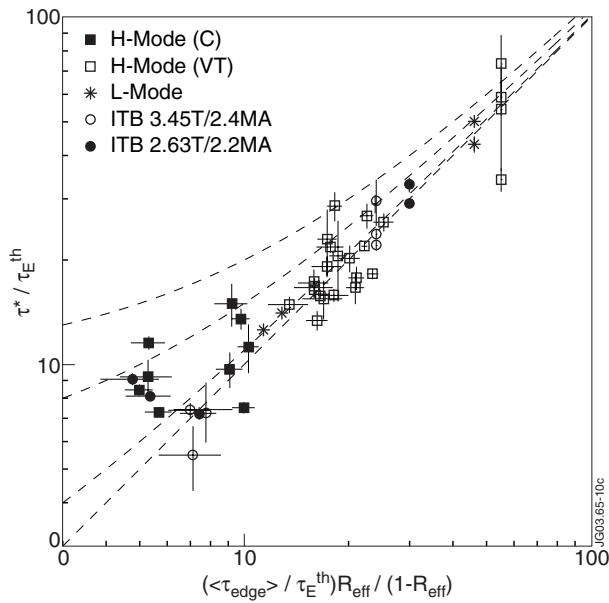


Figure 10: As Fig. 8 except the x-axis is the product of the ensemble average $\langle \tau_{edge} / \tau_E^{th} \rangle$ and $R_{eff} / (1 - R_{eff})$ instead of R_{eff} . Also shown is one curve to represent unity as well as three curves with an offset due to three assumptions, $\tau_0 / \tau_E^{th} = 1, 5$ and 10 respectively.

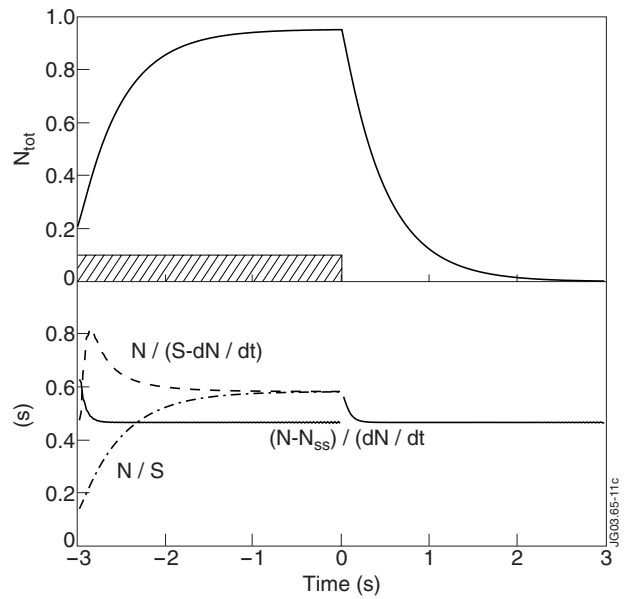


Figure 11: The upper half of the figure shows the calculated time evolution of the total number of particles, N_{tot} , in a cylindrical plasma of 1 m radius (with transport coefficients D and v as given in Fig.12 and $R_{ret} = 0.5$) with a phase of central deposition as indicated by the shaded area ($t < 0$) followed by a phase of decay ($t > 0$). The lower figure shows the time evolution of various characteristic time constants that could be derived from N_{tot} in an experiment, as explained in the text.

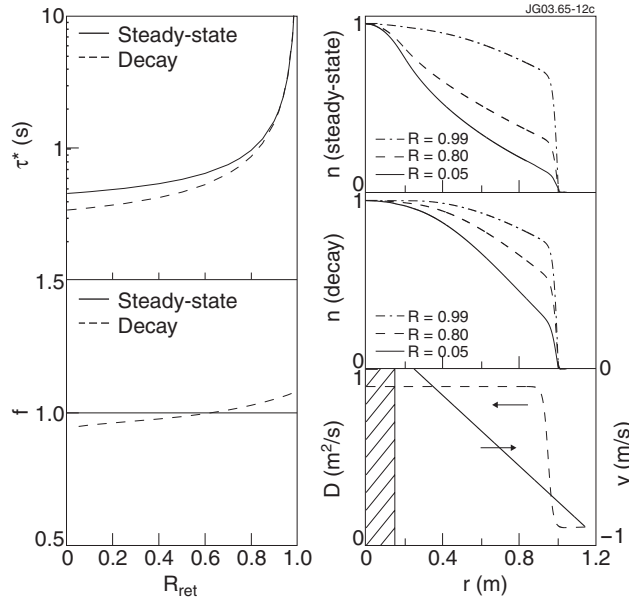


Figure 12: The right half of the figure shows (from top to bottom) the profile shape adopted in steady-state and during exponential decay for various values of particle return coefficient, R_{rep} and the transport coefficients used in the model calculation. The central source is located in the shaded area. The top left half of the figure shows two possible results for τ^* , the replacement time in steady-state and the time constant for exponential decay, as function of R_{rep} . A fuelling efficiency, f , is derived from both results for τ^* and is shown in the bottom left half of the figure using two different expressions. The result is the expected value of unity only for the case of the steady-state replacement time.

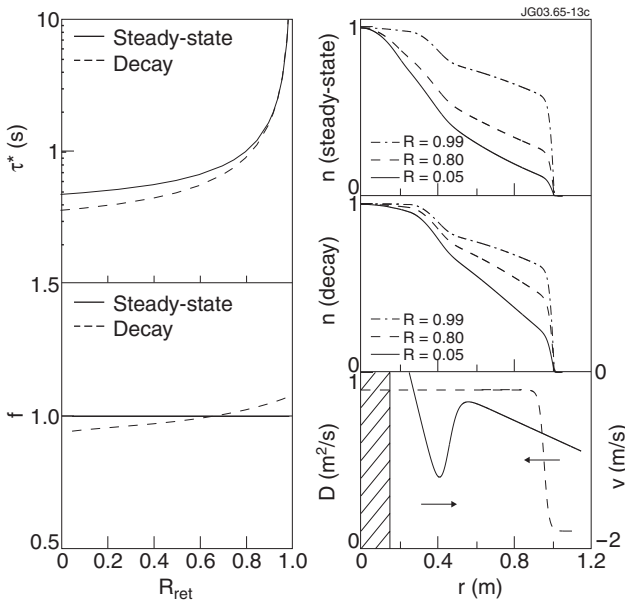


Figure 13: As Fig.12 except a region of increased convective transport is introduced for $r < 0.5$ m. The profile of v is chosen to give the same steady-state profile shape without central source as the case illustrated in Fig.14 which has reduced diffusive transport instead.

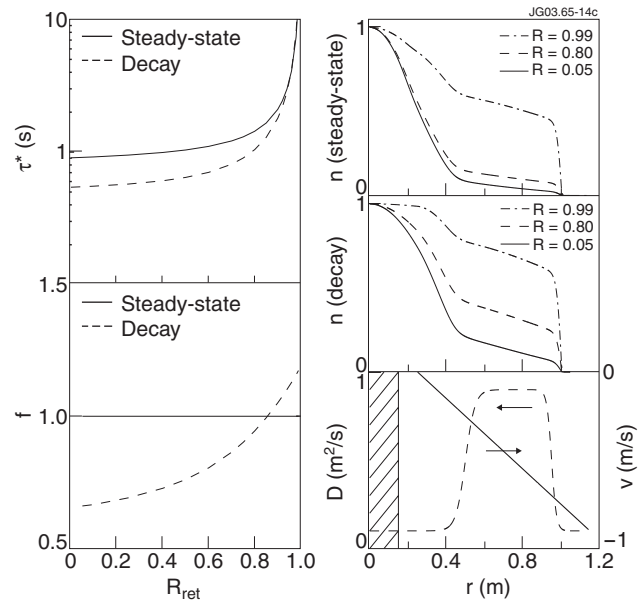


Figure 14: As Fig.12 except a region of reduced diffusive transport is introduced for $r < 0.5$ m. The profile of D is chosen to give the same steady-state profile shape without a central source as the case illustrated in Fig.13 which has increased convective transport instead.

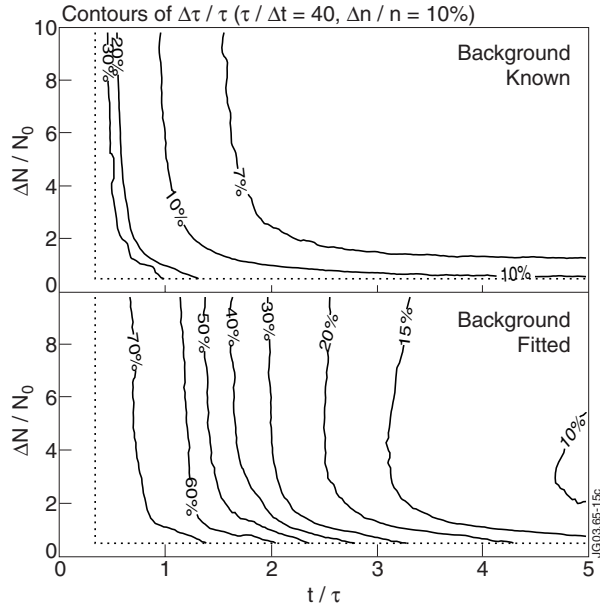


Figure 15: Contours of errors in derived decay time, t , as function of observed duration of decay, t/τ , and amplitude over background, $\Delta N/N_0$. The time resolution Dt of the signal in this example provides 40 time points per decay time with a 10% accuracy per data point. This corresponds to the actual JET experiments for $\tau=2$ sec. When the background level is known, it is sufficient to observe the decay for 2/3 of a decay time to achieve 20% accuracy, provided $\Delta N/N_0 > 2$. If the background level needs to be fitted, almost three decay times need to be observed.

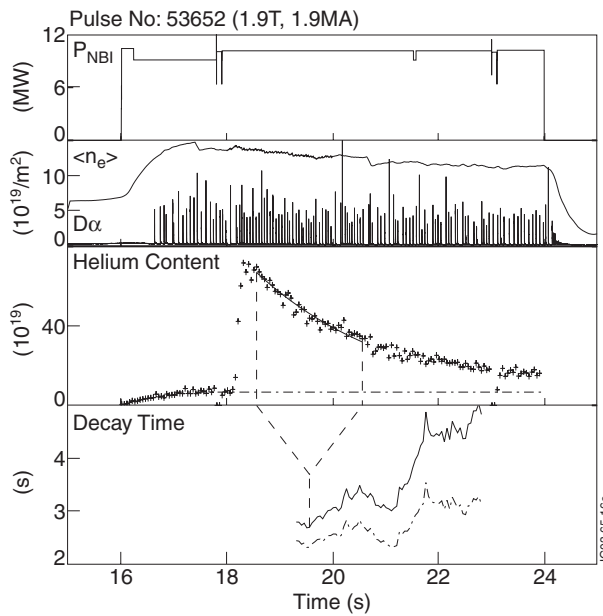


Figure 16: Analysis of exponential decay of helium content for JET-Pulse No: 53652 following a gas puff at 18.0 secs. The residual helium content before the puff builds up in response to the application of NBI heating, and is due to wall storage of helium. The decay time is analysed in a floating time window of two sec duration (as indicated by the dashed lines). When it is assumed that the helium level returns to the residual level (dash dotted lines in the bottom two figures), the derived decay time rises from 2.54 ± 0.15 sec to 3.07 ± 0.22 sec. If instead the analysis is performed ignoring the residual level (solid line), the derived decay time rises from 2.82 ± 0.15 sec to 4.71 ± 0.22 sec. The latter method is chosen in the analysis in this paper.

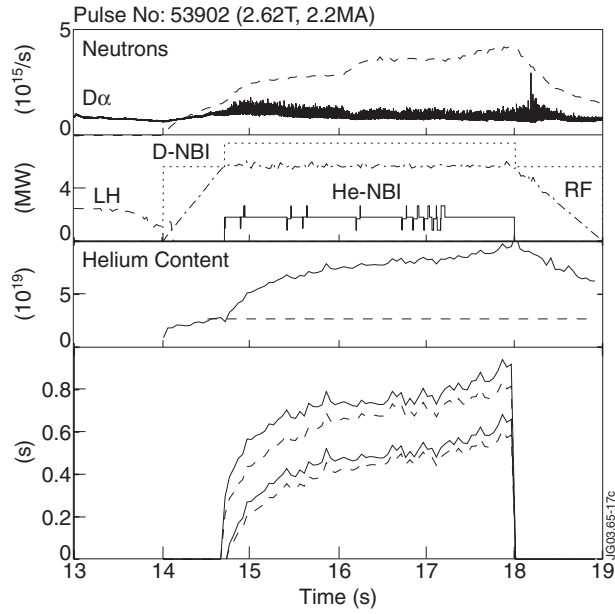


Figure 17: Analysis of helium replacement time for JET-Pulse No: 53902. The dashed lines in the bottom part of the figure correspond to the use the source S_0 and the solid lines to the use of $S_0 - dN/dt$ in the calculation. This correction is necessary because of the underlying evolution of the background plasma and because the pumping speed of the ArFCP is not constant for the whole duration of the discharge. If the residual helium level is subtracted to calculate an incremental helium replacement time, the result is about 0.45secs (lower two curves). Without subtraction, which is the method used in this paper, we obtain about 0.75secs (upper two curves).