

B. Bieg

Accuracy of the Approximate Expressions for Pure Cotton-Mouton Effect from JET Real-Time Far Infrared Polarimeter

(14th April – 17th April 2015)
Frascati, Italy



This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

"This document is intended for publication in the open literature. It is made available on the clear understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail Publications.Officer@euro-fusion.org".

"Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail Publications.Officer@euro-fusion.org".

The contents of this preprint and all other EUROfusion Preprints, Reports and Conference Papers are available to view online free at <http://www.euro-fusionscipub.org>. This site has full search facilities and e-mail alert options. In the JET specific papers the diagrams contained within the PDFs on this site are hyperlinked.

Accuracy of the approximate expressions for pure Cotton-Mouton effect from JET Real-Time Far Infrared Polarimeter

Bohdan Bieg¹

¹ Maritime University of Szczecin, Waly Chrobrego 1-2, 70-500 Szczecin, Poland

E-mail: b.bieg@am.szczecin.pl

Alexandru Boboc²

² CCFE, Culham Science Centre, Abingdon, OX14 3DB, UK

and JET Contributors^{3,4}

³ EUROfusion Consortium, JET, Culham Science Centre, Abingdon, OX14 3DB, UK

⁴ See the Appendix of F. Romanelli et al., *Proceedings of the 25th IAEA Fusion Energy Conference 2014, Saint Petersburg, Russia*

The JET Far-Infrared (FIR) polarimeter is a laser based instrument used for determining the poloidal magnetic field via the Faraday rotation angle measurements and more recently, for determining the line-integrated electron plasma density (LID) via the Cotton-Mouton angle measurements. However, at high plasma current and plasma density the Cotton-Mouton effect combines nonlinearly with the Faraday effect, hampering an accurate determination. There have been several investigations in the last decade dedicated to the subject, but all were carried out for different plasma regimes and conditions. We take a different approach, where different approximations for estimating the line-integrated plasma density by polarimetry are analysed in a wide variety of conditions, representative of the JET operating domain, focusing in particular on pulses with high plasma current, high density and high magnetic field. This new set of data will be compared with the line-integrated measurements obtained by other means, such as interferometry and High Resolution Thomson Scattering. A complete sensitivity study of the various formulations for LID from polarimetry will be performed to analyse the potential of these formulations for complementing the interferometry measurements with the ultimate goal of providing fringe-jump free LID measurements on JET during future experimental campaigns.

*First EPs Conference on Plasma Diagnostics - 1st ECPD
14-17 April 2015,
Villa Mondragone, Frascati (Rome) Italy*

¹Speaker

1. Introduction

The electron density is one of the main plasma parameters, crucial of any fusion devices such as the Tokamak and the Stellarator. The standard diagnostic for the electron line-integrated density (LID) measurement at JET is Far-Infrared (FIR) interferometer, method integrated in the real-time control systems and proved for many years. Despite the reliability of interferometry, there are cases when LID measurement is corrupted or even lost due various effects such as mechanical vibrations, refraction of FIR beams, or when the rate of change of the plasma density is faster than the interferometry sampling rate due to turbulent effects such as Edge Localised Modes, disruptions, impurity seeding or when pellets are injected into the plasma for example. The installation of JET's ITER-like metallic wall has caused new types of diagnostic issues, that heavily affect many diagnostic systems including interferometry, such as tungsten impurity influx during plasma pulses. The loss of the FIR signal generates the so called fringe jumps in the measured LID, each leading to an uncertainty in the measured line-integrated density value of $1.143 \times 10^{-19} \text{m}^{-2}$. In the case of JET, a backup measurement was proposed, based on LID evaluation using polarimetric the Cotton-Mouton effect (CM) [1]. This effect consists in the change of the electromagnetic beam ellipticity and takes place when the beam passes through birefringent medium with transverse magnetic field, like magnetized plasma. In the first approximation, assuming that the toroidal field B_t is the only one component of the magnetic field vector, the total change in the ellipticity angle χ , characterizing the beam ellipticity (defined in literature as $\varepsilon = \tan(\chi)$), is proportional to the line-integrated density n_e of the plasma as follows:

$$\Delta\chi = \frac{1}{2} C_1 \lambda^3 \cdot \int n_e B_t^2 dz, \quad (1)$$

where $C_1 = 2.4565 \cdot 10^{-11} \text{rad/mT}^2$ and λ is the electromagnetic beam wavelength.

For the JET vertical lines of sight B_t is nearly constant along the path and the line-integrated and the line-integrated plasma density could be very simply determined from the change in the value of the ellipticity angle alone:

$$\text{LID}_\chi = \int n_e dz = \frac{2\Delta\chi}{C_1 \lambda^3 B_t^2}. \quad (2)$$

Unfortunately the presence of the poloidal magnetic field, with components of the magnetic field perpendicular and parallel to the beam, leads to a more complex evolution of the beam polarization state. The small perpendicular component B_r slightly modify the change in the ellipticity angle caused by strong toroidal field B_z . The magnetic field component B_z , parallel to the beam propagation direction, brings on the polarization plane rotation (the Faraday effect), measured as a change in the value of the polarization angle ψ . Additionally, there is nonlinear mutual coupling of both polarization angles – the rate of polarization angle rotation is affected by the value of the ellipticity angle χ , and vice versa. The evolution of the polarization state (ψ, χ) of the laser beam propagating through the magnetized plasma without dissipation, in cold plasma approximation can be described by the set of two differential equations [2]:

$$\begin{cases} \frac{d\psi}{dz} = \frac{1}{2}\Omega_3 - \frac{1}{2}(\Omega_1 \cos 2\psi + \Omega_2 \sin 2\psi) \tan 2\chi \\ \frac{d\chi}{dz} = \frac{1}{2}(\Omega_1 \sin 2\psi - \Omega_2 \cos 2\psi) \end{cases} \quad (3)$$

where the terms $\Omega_1 = 2.4565 \cdot 10^{-11} \lambda^3 n_e \cdot (B_t^2 - B_r^2)$ and $\Omega_2 = 2.4565 \cdot 10^{-11} \lambda^3 n_e \cdot 2B_t B_r$ account for the Cotton-Mouton effect, while $\Omega_3 = 5.2624 \cdot 10^{-13} \lambda^2 n_e \cdot B_z$ accounts for the Faraday rotation effect [5]. From the equations (3) it is clear that equations (1) and (2) are accurate only in the case when along the whole path the polarization angle is equal to the initial value $\psi_0 = \pi/4$ and when constant B_t is the only one magnetic field component – so $\Omega_2 = \Omega_3 = 0$. In current JET plasma conditions none of these conditions is fulfilled: the Faraday rotation angle $\Delta\psi$ sometimes exceeds 1.2 radians (or 70 degrees), toroidal magnetic field component B_t varies along the path and $|\Omega_3| > \Omega_1 \gg \Omega_2$.

In order to estimate the LID value from the polarimetry several approximations have been proposed, consist in obtaining from polarimetry data (ψ, χ) such a quantity W_1 that is defined as follows:

$$\text{LID} = \int n_e dz = \frac{W_1}{C_1 \lambda^3 B_t^2} \quad (4)$$

Here we present the statistical analysis of five different models proposed in the literature, using measurements from various plasma scenarios representative of the JET operating domain focusing in particular on pulses with high plasma current, high density and high magnetic field. All analysed polarimetry data were obtained using new calibration method, introduced to JET polarimetry system in 2014 [see ref.3]. This set of data was compared with the line-integrated measurements obtained by interferometry that is considered the reference for LID. The final aim was to evaluate the potential of each formulation for complementing the interferometry measurements with the ultimate goal of providing fringe-jump free LID measurements used for density fuelling control and machine protection on JET during future experimental campaigns.

2. Evaluation of the line-integrated density

Line-integrated electron plasma density from polarimetry could be evaluated by five methods, described in details in references [4-6]. Three simplest methods assume that both the Faraday and the Cotton-Mouton effects are small and the mutual coupling between χ and ψ are only of the second-order effect. In these conditions the equation (2) is a good approximation of the rigorous solution of equations (3) and therefore for the initial polarization state $(\psi_0, \chi_0) = (\pi/4, 0)$ parameter W_1 is equal to doubled final ellipticity angle:

$$W_{1\chi} = 2\chi \quad (5)$$

Next two models comes from fact that the ellipticity of the beam could also be described by the phase shift angle δ or Stokes vector component s_3 . These two quantities are related to the polarization angles ψ and χ by formulas $\tan \delta = \tan 2\chi / \sin 2\psi$ and $s_3 = \sin 2\chi$, which in the

case of the initial polarization state $(\psi_0, \chi_0) = (\pi/4, 0)$ and weak F and CM effect, simplify to $\delta = 2\chi$ and $s_3 = 2\chi$. Thus next two approximations for W_1 parameter take a form

$$W_{1\delta} = \delta \quad (6)$$

$$W_{1s} = s_3 \quad (7)$$

Two more sophisticated expressions for parameter W_1 has been proposed in [4] and written in slightly different form in [5]. These two models come from two opposite assumptions:

- A) Ω_3/Ω_1 ratio is constant along the whole path;
- B) Ω_3/Ω_1 ratio is equal zero at the beginning and at the end of laser path into the plasma (pure Cotton-Mouton effect takes place), and tends to infinity at central part of laser path (pure Faraday rotation takes place)

In both cases $\Omega_2 = 0$ is assumed. A detailed description of these two models can be found in the references [4,5] and here only refer to the simplified final form, adjusted to JET polarimetry conditions $((\psi_0, \chi_0) = (\pi/4, 0), B_t \gg B_r, \Delta\psi, \Delta\chi < \pi/4)$:

$$W_{1A} = \arcsin\left(\sqrt{s_1^2 + s_3^2}\right) / \sqrt{1 + \left(\frac{s_1}{s_3}\right)^2} \quad (8)$$

$$W_{1B} = 2 \arctan\left(\frac{s_3}{1 + s_2}\right) \quad (9)$$

where s_i are Stokes vector components: $s_1 = \cos(2\chi)\cos(2\psi)$, $s_2 = \cos(2\chi)\sin(2\psi)$ and $s_3 = \sin 2\chi$.

In our statistical analysis we evaluated the LID from the five models described above as $LID_\chi, LID_\delta, LID_s, LID_A, LID_B$, where interferometry LID is defined, for consistency, as LID_{int}

3. Statistical analysis

The JET FIR diagnostic has 8 channels, 4 vertical and 4 laterals [5]. In the present work we focus on the data provided by the FIR diagnostic core channel (vertical channel 3) only as is the one used for machine protection and density feedback control. The statistical analysis was performed on high performance, 40 JET pulses obtained in July-August 2014, with maximum values: LID measured by interferometer – $2.7 \cdot 10^{20} \text{m}^{-2}$, plasma current – 4.0MA, toroidal magnetic field – 3.7T, the Faraday rotation variation – 0.55rad and the Cotton Mouton effect – 0.24rad. The methodology for the analysis was as follows: for each shot we selected several hundred of temporal points and evenly distributed over pulse length, all adding to a total of 15000 measurement points for the selected database.

Figure 1 shows an example of the comparison of the line-integrated density calculated from polarimetry data and equations (4) – (9) to the interferometric line-integrated density interferometry for pulse 87386. At low plasma densities all approximations give the same LID value. At high plasma densities the best agreement with LID measured by interferometry is for the model assuming constant relative strength of the Faraday and the Cotton-Mouton effects. For almost all analysed temporal points within 87386 shot the difference $\Delta LID_A = LID_A - LID_{int}$ is below one fringe. In this particular example, best agreement between LID from interferometry and polarimetry could be obtain within model “A”.

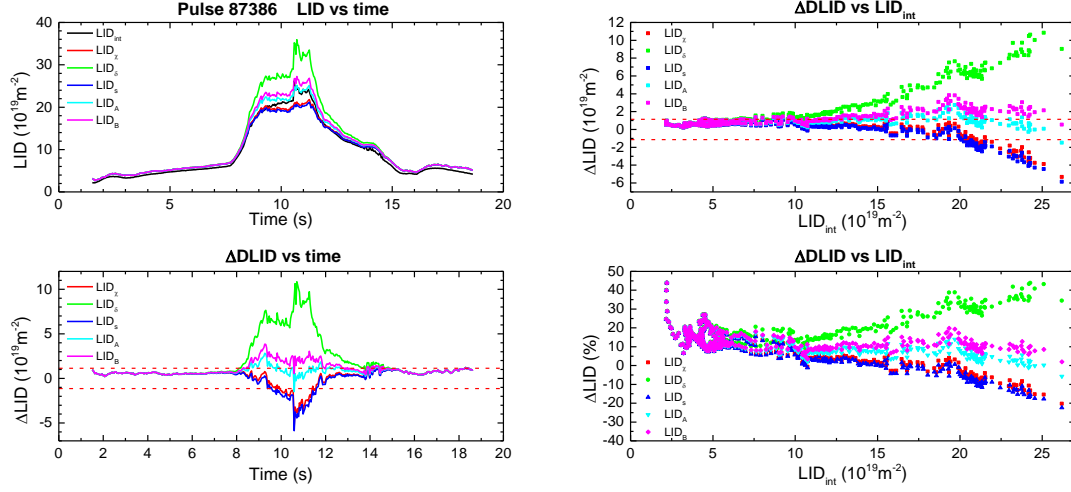


Figure 1. Comparison of line-integrated density LID_{int} obtained from interferometry with line integrated densities calculated from five examined approximations (dashed red lines are the threshold of one fringe $1.143 \cdot 10^{19} m^{-2}$)

The statistical comparison between various polarimetry models for LID and interferometry are depicted in the Figure 2. In all analysed models at high plasma densities there are cases when the maximum discrepancy with respect interferometry is over 3 fringes (about 5-10%). To minimize the difference between line-integrated density value from polarimetry and interferometry, additional model could be proposed for JET channel 3 based on the analysis of empirical data and introducing additional calibration factor such as described below:

$$W_{1B1} = W_{1B} / 1.1 \quad (10)$$

Within this simple mathematical correction, at high plasma densities, the agreement between polarimetry and interferometry in evaluating LID reduces to 1.5 fringe range. A histogram of the results obtained by the simplest model LID_z and empirical model LID_{B1} with respect to LID_{int} is depicted on Figure 3 and associated Table 1.

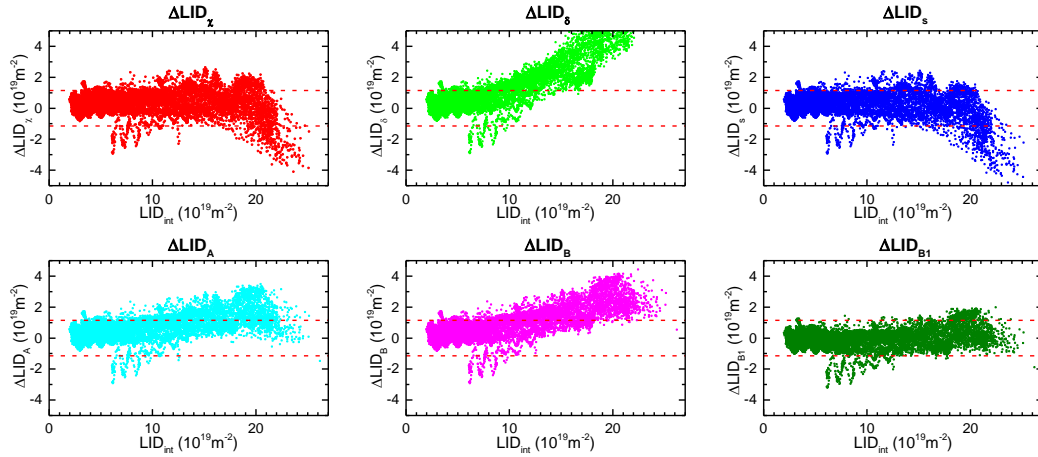


Figure 2. Statistical analysis of the polarimetry LIDs obtained by the five approximation models and the LID density as measured by the interferometer

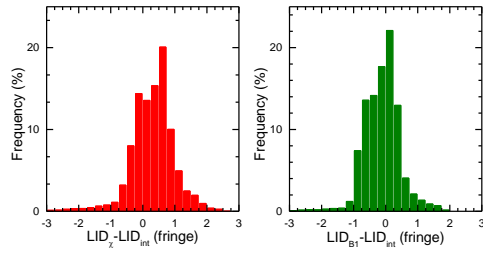


Figure 3. Histogram of difference between LID_χ and LID_{B1} with respect to LID_{int}

$LID - LID_{int}$ interval (fringe)	LID_χ (%)	LID_{B1} (%)
$[-2, -1]$	2,2	2,2
$[-1, 0]$	26,7	53,3
$[0, 1]$	59,0	41,2
$[1, 2]$	10,3	3,1

Table 1: Frequency count of difference between LID_χ and LID_{B1} with respect to LID_{int}

4. Conclusions

Approximation LID_χ , currently used for real-time application at JET, as well as model LID_{B1} are in very good agreement with LID_{int} value in two fringe range (98.2% and 99.8% respectively). However, in more rigorous range of one fringe error level, the advantage of empirical model LID_{B1} described by (10) becomes apparent as it is 95% the agreement with LID_{int} , while approximation LID_χ , given by (2), gives only 86% agreement. At high plasma density range LID_χ overestimate LID value up to 2.5 fringes for some pulses while for other underestimate up to 4 fringes.

Since both the ellipticity and the Faraday rotation angle are available in real time, the approximation LID_{B1} , with an appropriate calibration factor, could be used as a better estimator for the line integrated electron density on JET machine in the view of use for fuelling control and machine protection. However this requires further analysis and development.

Acknowledgement

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euroatom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission

References

- [1] Ch. Fuchs and H. J. Hartfuss, *Line integrated density measurements based on Cotton–Mouton polarimetry*, Rev. Sci. Instrum. **70** (1999) 722
- [2] B.Bieg, J.Chrzanowski, Yu.A. Kravtsov, A. Murari, F. Orsitto, *Two approaches to plasma polarimetry: angular variables technique and Stokes vector formalism*, Nuclear Instruments & Methods In Physics Research Section A **720** (2013) 157-159
- [3] A. Boboc at all, *A novel calibration method for JET Real-Time Far Infrared Polarimeter and integration of polarimetry based line-integrated density measurements for machine protection of a fusion plant*, submitted to Rev. Sci. Instrum.
- [4] K. Guenther and JET-EFDA Contributors, *Approximate method to extract the pure Faraday and Cotton–Mouton effects from polarimetry measurements in a tokamak*, Plasma Phys. Control. Fusion **46** (2004) 1423
- [5] S. E. Segre, V. Zanza, *Derivation of the pure Faraday and Cotton–Mouton effects when polarimetric effects in a tokamak are large*, Plasma Phys. Controlled Fusion **48** (2006) 339
- [6] F. P. Orsitto at all, *modelling of polarimetry measurements at JET*, Plasma Phys. Control. Fusion **50** (2008) 115009