

E. Delabie et al.

# **The Relation Between Divertor Conditions and the L-H Threshold on JET**

(22nd June 2015 – 26th June 2015)  
Lisbon, Portugal

“This document is intended for publication in the open literature. It is made available on the clear understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)”.

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)”.

The contents of this preprint and all other EUROfusion Preprints, Reports and Conference Papers are available to view online free at <http://www.euro-fusionscipub.org>. This site has full search facilities and e-mail alert options. In the JET specific papers the diagrams contained within the PDFs on this site are hyperlinked.

# The relation between divertor conditions and the L-H threshold on JET

E. Delabie<sup>1</sup>, A.V. Chankin<sup>2</sup>, C.F. Maggi<sup>3</sup>, H. Meyer<sup>3</sup>, T.M. Biewer<sup>1</sup>, C. Bourdelle<sup>4</sup>, M. Brix<sup>3</sup>, I. Carvalho<sup>5</sup>, P. Drewelow<sup>6</sup>, C. Guillemaut<sup>5</sup>, N.C. Hawkes<sup>3</sup>, J. Hillesheim<sup>3</sup>, D. Keeling<sup>3</sup>, C. Klepper<sup>1</sup>, A. Meigs<sup>3</sup>, L. Meneses<sup>5</sup>, F. Rimini<sup>3</sup>, G. Sips<sup>3</sup>, E. Solano<sup>7</sup>, M. Stamp<sup>3</sup>, J. Svensson<sup>6</sup> and JET contributors\*

*EUROfusion Consortium JET, Culham Science Centre, Abingdon, OX14 3DB, UK*

<sup>1</sup>*Oak Ridge National Laboratory, Oak Ridge, Tennessee, USA*

<sup>2</sup>*Max-Planck-institut für Plasmaphysik, Garching, Germany*

<sup>3</sup>*CCFE, Culham Science Centre, Abingdon, UK*

<sup>4</sup>*CEA, IRFM, F-13108 Saint-Paul-lez-Durance, France*

<sup>5</sup>*Associação EURATOM-IST, Lisboa, Portugal*

<sup>6</sup>*MPI für Plasmaphysik, Greifswald, Germany*

<sup>7</sup>*Asociación EURATOM-CIEMAT, Madrid, Spain*

\*See the Appendix of F. Romanelli et al., Proc. 25th IAEA Fusion Energy Conf. 2014, Saint Petersburg, Russia

## INTRODUCTION

H-mode access will be required from the early stages of ITER operation onwards to develop plasma scenarios and test control techniques (ELM mitigation, H-mode exit). Knowledge of the L-H threshold power ( $P_{L-H}$ ) is therefore inherent to the planning of the experimental timeline and availability of systems. The anticipated threshold power on ITER (52MW at a density of  $5 \cdot 10^{19} \text{m}^{-3}$  in deuterium) is extrapolated from a multi-machine scaling [1], based on density, magnetic field and machine size. Many other ‘hidden parameters’ are known to affect the threshold. This induces considerable uncertainty in the extrapolation. Because the available heating power on ITER (73MW max.) is only marginally above the expected threshold, there is an ongoing effort to understand the physics behind these additional dependencies and to evaluate if any could be used to lower the power threshold on ITER.

## EXPERIMENTS

Experiments on several machines have reported a strong effect of the divertor configuration and conditions on  $P_{L-H}$  (e.g. JET-C [2], C-Mod [3], DIII-D [4]). Dedicated experiments using slow power ramps (1MW/s) have been carried out on JET-ILW in 2013/14 to investigate this effect with the Be/W wall [5]. A strong increase of  $P_{L-H}$  in the high density branch is found for discharges with the outer strike point (OSP) on the vertical target (VT) compared to discharges in the horizontal target configuration (HT) [6,7]. The threshold decreases further in the HT configuration if the lower triangularity is increased (HT-HLT), moving the inner strike point higher onto the vertical target [5]. Fig. 1a shows  $P_{L-H}$  for the different divertor configurations at 2.4T. No minimum in  $P_{L-H}$  as function of density is observed at 2.4T for the VT configuration. At increased toroidal field (3T) the minimum that is observed in  $P_{L-H}$  for the HT configuration shifts to higher density (see fig. 1b) [5] and is now also observed for the VT configuration, but at lower density than for the HT configuration.

## INTERPRETATION

The currently accepted view is that the L-H transition is caused by the suppression of turbulence by  $E_r \times B$  shear and that the radial electric field well is sustained by the ion diamagnetic term in the force balance equation [8]. Therefore we have investigated if the change in  $P_{L-H}$  could be explained by changes in the edge density and temperature profiles when the divertor configuration is changed [6]. Edge density profiles (Li-beam, reflectometry, Thomson scattering) and temperature profiles (ECE, Thomson scattering, edge

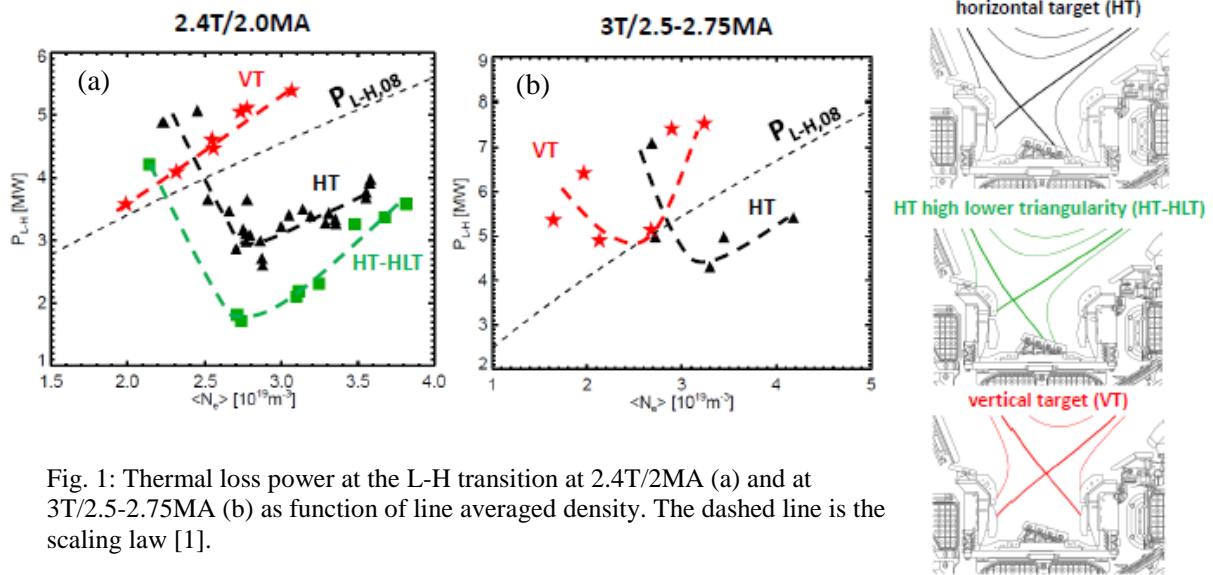


Fig. 1: Thermal loss power at the L-H transition at 2.4T/2MA (a) and at 3T/2.5-2.75MA (b) as function of line averaged density. The dashed line is the scaling law [1].

CXRS) measured in the L-mode phase before the transition have been fitted. For all discharges with edge CXRS data,  $T_e$  was observed to be equal to  $T_i$  in both the high and low density branch. The diamagnetic radial electric field has been derived from the fitted profiles. The density dependence of the threshold shows reasonable agreement with the existence of a critical depth of the diamagnetic  $E_r$  well before the transition for each of the divertor configurations but cannot explain the differences between them as the discharges with higher threshold also exhibit higher edge temperatures and a concomitant deeper  $E_r$  well before the transition [6,7].

The strong variation in threshold power due to relatively small changes in the divertor configuration hints towards changes in the scrape off layer (SOL) directly affecting the transition, rather than indirectly through changes in the upstream kinetic profiles. The shear in the outer part of the  $E_r$  well, where the pedestal forms, is determined not only by the  $E_r$  structure in the plasma edge but also by the radial electric field in the near SOL. We have no direct measurements of the radial electric field structure in the SOL between divertor configurations for these discharges, but we present indications that (1)  $E_r$  in the SOL depends on the divertor configuration and that (2) the SOL  $E_r$  plays a role in the transition.

### SOL $E_r$ IN HORIZONTAL AND VERTICAL TARGET CONFIGURATION

The potential in the SOL relates to the target  $T_e$  profiles through the potential difference over the Debye and magnetic pre-sheath, leading to  $E_r \approx -3 \text{grad}(T_e)/e$  in the SOL [9]. This neglects contributions from radial gradients in the parallel current and pressure gradients, which is a better approximation at the outer than inner strike point. Discharges with the outer strike point (OSP) on the horizontal target have a strongly peaked target  $T_e$  profile, as derived from Langmuir probe data (fig. 2a). This corresponds to a strong positive  $E_r$  in the near SOL. Discharges with the OSP on the vertical target have a much broader target  $T_e$  profile (fig. 2b), leading to a flatter  $E_r$ . To corroborate this interpretation, EDGE2D-EIRENE [10,11] simulations including drifts and parallel currents have been carried out on two pulses, one in HT and one in VT configuration, using identical transport coefficients ( $D_{\perp} = 1 \text{ m}^2 \text{ s}^{-1}$ ,  $\chi_{e,i} = 2 \text{ m}^2 \text{ s}^{-1}$ ), input power (2.6 MW) and similar separatrix density ( $N_{\text{sep}} = 1.0 \cdot 10^{19} \text{ m}^{-3}$  (VT) and  $1.2 \cdot 10^{19} \text{ m}^{-3}$  (HT)). The code results qualitatively reproduce the observed target  $T_e$  profiles (fig. 2ab) and indeed predict a very strong positive  $E_r$  close to the separatrix for the HT configuration, whereas for the VT configuration only a mildly positive  $E_r$  is reached in the outer SOL (see fig. 2c). The strong difference between the two configurations in the code is attributed to the difference in neutral recycling. In VT configuration, the neutrals recycling of the outer divertor target plate are scattered towards the outer divertor leg, broadening the target  $T_e$  profiles, whereas the neutrals in the HT configuration are recycled away from the

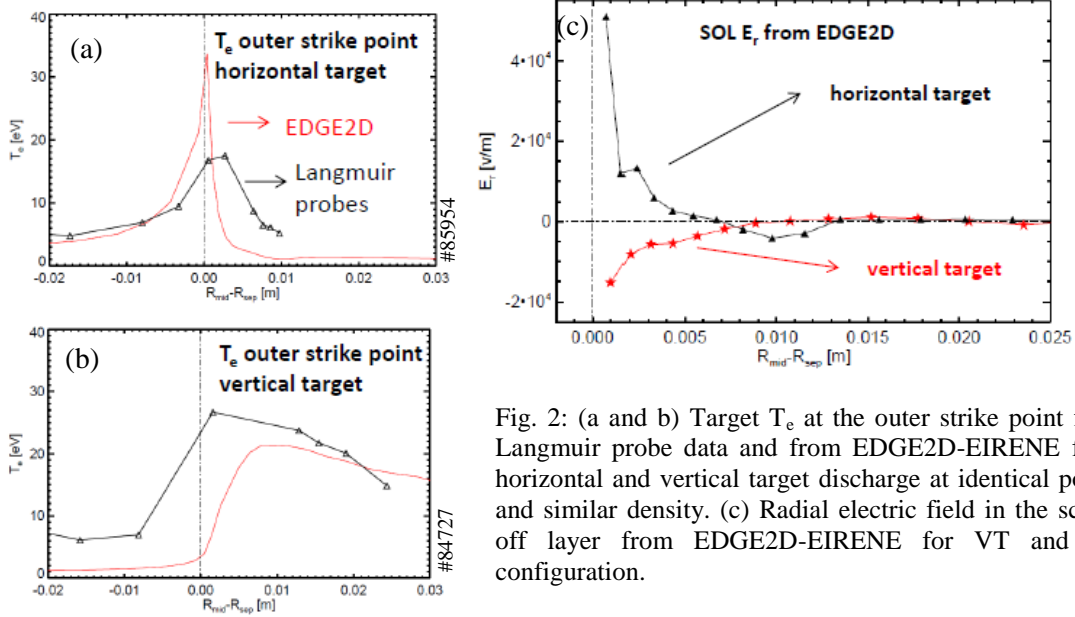


Fig. 2: (a and b) Target  $T_e$  at the outer strike point from Langmuir probe data and from EDGE2D-EIRENE for a horizontal and vertical target discharge at identical power and similar density. (c) Radial electric field in the scrape off layer from EDGE2D-EIRENE for VT and HT configuration.

outer divertor leg. These results were proven to be robust against small variations in assumed input power and separatrix density in the code.

The difference in observed target temperature profiles indicates a more positive  $E_r$  in the SOL for the HT configuration, creating a higher shear in the outer part of the  $E_r$  well, and the EDGE2D-EIRENE modelling supports these observations due to a difference in the recycling pattern of neutrals between HT and VT configuration.

#### CORRELATION BETWEEN DIVERTOR RECYCLING ASYMMETRY AND $P_{L-H}$

The presence of a strong  $E_r$  in the SOL can also be inferred from the effects the  $E \times B$  drifts have on distributing the particle and heat fluxes between the inner and outer divertor targets. For  $B \times \text{grad}(B)$  directed towards the divertor, the  $E \times B$  drift in the main SOL is directed from the inner towards the outer divertor and from the outer to the inner in the private flux region and along the divertor legs. The combined effect of these drifts is an increase in the inner divertor density compared to a situation with no drifts [12]. This asymmetry between inner and outer targets is already observed at power levels well below the H-mode threshold and is most pronounced in the divertor  $D_\alpha$  emission. Fig. 3a shows the evolution of the divertor emission, target temperature and ion fluxes as the power is ramped up in L-mode for a HT configuration discharge. A gradually increasing inner-outer asymmetric recycling pattern is observed, consistent with an increasing  $E_r \times B$  drift effect in the SOL and divertor. This is observed for both HT and VT discharges. For HT discharges, for which we expect a stronger SOL  $E_r$ , a sudden drop of the inner strike point temperature and ion saturation current and a large increase of the  $D_\alpha$  emission in front of the entire inner target is observed. The ratio  $D_\delta/D_\alpha$  increases by a factor 2-3, indicating inner target detachment. This sudden transition is labelled ‘inner detachment’ in fig. 3. These sudden changes in the divertor conditions are usually modulated by the heat fluxes from sawtooth crashes and are therefore referred to as ‘divertor oscillations’ [13]. No change to the upstream profiles is observed during the divertor oscillations in JET-ILW. Remarkably, a sudden increase in the target temperature peaking at the outer strike point is observed, which implies a sudden increase in  $E_r$  in the SOL, as the inner divertor detaches. The critical power at which this occurs always precedes the L-H transition in the high density branch, as illustrated in fig. 3b. At the highest densities in the L-H threshold density scans, the detachment of the inner divertor will immediately trigger an L-H transition, which demonstrates that this state, associated with a higher SOL  $E_r$ , is beneficial for H-mode access.

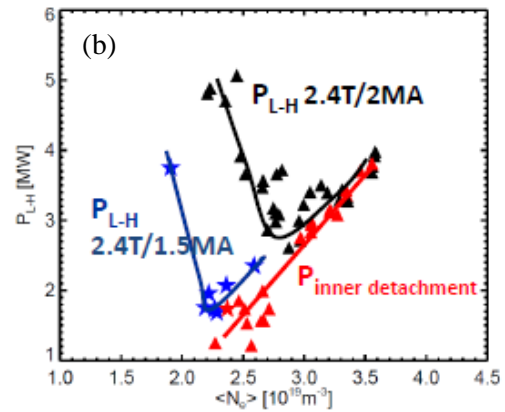
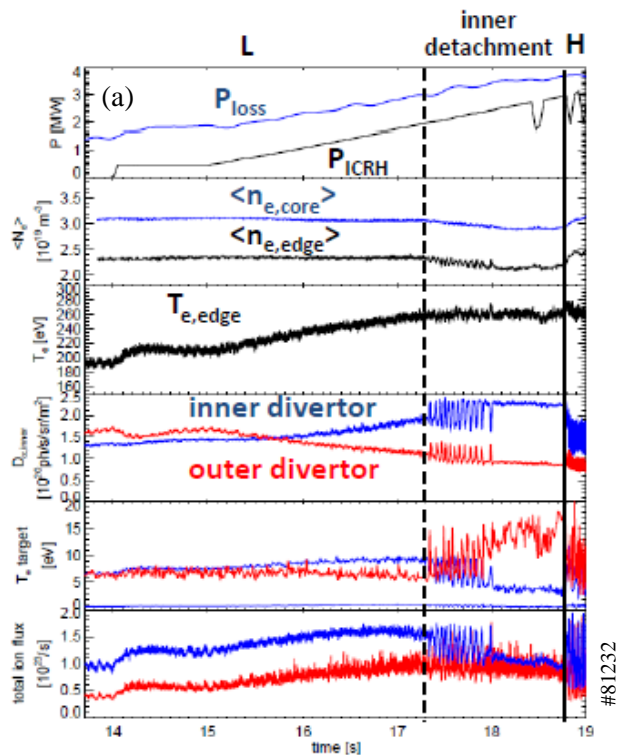


Fig. 3: (a) Evolution of deuterium emission and target temperature and ion flux as the power is ramped up at constant density in L-mode. (b) L-H threshold power and power threshold for detachment of the inner divertor leg.

Dithering L-H transitions ( $\sim 130\text{Hz}$ ), which are only observed in the high density branch, could also be understood through dynamics involving the divertor and SOL conditions. Dithering L-H transitions show very similar oscillations in the deuterium emission pattern as divertor oscillations, except for a short H-mode phase that is triggered from the state with the detached inner divertor leg, associated with the higher SOL  $E_r$ . The H-mode transition itself triggers the re-attachment of the inner divertor and the more symmetric recycling pattern associated with the lower SOL  $E_r$  leading to the H-L back transition.

## OUTLOOK

An increase in edge  $E_r \times B$  shear through the SOL  $E_r$  is proposed as a mechanism to explain the divertor configuration effect on the L-H threshold. Observations on JET-ILW indicate that configurations with a strong inner/outer asymmetry in the divertor recycling pattern are beneficial for H-mode access at reduced power. A better understanding of the physics behind this mechanism could open up prospects of lowering the L-H threshold on ITER through influencing the divertor and SOL conditions.

## ACKNOWLEDGEMENT

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

## REFERENCES

- [1] Y.R. Martin et al., J. Phys.: Conf. Ser. **123** (2008) 012033
- [2] L.D. Horton et al., Proceedings of the 26th EPS (1999)
- [3] Y.Ma et al., Plasma Phys. Control. Fusion **54** (2012) 082002
- [4] P. Gohil et al., Nucl. Fusion **51** (2011) 103020
- [5] C.F. Maggi et al., Nucl. Fus. **54** (2014) 023007
- [6] H. Meyer et al., Proceedings of the 41st EPS conference, Berlin (2014)
- [7] E. Delabie et al., proceeding of the 24<sup>th</sup> IAEA conference, St. Petersburg (2014)
- [8] F. Ryter et al., Nucl. Fus. **54** (8) (2014) 083003
- [9] A.V. Chankin et al., Nucl. Fus. **47** (2007) 479-489
- [10] R. Simoni et al., Contrib. Plasma Phys. **34**, 368 (1994)
- [11] S. Wiesen et al., EDGE2D-EIRENE coupling at JET ([http://www.eirene.de/e2deir\\_report\\_30jun06.pdf](http://www.eirene.de/e2deir_report_30jun06.pdf))
- [12] A.V. Chankin et al., Journal of Nucl. Materials **241-243** (1997) 199-213
- [13] A. Loarte et al., Phys. Rev. Letters **83** (18) (1999) 3657-3660