

R. Ochoukov et al.

# Evolution of ELMy H-mode Performance in Presence of Core Radiation on ASDEX Upgrade

(22nd June 2015 – 26th June 2015)  
Lisbon, Portugal

“This document is intended for publication in the open literature. It is made available on the clear understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)”.

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)”.

The contents of this preprint and all other EUROfusion Preprints, Reports and Conference Papers are available to view online free at <http://www.euro-fusionscipub.org>. This site has full search facilities and e-mail alert options. In the JET specific papers the diagrams contained within the PDFs on this site are hyperlinked.

# Evolution of ELMy H-mode performance in presence of core radiation on ASDEX Upgrade

R. Ouchoukov<sup>1</sup>, V. Bobkov<sup>1</sup>, C. Angioni<sup>1</sup>, M. Bernert<sup>1</sup>, M. Dunne<sup>1</sup>, R. Dux<sup>1</sup>, R. Neu<sup>1,2</sup>, J.-M. Noterdaeme<sup>1,3</sup>, T. Odstrčil<sup>1,2</sup>, T. Pütterich<sup>1</sup>, F. Reimold<sup>1</sup>, the AUG Team, and the EUROfusion MST1 Team

<sup>1</sup>Max-Planck-Institut für Plasmaphysik, Boltzmannstr. 2, 85748 Garching, Germany

<sup>2</sup>Technische Universität München, Boltzmannstr. 15, 85748 Garching, Germany

<sup>3</sup>UGent, Applied Physics Department, 9000 Gent, Belgium

## 1. Introduction

High performance, high temperature tokamak plasmas require that a large fraction of the thermal power that crosses the separatrix from the core ( $P_{\text{sep}}$ ) is radiated away in the form of photons to mitigate heat loads on and erosion of plasma facing components (PFCs). It is common to use nitrogen and/or noble gases, such as neon, argon, or krypton, as a radiating species to transfer the plasma thermal energy into electromagnetic radiation. However, in case of a low- $Z$  number of the radiating species, relatively high concentrations of the radiator must be used, which can impact the fusion reaction rate of the plasma core through dilution. High- $Z$  radiators, on the other hand, are capable of radiating a large fraction of the plasma thermal power, while being present in low ( $\sim 10^{-5}$ - $10^{-4}$ ) concentrations in the plasma core. But, unlike low- $Z$  radiators, it is crucial to maintain control over the core radiation profile to prevent central radiation peaking and subsequent degradation of the plasma performance and the discharge stability. The goal of the study is to determine the feasibility of using controlled core radiation to reduce  $P_{\text{sep}}$ , and hence, heat loads on PFCs, while maintaining high plasma performance in a stable discharge.

The early results on ASDEX Upgrade show that the core plasma performance parameters – the stored plasma energy ( $W_{\text{MHD}}$ ) and the confinement factor ( $H98$ ) – remain robust (Fig. 1 (a) and (b)) as the core radiating power fraction is increased (with tungsten (W) being the dominant radiating impurity). We remind that the radiated power is not included in the definition of  $H98$ . While the radial electron temperature ( $T_e$ ) profiles show a slight drop inside  $\rho_{\text{tor}} < 0.5$  in the high radiation case, the plasma density ( $n_e$ ) profile is little changed in the same region resulting in the plasma stored energy ( $W_{\text{MHD}} \sim n_e T_e$ ) approximately

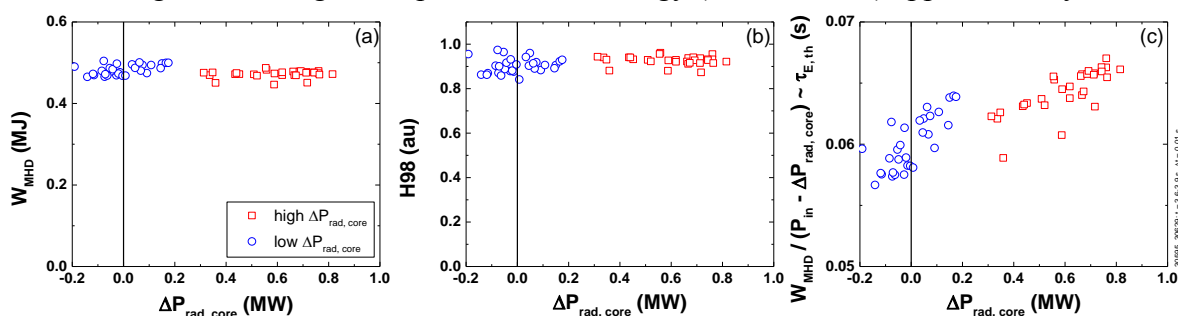


Figure 1: Changes in (a) the plasma stored energy  $W_{\text{MHD}}$ , (b) the confinement factor  $H98$ , and (c) the thermal energy confinement time  $\tau_{E,th}$  as a function of the radiated power from the plasma core  $\Delta P_{\text{rad,core}}$ . The “base”  $P_{\text{rad}}$  value (when  $\Delta P_{\text{rad,core}} = 0$  MW) was 3.5 MW.

constant before and during the high core radiation discharges. A combination of a constant  $W_{\text{MHD}}$  and an increase of the core radiating power fraction suggests that the thermal energy confinement time ( $\tau_{\text{E, th}} \sim W_{\text{MHD}}/(P_{\text{in}} - \Delta P_{\text{rad, core}})$ ), where  $P_{\text{in}}$  is the total incident heating power, constant for these discharges) increases in the high core radiation discharge (Fig. 1 (c)). Data analysis using a time-dependent tokamak transport code TRANSP reveals that the electron heat diffusivity ( $\chi_e$ ) decreases across the plasma core during the high radiation regime, consistent with the observed improvement in  $\tau_{\text{E, th}}$ . Note, that the high radiation regime remains stable for  $\sim 1$  s (equal to the duration of the Ion Cyclotron Range-of-Frequencies (ICRF) power pulse in non-standard phasing [1]). The radial tungsten concentration ( $c_w$ ) profile across the core remains uniform without central peaking. Overall, the early results show a promising (robust) plasma performance in ELMy H-modes on AUG with a high core radiating fraction warranting further study of this scenario either on its own or in combination with other high-Z radiators such as krypton [2].

## 2. Experimental Method

The discharge parameters for this study were: the toroidal magnetic field  $B_T = -2.5$  T and the plasma current  $I_p = 0.8$  MA. The edge safety factor  $q_{95}$  was 5.4. The main ion species was deuterium and the core radiating impurity was tungsten, “seeded” from the active ICRF antenna limiters by operating antennas in non-standard phasing [1], while maintaining a constant ICRF power of 1.5 MW. The plasma shape was a lower single null. The H-mode was maintained by 4.9 MW of neutral beam power. Additionally, 1.4 MW of core electron cyclotron resonance heating (ECRH) was used to prevent tungsten concentration ( $c_w$ ) from centrally peaking.  $P_{\text{in}}$  (including ohmic heating) was  $\sim 8$  MW. Core radiation was monitored with poloidal arrays of soft x-ray (SXR) detectors, sensitive to photons with energies  $>1.8$  keV [3]. The  $c_w$  radial profiles were reconstructed from the SXR emissivity ( $\epsilon_{\text{SXR}}$ ) profiles, assuming that the dominant radiating species in the core was W [4]. The data from these discharges were subsequently analysed using TRANSP to determine the effect of core radiation on electron and ion thermal diffusivities ( $\chi_e$  and  $\chi_i$ ) across the plasma core.

## 3. Experimental Results and Discussion

As a result of central ECRH heating, the discharges showed large sawtooth (ST) oscillations with  $\Delta T_e \sim 1$  keV. In order to account for the observed ST oscillations in these discharges, the plasma profiles were examined just before the ST crash and just after the ST crash. The radial  $T_e$  profiles inside the  $q = 1$  region showed the largest modulation during an ST cycle (Fig. 2 (a)), while the sawtooth induced variations in  $T_i$  and  $n_e$  profiles were small (Fig. 2 (b) and (c)). In the discharges with high core radiation, the  $T_e$  profile was slightly reduced for  $\rho_{\text{tor}} < 0.5$ , with the ST amplitude also being reduced (Fig. 2 (a)). The reduction of  $T_i$  was observed further in, inside the ST inversion radius at  $\rho_{\text{tor}} < 0.31$  (Fig. 2 (b)). The  $n_e$  profile showed a minimal change across the plasma core in the high radiation regime (Fig. 2 (c)). The overall plasma stored energy ( $W_{\text{MHD}} \sim n_e T_e$ ), which is a volume-integrated quantity,

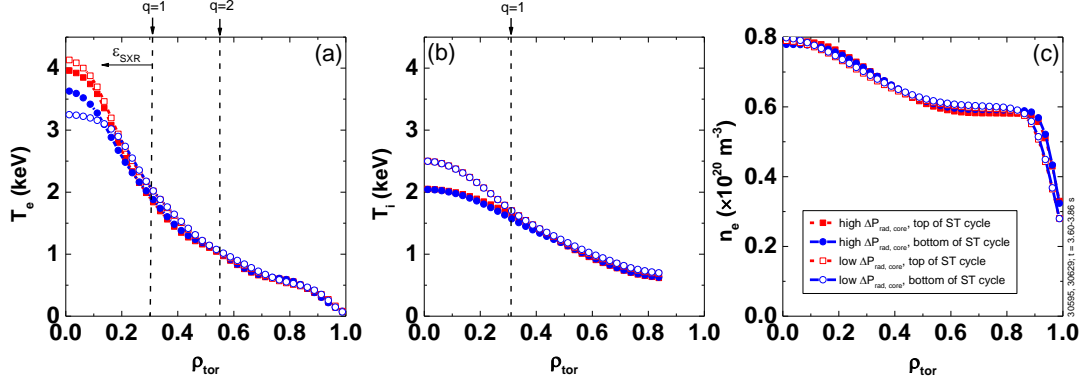


Figure 2: The radial profiles of (a) the electron temperature ( $T_e$ ), (b) the ion temperature ( $T_i$ ), and (c) the plasma density ( $n_e$ ) before and during the discharges with high core radiation. The data is shown for the top and the bottom of a sawtooth (ST) cycle. The radial locations of  $q = 1$  and  $q = 2$  rational surfaces are shown. The radial location of the soft X-ray emission region ( $\epsilon_{SXR}$ ) is also shown.

remained approximately unchanged before and during the discharges with high core radiation (Fig. 1 (a)), as the observed  $T_e$  and  $T_i$  changes occurred over a small plasma volume.

The SXR diagnostic on ASDEX Upgrade is sensitive to photons typically in the energy range of  $>1.8$  keV [3], which happened to coincide with the  $T_e$  and  $T_i$  values inside the ST inversion radius (Figs. 2 (a) and (b)). The  $\epsilon_{SXR}$  profiles showed that the radiation increase in these discharges originated from the plasma core and was influenced by the phase of the ST cycle (Fig. 3 (a)). Note, that the data is shown for four consecutive ST cycles and the cw profiles, averaged over a ST cycle, remained uniform across the plasma core without evidence for peaking (Fig. 3 (b)). The modulation of  $c_w$  during an ST cycle was “in-phase” with the  $T_e$  modulation (Fig. 3 (b)). In all cases the levels of  $c_w$  remained  $\leq 10^{-3}$  in the core.

The lack of a drop in the plasma performance with the increase in the core radiated power (Fig. 1 (a) and (b)) indicates that the transport of thermal energy across the plasma drops (and, hence, improves) with core radiation. Such trend is observed in the thermal energy transport coefficients for the electrons (Fig. 4 (a)) and, to some degree, for the main ions (Fig. 4 (b)), as estimated by TRANSP. The radial  $\chi_e$  values are reduced across the entire confined plasma profile (Fig. 4 (a)), while the  $\chi_i$  values are enhanced inside the sawtooth inversion

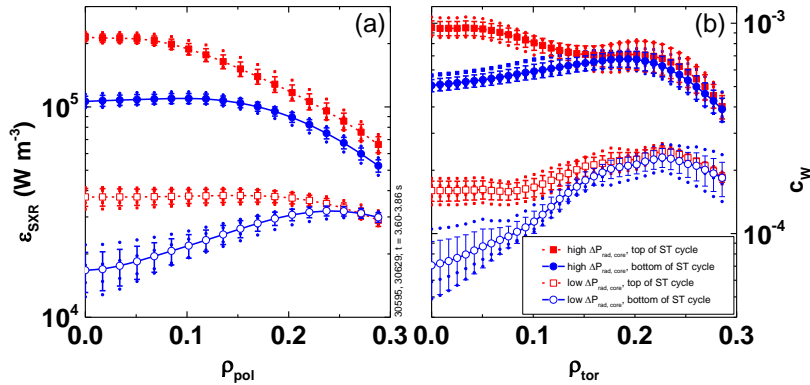


Figure 3: The radial profiles of (a) the measured soft X-ray emissivity ( $\epsilon_{SXR}$ ) and (b) reconstructed tungsten concentration ( $c_w$ ) inside the sawtooth (ST) inversion radius  $\rho_{tor} = 0.31$ . The data is shown for four consecutive sawtooth cycles.

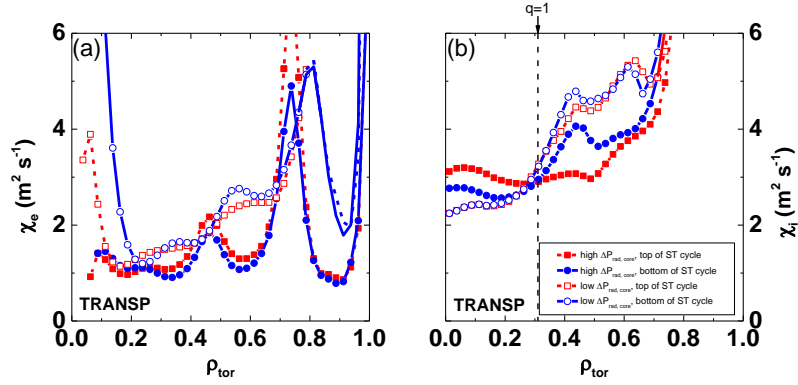


Figure 4: The radial profiles of (a) the electron heat diffusion coefficient ( $\chi_e$ ) and (b) the ion heat diffusion coefficient ( $\chi_i$ ) before and during the discharges with high core radiation. The values are deduced by TRANSP.

radius but are reduced outside the  $q = 1$  region (Fig. 4 (b)) in the presence of core radiation. The observed variation in  $\chi_e$  is expected as the core radiation directly impacts the  $T_e$  profile and, most importantly, the gradient of the  $T_e$  profile ( $\nabla T_e$ ).  $\nabla T_e$ , in turn, sets the electron heat diffusivity across the core. The stiffness of the  $T_e$  and  $n_e$  pedestal profiles has been analysed previously [5] and shown to be equally stiff before and during the discharges with high core radiation. This further constrains the radial plasma pressure profile to remain constant, and, in turn, the heat transport coefficients to become reduced. The situation with  $\chi_i$  is more complex, as the  $T_i$  profiles depend on the strength of the electron-ion coupling. Note that the opposite effect – no change in  $W_{\text{MHD}}$  with an increase in core ECRH heating – was previously observed on AUG [6] and is linked to  $\nabla T_e$ ,  $\nabla T_i$ , and  $n_e$  via collisionality [6].

#### 4. Conclusion

Discharges with high core radiation fraction were examined to determine the applicability of core radiation as a means of mitigating thermal heat loads on the plasma facing components, while maintaining stable, high-performance core plasma. W “seeded” by an active ICRF antenna operated in non-standard phasing was used to change the core radiated power. The early results reveal that  $W_{\text{MHD}}$  and H98 factor remain robust in the discharges with high core radiation. Since the increase in  $P_{\text{rad}}$  originates from the core due to the presence of W, it implies that  $\tau_{E, \text{th}}$  is improved in the discharges with high core radiation.

#### 5. Acknowledgements

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

#### 6. References

- [1] V. Bobkov et al., 21<sup>st</sup> Topical Conference on RF Power in Plasmas, May 2015.
- [2] M. Bernert et al., these proceedings, 2015.
- [3] V. Igochine et al., Internal IPP Report “IPP 1/338”, May 2010.
- [4] M. Sertoli et al., Plasma Phys. Control. Fusion **57** 075004, 2015.
- [5] R. Ochoukov et al., 41<sup>st</sup> EPS Conference on Plasma Physics, June 2014.
- [6] A. Manini et al., Plasma Phys. Control. Fusion **46** 1723, 2004.