

V. Bobkov, G. Arnoux, S. Brezinsek, J.W. Coenen, L. Colas, M. Clever,
A. Czarnecka, F. Braun, R. Dux, A. Huber, P. Jacquet, C. Klepper, E. Lerche,
C. Maggi, F. Marcotte, M. Maslov, G. Matthews, M.L. Mayoral, K. McCormick,
A. Meigs, D. Milanesio, I. Monakhov, R. Neu, J.-M. Noterdaeme, Th. Pütterich,
F. Rimini, G. Van Rooj, G. Sergienko, D. Van Eester
and JET EFDA contributors

ICRF Specific Plasma Wall Interactions in JET with the ITER-Like Wall

“This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

The contents of this preprint and all other JET EFDA Preprints and Conference Papers are available to view online free at www.iop.org/Jet. This site has full search facilities and e-mail alert options. The diagrams contained within the PDFs on this site are hyperlinked from the year 1996 onwards.

ICRF Specific Plasma Wall Interactions in JET with the ITER-Like Wall

V. Bobkov¹, G. Arnoux⁵, S. Brezinsek², J.W. Coenen², L. Colas³, M. Clever²,
A. Czarnecka⁴, F. Braun¹, R. Dux¹, A. Huber², P. Jacquet⁵, C. Klepper³, E. Lerche⁶,
C. Maggi¹, F. Marcotte³, M. Maslov⁵, G. Matthews⁵, M.L. Mayoral⁵, K. McCormick¹,
A. Meigs⁵, D. Milanese⁸, I. Monakhov⁵, R. Neu¹, J.-M. Noterdaeme¹, Th. Pütterich¹,
F. Rimini⁵, G. Van Rooj⁸, G. Sergienko², D. Van Eester⁶
and JET EFDA contributors*

JET-EFDA, Culham Science Centre, OX14 3DB, Abingdon, UK

¹*Max-Planck-Institut für Plasmaphysik, EURATOM Association, Garching, Germany*

²*Institute of Energy and Climate Research, Association EURATOM-FZJ, Germany*

³*CEA, IRFM, F-13108 St Paul-lez-Durance, France*

⁴*Association EURATOM-IPPLM, Hery 23, 01-497 Warsaw, Poland*

⁵*EURATOM-CCFE Fusion Association, Culham Science Centre, OX14 3DB, Abingdon, OXON, UK*

⁶*LPP-ERM/KMS, Association Euratom-Belgian State, TEC partners, Brussels, Belgium*

⁷*Associazione EURATOM-ENEA sulla Fusione, Politecnico di Torino, Italy*

⁸*Institute for Plasma Physics Rijnhuizen, Association EURATOM-FOM, Nieuwegein, Netherlands*

* See annex of F. Romanelli et al, "Overview of JET Results",
(23rd IAEA Fusion Energy Conference, Daejeon, Republic of Korea (2010)).

ABSTRACT.

A variety of Plasma Wall Interactions (PWIs) during operation of the so-called A2 ICRF antennas is observed in JET with the ITER-like wall. Amongst effects of the PWIs, the W content increase is the most significant, especially at low plasma densities. No increase of W source from the main divertor and entrance of the outer divertor during ICRF compared to NBI phases was found by means of spectroscopic and WI (400.9nm) imaging diagnostics. In contrary, the W flux there is higher during NBI. Charge exchange neutrals could be excluded as considerable contributors to the W source. The high W content in ICRF heated limiter discharges suggests the possibility of other W sources than the divertor alone. Dependencies of PWIs to individual ICRF antennas during q_{95} -scans, and intensification of those for the -90° phasing, indicate a link between the PWIs and the antenna near-fields. The PWIs include heat loads and Be sputtering pattern on antenna limiters. Indications of some PWIs at the outer divertor entrance are observed which do not result in higher W flux compared to the NBI phases, but are characterized by small antenna-specific (up to 25% with respect to ohmic phases) bipolar variations of WI emission. The first TOPICA calculations show a particularity of the A2 antennas compared to the ITER antenna, due to the presence of long antenna limiters in the RF image current loop and thus high near-fields across the most part of the JET outer wall.

1. INTRODUCTION

Heating and current drive system using waves in the Ion Cyclotron Range of Frequencies (ICRF) is an attractive candidate for future fusion devices, because of, among other reasons, unique properties such as selectivity of the heated plasma species and of their energy distribution functions. However, ICRF specific Plasma Wall Interactions (PWIs) which affect the lifetime of Plasma-Facing Components (PFCs) and lead to release of impurities including high-Z elements, need to be controlled. The JET tokamak with its newly operated ITER-Like Wall (ILW) provides the possibility to study these PWIs with PFC configuration similar to ITER. The whole divertor and the divertor entrance as well as some recessed PFCs on the inner and the outer walls are covered by bulk tungsten (W) or W-coated tiles, whereas the first limiting surfaces at the outer and the inner walls are pure beryllium (Be) tiles.

It is known that ICRF operation can lead to deposition of additional heat loads due to RF sheath effects [1]. ICRF operation can also lead to release of Be and high-Z impurities such as W [2] and nickel Ni [3]. This paper presents the first experimental results on characterization of these issues using the so-called A2 ICRF antennas in JET with the ILW. The emphasis is made on impurity release during ICRF, in particular W. Some findings from the dedicated papers on ICRF specific Be sputtering [4] and heat loads [5], both being not critical for JET operation, are discussed. A brief discussion is made at the end on the ways to extrapolate the experience with the A2 antennas to the ICRF antennas in ITER.

On one hand, the change of impurity content in plasma during ICRF can be attributed to an

increase of impurity sources at the walls, as in ASDEX Upgrade with W-coated ICRF antenna limiters [2]. On the other hand, the impurity content is affected by changes of transport plasma properties in the core, due to the heating and effects on the fast particle population [6], or in the Scrape-Off Layer (SOL) by enhanced density convection driven mainly by the RF sheaths [7]. Impurity sources can be driven by 3 main mechanisms: a) thermal (melting); b) sputtering by ions; c) sputtering by fast particles including Charge eXchange (CX) neutrals. For (a) and (b), the sheath effects are the most likely contributors to the impurity sources [7], either by sputtering or (less likely) by melting high-Z surfaces. In this respect, a special attention should be paid to the magnetic field line connections going from active ICRF antennas to high-Z PFCs, where the RF sheaths are driven by high antenna near fields, in particular parallel electric field E_{\parallel} .

2. ICRF SYSTEM AND DIAGNOSTICS

Presently the JET ICRF system includes four 4-strap A2 antennas (A, B, C, D, see Fig.1), with straps powered individually within an antenna. In the experiments reported here, dipole ($0\pi0\pi$) and -90° ($0 -\pi/2 -\pi -3/2$) phasings were used, correspondingly with symmetric (dominant $k_{\parallel} \approx 6.6\text{m}^{-1}$) and asymmetric (countercurrent, dominant $k_{\parallel} \approx 3.3\text{m}^{-1}$) spectrum. Antennas A and B are connected via 3dB splitters and are operated simultaneously. Only half of antennas A and B (A12 and B12) were used for this study. Hydrogen (H) minority in deuterium D heating scheme at $f_{\text{ICRF}} = 42\text{MHz}$ was utilized with a typical H concentration between 2 and 6%.

The concentration of W in the plasma c_{WQC} is estimated from QuasiContinuum(QC) emission at wavelengths around 5nm [8], measured by a VUV spectrometer on a vertical line of sight. The emission corresponds to W ionization stages W27+ to W35+. These stages have maximum abundance at $T_e \approx 1.5\text{keV}$. Interpretation of the line radiation of W42+ to W45+ near 6nm gives c_{WL} which accounts for a more central W content at $T_e = 2$ to 3keV.

Figure 1 presents W source diagnostics. The visible divertor spectroscopy system [9] is used to characterize WI (400.9nm) emission and the W source from the main divertor area. A camera system [10] with a narrow-band (1 nm broad) filter and an intensifier is used to characterize the WI emission on a larger area of the outer divertor and its entrance including the top of tile 8 and tile B (see Fig.1), at which magnetic field connections exist to active ICRF antennas. The camera is installed at the outer wall in octant 1 close to the equatorial plane of the torus and provides a view of the divertor and the divertor entrance mostly at octant 2. The view includes single tiles 8 and tiles B near antenna A and those near antenna B. The locations are connected to all ICRF antennas along magnetic field lines, due to the large size of the A2 antennas and their limiters. To produce a profile across the outer divertor from the camera images, an array of diagonally arranged 50 spots (10×10 pixels each) is used which covers tiles 8 and tiles B. The data has to be treated with care, because of the emission near the WI (400.9nm) spectral line includes background plasma radiation, mainly due to bremsstrahlung, and reflections from the metallic environment.

A spectroscopy system usually devoted to charge exchange measurements was used to characterize

the Be sputtering with additional information from visible video cameras [4]. Infrared cameras which were cross-calibrated against thermocouples were used for heat load studies [5].

3 EXPERIMENTS

3.1 IMPURITY CONTENT

Figure 2 shows that application of ICRF power results in radiated power which is higher compared with Neutral Beam Injection (NBI) heating. This comparison is made at the same line average density. In L-modes with ICRF heating close to central deposition, values of c_{WQC} and c_{WL} indicate that the c_W profile is hollow in the center. This is not the case with NBI for which the profile is peaked at low central density with low values of c_W at the edge. Cases with off-axis ICRF heating indicate a c_W profile close to flat.

From Figure 2 it can be seen that W is the main radiator during ICRF. Calculation of power radiated by W is based on flat $c_W = c_{WQC}$ and is overestimated compared to the measured core radiation, because c_{WL} is lower than c_{WQC} . For the flat c_W profiles during off-axis heating one estimates W radiation fraction in the range 60% to 80%. A significant fraction of the rest of the radiated power can be related to nickel (Ni) which behaves similarly to the previous campaigns at JET with carbon wall [3].

Interestingly, the high radiation during ICRF operation does not compromise the energy stored in plasma in L-modes. However in the range of densities below the minimum in the L-H threshold power dependence, such as in the case in Fig. 2, the higher radiation during ICRF operation leads to higher power requirement to access H-modes compared to NBI [11].

Figure 3 presents the dependence of the increase of c_{WQC} on the line averaged edge density for different ICRF powers and confinement conditions. Indeed, both the density and the ICRF power are the most relevant empirical parameters which influence the W content in the plasma during ICRF. In low density discharges with a toroidal magnetic field of $B_t = 2.55T$, the concentration is measured at the normalized plasma radius of $\delta = 0.5 \pm 0.1$. The radius decreases to 0.3 ± 0.05 for higher density and when the magnetic field is decreased to $B_t = 2.4T$. Although this decrease of the measurement radius can contribute to the decrease of c_{WQC} when the density is increased, it cannot explain the steep dependence, especially for the $B_t = 2.4T$ case with off-axis heating. Higher edge density in L-mode means higher D injection rate: in a low triangularity ($\delta = 0.27$) an edge density of $1.7 \times 10^{19} \text{ m}^{-3}$ corresponds to a D injection rate of about $2 \times 10^{21} \text{ el/s}$. For high power ($P_{NBI} > 14\text{MW}$, $P_{ICRF} = 2\text{MW}$) H-mode data from Fig.3 c_W often shows peaked behaviour, so c_{WQC} represents the W content not completely. For this H-mode data set, data with higher ICRF power are required.

A similar dependence of concentration on edge density can be found for Ni. Such significant decrease of high-Z concentrations has also been observed with carbon wall in JET [3] and is in line with a number of processes which happen during density increase: a) decrease of impurity source at higher D density, in part due to decrease of concentrations of light impurities; b) change in plasma transport properties towards worse impurity confinement; c) direct dilution of impurities in the plasma.

3.2 W SOURCES

The relation of central and edge values of c_W from Fig.2 for the ICRF and the NBI phases implies a larger number of W ions crossing the separatrix into the plasma core in the ICRF case. One of the explanations to this could be an increased W source at PFCs, in particular from the divertor, because it has the largest W area interacting with the plasma. However, on the contrary, Fig.4 for Pulse No: 81852 demonstrates that deep in the divertor, emission at the WI spectral line which represents the W source at the surfaces, prevails during the NBI phase over that during the ICRF phase. The same also applies to the outer divertor entrance including the top of tile 8 and tile B. Both for Fig.4a (WI spectroscopy) and Fig. 4b (WI imaging), the WI emission is averaged in time during the constant heating power of 3.5MW during the NBI and the ICRF phases. Such picture is observed for all the NBI versus ICRF comparisons conducted so far at low to medium densities, where the WI imaging measurements can be applied. An estimation using the WI spectroscopy system for cross-calibration and the simplified constant factor $S/XB = 20$, used to estimate a W flux from the WI emission, gives an estimate of maximum W flux observed by the WI imaging on the top of tile 8 in Pulse No: 81852 of the order of $3 \times 10^{17} \text{ m}^{-2} \times \text{s}^{-1}$ during the NBI phase. Compared to the value of $5 \times 10^{18} \text{ m}^{-2} \times \text{s}^{-1}$ averaged over the strike point region, the W influx from the tiles is considerable, because of a higher particle penetration probability to the core plasma from from tile 8 and tile B compared to that from the main divertor [13].

The somewhat lower W source during ICRF compared to the NBI phase in Pulse No: 81852 can be attributed to a lower time-averaged electron temperature T_e in the divertor during ICRF at the same heating power [12]. Due to larger sawteeth during ICRF, variations of T_e in the divertor are larger. Selecting the phases during ICRF with the same T_e as with NBI, the W source at strike points during ICRF is about 25% higher than that during NBI. One of the candidates to explain this is an increased Be content in the plasma observed during ICRF. Using W sputtering data by Be [14] with the extended Bohdanský's formula [15] this implies a similar relative increase of Be concentration for T_e around 50eV measured in Pulse No: 81852 near strike points. This is compatible with the increase of the Be level in the plasma observed during ICRF.

Although no additional W source is measured during ICRF phases, there are some indications of ICRF specific interactions at the entrance of the outer divertor. This can be seen in the series of discharges with q_{95} -scan and modulated ICRF pulses of 1MW from individual antennas. The WI imaging measurements on the top of tile 8 near antenna B (see Fig.1) are summarized in Fig.5 in terms of relative changes of WI emission intensity during ICRF with respect to the ohmic phases $\Delta I_{\text{RF}} / I_{\text{ohmic}}$ at the same q_{95} -value. The maximum observed value $\Delta I_{\text{RF}} / I_{\text{ohmic}} = 0.25$ corresponds to a change of W flux by $\approx 10^{17} \text{ m}^{-2} \times \text{s}^{-1}$. Figure 5 indicates more complex interactions than just an increase of the W source, especially in the case of the -90° phasing (Fig.5b) where the WI emission decreases at higher q_{95} values. Individual responses to different antennas can be seen, less in the dipole case with the high plasma shape ($\delta = 0.42$) in Fig.5c for which the magnetic field lines starting at the antennas divert towards the deeper regions of the divertor. The difference between

the antennas are distinctive in Fig.5a,b. However, the shapes of the WI emission dependencies on q_{95} have some degree of similarity between each other, making it difficult to distinguish a possible spatial W sputtering pattern from consequences of a more global change of the SOL during the q_{95} -scan. These WI imaging measurements are well reproducible from discharge to discharge. The issue of the background plasma emission is likely not to play a significant role in these cases, because utilization of an additional background subtraction, based on the intensity in the gap between tile 8 and tile B and the assumption on local behaviour of the WI emission near the PFCs, leads to similar results, albeit with larger error bars. The influence of reflections can not be fully excluded.

Thus, although there is an increase of W content when ICRF is switched on compared to pure NBI phases, the measurements of WI emission from the main divertor area and from the entrance of the outer divertor do not corroborate the picture of an increased W source from the divertor at fixed heating power. A strong toroidal asymmetry of ICRF-specific W sources which would not be covered by WI imaging camera during the q_{95} -scan could in theory explain this behaviour. Given the variety of the toroidal locations scanned during the q_{95} -scans, this would imply a very strong and very localized W source. Other wall components such as tile C, and a number of outer and inner wall W-coated components, not visible by the diagnostics, are potential W sources. So far no consistent observation of the change of W content in the plasma exists for changes of the clearance between the plasma and the outer wall. Interesting observations exist in limiter discharges. Even in limiter plasmas the ICRF phases are characterized with higher c_W compared to the NBI phases. The ICRF discharges with $P_{ICRF} = 2\text{MW}$ are represented by filled black circles in Fig.3. The values of c_{WQC} are well within the ballpark of the divertor discharges at the same line average edge density. Moreover, when in such a limiter discharge the plasma is shifted upwards away from the divertor, providing better magnetic isolation between the divertor and the antennas, c_{WQC} does not decrease. Assuming, that W sputtering by CX neutrals can be excluded, this suggests that W sources other than from the divertor can play a role.

3.3 ROLE OF CX NEUTRALS IN W SPUTTERING

In fact, for the energy range of up to 30keV, the fast particle analyzer data favors higher W release by charge exchange particles in the case of NBI heating. In this energy range most of the fast particles are detected and the W sputtering yield is highest [15]. The ICRF phases are characterized by significantly higher neutral H flux compared to NBI, whereas the NBI phase are accompanied by significantly higher D flux compared to ICRF. For Pulse No: 81852, where the density is low and the detected CX neutral fluxes are high, one estimates with the help of the energy dependence of the W sputtering yield from [15], that $8.7 \times 10^{11} \text{ m}^{-2} \cdot \text{s}^{-1}$ W flux (integrated over the energy range) is due to neutral H in the ICRF case, and $9 \times 10^{11} \text{ m}^{-2} \cdot \text{s}^{-1}$ of W flux is due to neutral D in the NBI case. Even considering a large affected areas, in the case of an isotropic distribution of the particles in the relevant energy range, these numbers are too low to play a significant role for the W content in the plasma.

3.4 ROLE OF SHEATH EFFECTS

A variety of observations has been made in the experiments which depend on antenna phasing. The -90° phasing of the ICRF antennas is generally characterized by intensified PWIs compared to the dipole case. Figure 6 shows this for the W content per MW of ICRF power. Other observations during the -90° phasing include increased heat loads at the antenna PFCs [5] and increased Be sputtering at the antenna limiters [4].

The heat loads increase with near-antenna density and with the ICRF power. The spectroscopic observations of the increased Be sputtering at the limiters are consistent with spatial sputtering patterns moving in accordance with magnetic field connections to active ICRF antennas. Whereas the limited experimental data obtained so far do not allow to pin down the mechanism responsible most for the increased W content in the plasma, the observations of the local heat loads and the Be sputtering patterns hint directly to the enhanced sheath phenomena. In particular, sheaths driven by the antenna near-fields are of interest.

Figure 7 shows first $E_{||}$ calculations for the A2 antenna using TOPICA [17] (same code as used to model the ICRF antennas in ITER) with a 3D antenna model adapted to flat geometry and JET L-mode plasma density and temperature profiles. Scaled to ITER relevant ICRF power, $E_{||}$ absolute values for the A2 antenna are a factor of > 2 higher than the $E_{||}$ values in front of the ITER antenna for the high density reference profiles [19]. A more significant difference of $E_{||}$ at the A2 antenna compared to the ITER antenna is the distribution of the fields along the whole length of the long poloidal limiters at JET. The long poloidal limiters are substantial parts of the A2 antenna image RF current loop in JET. This is because of limited other surfaces available for the RF currents to flow, strengthened by the fact that the antenna PFCs are connected to the antenna boxes via narrow shorts close to the antenna-plasma interface. Thus $E_{||}$ cover almost the whole height of the outer wall at JET starting down at the divertor entrance. Design of such protruding antenna has to be optimized. The design strategies include: a) increased RF conducting surfaces to short circuit RF image currents; b) antenna strap arrangement to better compensate the (0π) phased image current contributions. An example of such approach is the planned 3-strap antenna in ASDEX Upgrade [16]. In ITER the ICRF antenna will be recessed and not protruding, with efficient RF image current screening around the antenna straps which gives much lower area affected by $E_{||}$ than for the A2 antenna, both on absolute and on relative spatial scale.

The TOPICA near field calculations alone give the first idea, but no sufficient ground to make predictions to ITER, because the advanced non-linear sheath modelling such as in [18,19] has to be further developed and validated with experimental observations of heat loads and impurity release in JET and other machines. This is the topic of further studies.

SUMMARY

First experimental observations in JET with the ILW show that, increased Be sputtering and increased local heat loads at the antenna PFCs during ICRF do not have any impact on JET operation, whereas

increased W content has an influence at low densities. When the edge density is increased, the W content in the plasma is reduced strongly. No increased W source during ICRF compared to NBI was found in the main divertor area and at the outer divertor entrance from the WI (400.9nm) emission measurements. Nevertheless observations show individual responses of the WI emission at the outer divertor entrance to the ICRF antennas, with more variation during the 90° phased operation. A high W content in limiter plasmas hints at other possible W sources than the divertor. CX neutrals could be excluded as strong contributors to the W source. Phasing dependence of observations on W, Be and the heat loads, with evidences of importance of magnetic field line connection to active antennas, points on the RF near field phenomena. Neither the effect on W source, nor the effect of ICRF induced SOL changes on W penetration inside core plasma could be excluded. First TOPICA runs with an adapted A2 antenna model shows distribution of parallel RF electric field along the whole height of the antenna limiters which cover most of the SOL starting from the outer divertor entrance. This is different to the ITER antenna where the near fields are better contained within the antenna vicinity. Predictions towards future machines require development of advanced sheath modeling via its validation on existing experimental data available from many machines.

ACKNOWLEDGEMENTS

This work was supported by EURATOM and carried out within the framework of the European Fusion Development Agreement. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

REFERENCES

- [1]. P. Jacquet et al., Nuclear Fusion **51** (2011) 103018.
- [2]. V.I. Bobkov et al., Journal of Nuclear Materials **415** (2011) S1005.
- [3]. A. Czarnecka et al, accepted to Plasma Physics and Controlled Fusion, IOP preprint EFDA-JET-PR(11)17.
- [4]. C. Klepper, this conference, Poster P1-86.
- [5]. Ph. Jacquet, this conference, Poster P1-20.
- [6]. C. Angioni, Physics of Plasmas textbf14 (2007) 055905.
- [7]. D.A. D'Ippolito and J.R. Myra, Journal of Nuclear Materials **415** (2011) S1001.
- [8]. T. Pütterich et al., Plasma Physics and Controlled Fusion **50** (2008) 085016.
- [9]. A. Meigs, this conference, Poster P1-89.
- [10]. A. Huber et al, submitted to Review of Scientific Instruments (HTPD conference) (2012).
- [11]. C. Maggi et al., EPS Conference 2012.
- [12]. G. Van Rooj et al., this conference, Invited talk I-3.
- [13]. J. Strachan et al., W screening factors, private communication.
- [14]. C. Bjorkas et al., this conference, Contributed talk O-31.
- [15]. R. Behrisch, W. Eckstein (Eds.), Sputtering yields, Springer, Springer-Verlag (2007).

- [16]. A. Kallenbach et al., IEEE Transactions on Plasma Science **40** (2012) 605.
 [17]. V. Lancellotti et al., Nuclear Fusion **46** (2006) S476.
 [18]. D.A. D'Ippolito et al., AIP conference Proceedings **1406** (19th RF top. conf. 2011) 195.
 [19]. J. Jacquot et al., AIP conference Proceedings **1406** (19th RF top. conf. 2011) 211.

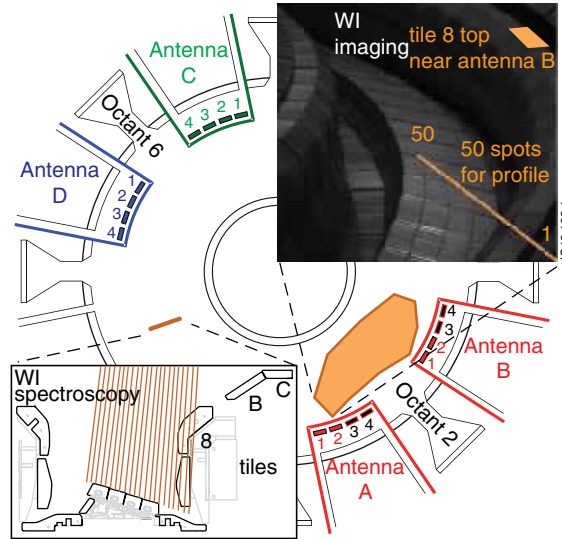


Figure 1: Arrangement of ICRF antennas and W source diagnostics in the divertor.

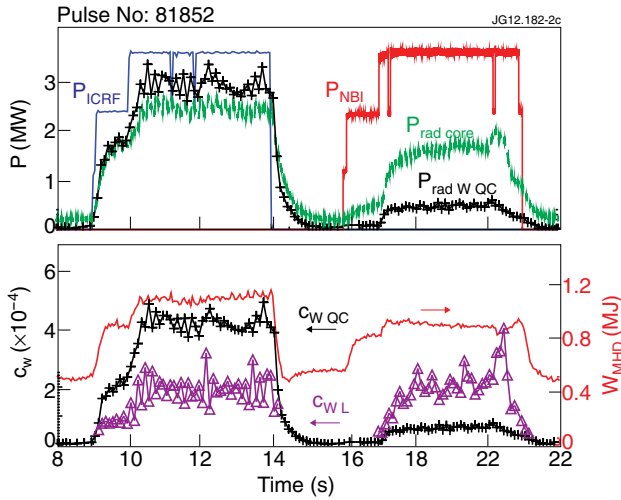


Figure 2: Comparison of ICRF and NBI heating in Pulse No: 81852 with $B_T = 2.55T$ and $f_{ICRF} = 42MHz$. Upper graph: solid lines without symbols - applied ICRF and NBI power, crosses - radiated power estimated using c_{WQC} , dashed line - measured core radiation. Lower graph: solid line with crosses - c_{WQC} measured at $\rho_{QC} = 0.6 \pm 0.1$ during ICRF and at $\rho_{QC} = 0.5 \pm 0.2$ during NBI; solid line with triangles - c_{WL} measured at $\rho_L = 0.25 \pm 0.1$ during ICRF and at $\rho_L = 0.2 \pm 0.1$ during NBI.

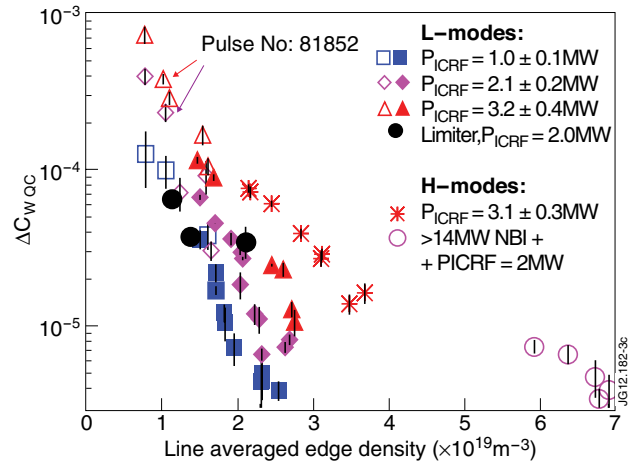


Figure 3: Dependence of change of c_{WQC} during ICRF on line averaged edge density. Open squares, diamonds and triangles: $B_T = 2.55T$, $I_p = 2.5MA$, low shape; stars, filled squares, diamonds and triangles: $B_T = 2.4 T$, $I_p = 2MA$, low shape; open circles: $B_T = 2.7T$, $I_p = 2.5MA$, high shape; closed circles: $B_T = 2.5 T$, $I_p = 2 MA$, limiter shape.

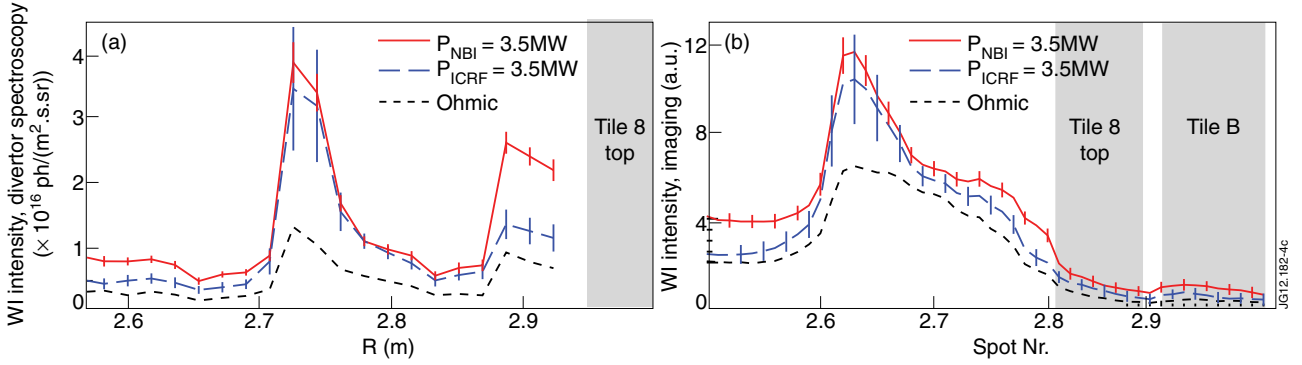


Figure 4: WI emission at 400.8 nm from the WI spectroscopy (a) and the WI imaging (b) in Pulse No 81852 for ohmic only, ICRF and NBI heated phases (3.5MW phases). Top of tile 8 is indicated, which appears larger on the WI imaging system due to viewing geometry.

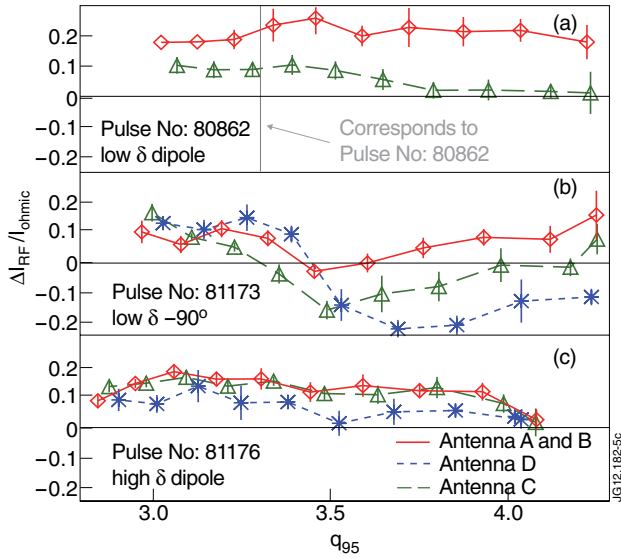


Figure 5: Relative change of WI intensity at the top of tile 8 near antenna B during 1 MW of ICRF with respect to ohmic phases, deduced from the WI imaging: a) low with dipole; b) low with -90° ; c) high with dipole.

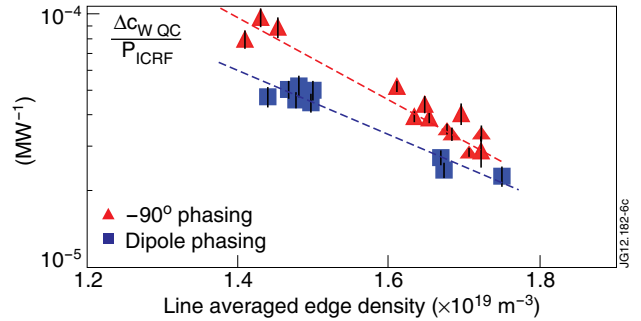


Figure 6: Comparison of c_{wQC} in the dipole and the -90° ICRF (only A and B) powered L-modes.

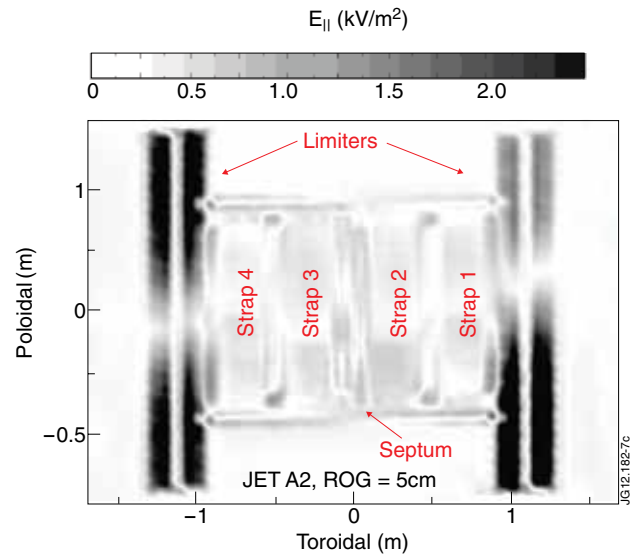


Figure 7: TOPICA calculations of $E_{||}$ in front of $(0\pi0\pi)$ phased JET A2 antenna in L-mode, normalized to 1MW coupled to antenna.