

V. Petrzilka, M. Goniche, G. Corrigan, J. Ongena, V. Bobkov, L. Colas,
A. Ekedahl, P. Jacquet, M.-L. Mayoral and JET EFDA contributors

SOL Density Variations During ICRF Heating and Gas Injection

“This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

“Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EFDA, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK.”

The contents of this preprint and all other JET EFDA Preprints and Conference Papers are available to view online free at www.iop.org/Jet. This site has full search facilities and e-mail alert options. The diagrams contained within the PDFs on this site are hyperlinked from the year 1996 onwards.

SOL Density Variations During ICRF Heating and Gas Injection

V. Petrzilka¹, M. Goniche², G. Corrigan³, J. Ongena⁴, V. Bobkov⁵, L. Colas²,
A. Ekedahl², P. Jacquet³, M.-L. Mayoral³ and JET EFDA contributors*

JET-EFDA, Culham Science Centre, OX14 3DB, Abingdon, UK

¹*Association EURATOM-IPP.CR, Za Slovankou 3, 182 21 Praha 8, Czech Republic*

²*CEA, IRFM, F-13108 Saint-Paul-lez-Durance, France*

³*EURATOM-CCFE Fusion Association, Culham Science Centre, OX14 3DB, Abingdon, OXON, UK*

⁴*Association EURATOM-Belgian State, Koninklijke Militaire School - Ecole Royale Militaire, B-1000
Brussels Belgium*

⁵*Max-Planck-Institut für Plasmaphysik, EURATOM Association, Garching, Germany*

** See annex of F. Romanelli et al, "Overview of JET Results",
(23rd IAEA Fusion Energy Conference, Daejeon, Republic of Korea (2010)).*

Preprint of Paper to be submitted for publication in Proceedings of the
39th European Physical Society Conference on Plasma Physics, Stockholm, Sweden
2nd July 2012 - 6th July 2012

ABSTRACT

In this paper, we present modeling results of the effect of gas injection on the SOL (Scrape-off-layer) density profiles (n_{eSOL}) during ICRF (Ion Cyclotron Resonance Frequency) heating. Gas injection during ICRF has been tested in several tokamaks with the goal of improving the coupling by modifying the density profile in front of the antenna, thus facilitating the fast wave propagation through the evanescent layer [1-4].

INTRODUCTION

The EDGE2D / NIMBUS code was adapted to model the presence of a wide SOL and a magnetic geometry with a 2nd X-point near to the top of the wall (as in JET Pulse No's: 68109-13 [3,5]). In contrast to the computational grid for the configurations considered in [6] that have a SOL width of about 10cm at the Outer Mid-Plane (OMP), EDGE2D simulations with the 2nd X point at the top are only carried out considering about 4cm of SOL in the OMP. This is because the EDGE2D computational grid is restricted to a rather narrow OMP SOL layer in these ITER relevant configurations. One possibility is then to continue into the far SOL with "ad hoc" assumptions about transport with essentially 1D model. This then prohibits the modeling distant from the separatrix using EDGE2D. Following previous work [7], we have attempted to overcome this problem and to maintain the modeled SOL width at about 10cm by introducing a limiter (particle sink) protruding radially down from the top. Then, the locations radially near the antenna front face are connected to the wall, similarly to the above mentioned ITER-like configuration with a 2nd X-point at the top. In the modeled 2D geometry discussed in this paper, the gas puff location is by definition magnetically connected to the ICRF antenna location. We assume that the ICRF wave does not contribute to ionization of the neutral gas by local SOL RF energy absorption/heating. The SOL ionization and related n_{eSOL} increase are due to increased SOL temperature, similarly as during any core heating. The power crossing the separatrix from the core to the SOL was set to 10MW plus ICRF power from 0 to 3MW. It is known that the SOL diffusion coefficient significantly varies with the SOL plasma temperature and density [8], themselves varying with the gas puff. Therefore, we considered several values of the diffusion coefficient D and heat diffusivities in the simulations, similarly as in [6]. The particle (and heat) diffusion coefficients were set to constant $0.1\text{m}^2/\text{s}$ value from the core to the separatrix and to either the same value of $0.1\text{m}^2/\text{s}$ also in the SOL (case a) or to various constant values up to $2\text{m}^2/\text{s}$ in the SOL (case b). Figure 1 compares n_{eSOL} for OMP and top gas injection for case a and shows well the lower efficiency of the top gas injection compared to the OMP one. This difference is similar for all values of D considered in the computations.

The computed OMP outward shift of the FW cut-off density for JET scenarios described in [3] ($2 \times 10^{18} \text{m}^{-3}$), as a function of the gas puff, is shown in figure 2 for zero ICRF power (blue) and for 2MW of ICRF power (red). It can be seen that the density shift depends on the additional power only marginally, in agreement with [2]. We also compared simulated n_{eSOL} profiles with experimental ones from RCP (Reciprocating Probe) and Li-beam measurements for JET Pulse No's: 68111-68113 that had various gas injection rates from different locations [3]: - Pulse No: 68111: no gas injected

from the OMP (Gas Injection Module GIM 6), 1×10^{22} el/s injected from the divertor (GIM9 and GIM10); - Pulse No: 68112 : 4×10^{21} el/s gas injected from GIM6, 1×10^{22} el/s injected from GIM9 and GIM10; - JET Pulse No: 68113: no additional gas injected. For case a) D profile, the comparison with experiments was rather poor, and we do not show it in figures. Figure 3 shows comparison of the simulations for case b) profiles with $D = 1 \text{ m}^2/\text{s}$ further out in the SOL. However, a reasonable fit of the simulation results with experimental data was obtained only after enlarging twice the radial scale when plotting the modeling results. This can be explained as follows: According to [8], it is often observed on JET that the density radial variation in the SOL follows an exponential decay. From a simple diffusion model, $\lambda_n \approx (D L/c_s)^{1/2}$ where c_s is the acoustic speed, and L is the connection length. The enlargement of the radial scale in figure 3 can be therefore considered as a corresponding enlargement of the diffusion coefficient D and of the SOL width. In simulations shown in figure 3, we did not use divertor gas injection, only top and OMP gas injection. As can be seen, top and OMP gas injection is approximately of the same efficiency for the $n_{e\text{SOL}}$ enhancement in the RCP/Li-beam location. The OMP gas injection is more efficient for OMP $n_{e\text{SOL}}$ enhancement also in this case, similarly as is also shown in figure 1. For a still better fit to experimental data, we further enlarged D in the modeling to $1.75 \text{ m}^2/\text{s}$ further out in the SOL, cf. figure 4. The divertor puff in simulations gives more precise fit of simulations to experiments in far SOL, as shows next figure 5. This figure contains comparison of modeling with shot #68112 data, for the same gas puff rates and locations in simulations as were that used in the experiment. Note that the top gas puff lower efficiency for OMP $n_{e\text{SOL}}$ enhancement compared to the OMP puff, is nevertheless untrue if one looks at the $n_{e\text{SOL}}$ at the RCP or Li beam locations (see blue squares and stars on figure 3), which are more near to the gas puff location at the top of the wall. We also note that the computed profiles are radially shifted to the right by about 2.5cm in order to fit the simulations as well as possible to the RCP and Li-beam data in the far SOL. The exception is the profile without the puff (Pulse No: 68113), where the computed profile is shifted by 1cm only. The shift was needed because the modeled SOL width of 9cm is smaller than the radial outer gap (ROG = 14cm at the RCP – Li beam measurement time 8s) in the experiments. Even if the best fit to experiments is found for the largest diffusion coefficient D (figure 5), we think that it is useful to show also the trends with varying D value, and therefore to show the results for lower D values in the other figures: D can vary in various experimental conditions. To conclude, the modeling results for OMP gas puff are for larger values of D in SOL not far from the experimental results, as is seen in figures 3, 4 and 5. To our opinion, the modeling and experiments do not indicate that a significant direct SOL ionization by ICRF wave takes place in experiments, in contrast to the case of the Lower Hybrid (LH) heating [3, 4]. With significant direct SOL ionization in the experiments, like at LH heating, the modeled and measured profiles typically exhibit strong local $n_{e\text{SOL}}$ enhancement, even a density bump [6, 7]. Let us note that for the case of LH wave launching, only introduction of enhanced ionization [6] was successful for fitting the data to the modeling curves [3,4,7]. Observations from ASDEX-U [4] by Li-beam and interferometry exhibit similar $n_{e\text{SOL}}$ increase and outward shifts of the cut-off density as that found in simulations at similar gas puff rates. In agreement with some observations [2], the OMP

gas puff is in the simulations more efficient for the OMP density enhancement (figures 1,2) than the TOP gas puff. Therefore, the OMP gas puff location should be preferred also in experiments for the purpose of OMP n_{eSOL} enhancement. The gas puff rate is needed a bit higher in simulations than it is in the experiments. The reason might be that it is not possible in the 2D model used to include effects of the distance between the gas puff location and the antenna on the density profile in front of the antenna, while experiments show that the smaller is this distance, the larger is the beneficial effect on the antenna loading [1, 2].

ACKNOWLEDGEMENTS

This work was supported by EURATOM and carried out within the framework of the European Fusion Development Agreement. The views and opinions expressed herein do not necessarily reflect those of the European Commission. V. P. acknowledges support of the Czech Science Foundation Grant 205/10/2055, and of MSMT CR Grant LG11018.

REFERENCES

- [1]. M.-L. Mayoral et al., 23rd IAEA Conference 2010, Daejeon, Korea, paper ITR/P1-11.
- [2]. R. I. Pinsker et al., paper O4.124, 37th EPS Conference 2010.
- [3]. M.-L. Mayoral et al., 17th Topical Conf. on RF power in Plasmas, AIP Conf. Proc. 933 (2007), p55.
- [4]. P. Jacquet et al., Nuclear Fusion **52** (2012) 042002.
- [5]. V. Petržilka et al., 38th EPS Conf. 2011. P4.099; A. Ekedahl et al., PPCF 54 (2012) 074004.
- [6]. M. Goniche et al., Plasma Physics and Controlled Fusion **51** (2009) 044002.
- [7]. V. Petržilka et al.: paper P4.207, 36th EPS Conf. 2009; Plasma Physics and Controlled Fusion **54** (2012) 074005.
- [8]. P. C. Stangeby et al., Plasma Physics and Controlled Fusion, **32**. (1990) 475.

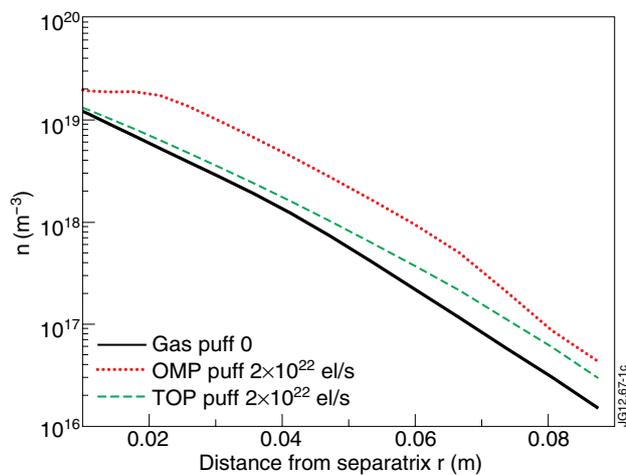


Figure 1: OMP n_{eSOL} profiles, TOP and OMP gas puff 2×10^{22} el/s and ICRF power level of 2MW.

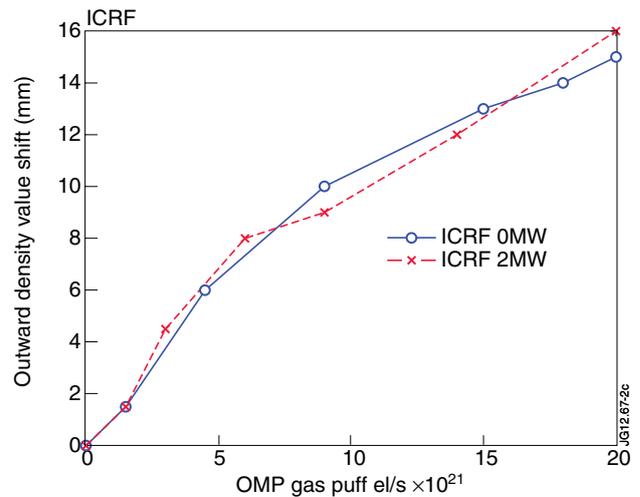


Figure 2: Outward OMP shift of the cut-off density value of $2 \times 10^{18} \text{ m}^{-3}$. (JET scenarios [3]) for different OMP gas injection levels.

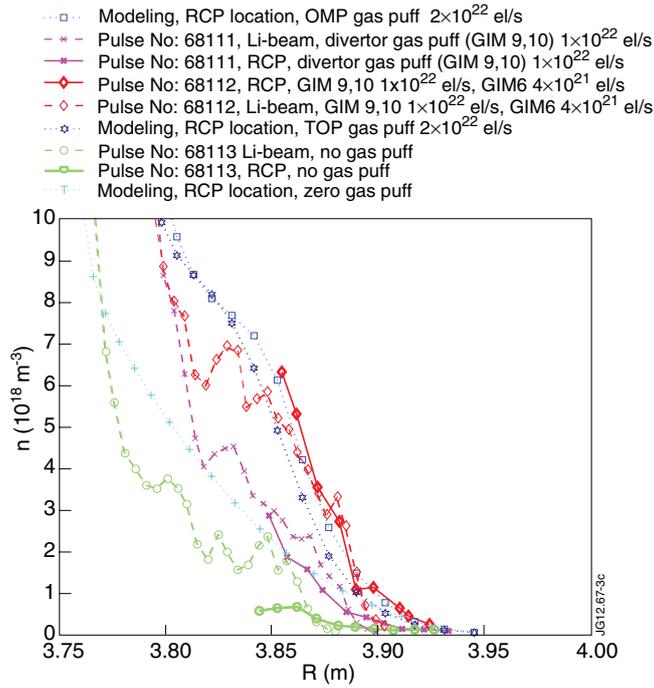


Figure 3: Comparison of n_{eSOL} profiles simulations at the RCP and Li beam locations with the JET experimental profiles using $D = 1 \text{ m}^2/\text{s}$. The RCP and Li beam measurements were done at 8s, at ROG 14cm.

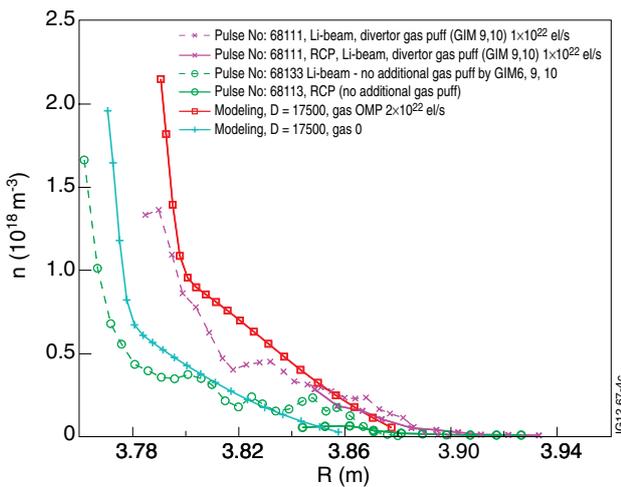


Figure 4: Comparison of n_{eSOL} profiles simulations at the RCP and Li beam locations with the JET experimental profiles using $D = 1.75 \text{ m}^2/\text{s}$. For the red modeling curve, the modeling separatrix is at $R = 3.79 \text{ m}$.

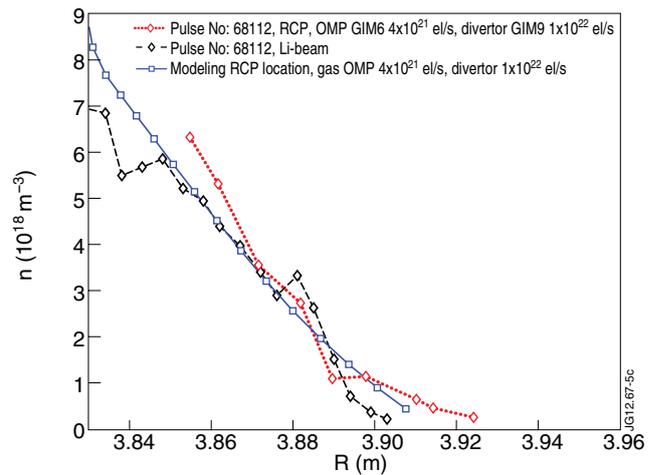


Figure 5: Comparison of n_{eSOL} profiles simulations at the RCP and Li beam locations with the experimental profiles from Pulse No: 68112 using $D = 1.75 \text{ m}^2/\text{s}$ and using the same gas puff as in the experiment. The modeling separatrix is at the coordinate $R = 3.82 \text{ m}$.